





2x04P 2x05P Shape
Scale : 1:0.7

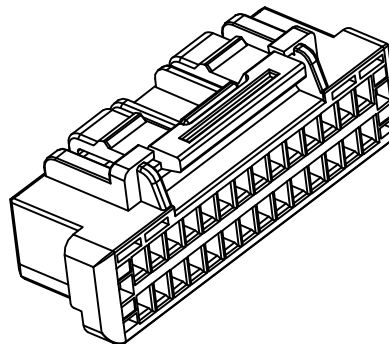




Specifications:
规格:
Voltage rating:100V AC/DC
额定电压: 100V AC/DC
Current rating:1.5A AC/DC
额定电流: 1.5A AC/DC
Withstanding voltage:500V AC/minute
耐受电压: 500V AC/分钟
Temperature range:-40℃- 105℃
温度范围: -40℃- 105℃
Insulation resistance: 500M
绝缘电阻: 500M
Contact resistance: 20m
接触电阻: 20m

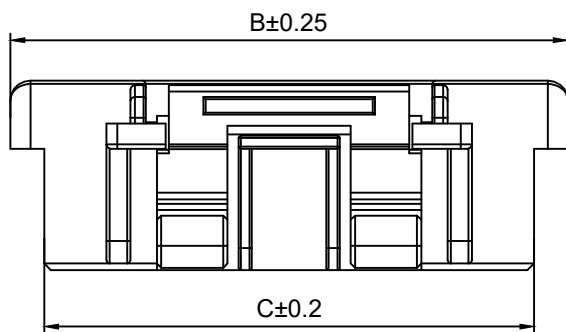

2x06P 2x15P Shape
Scale : 1:1

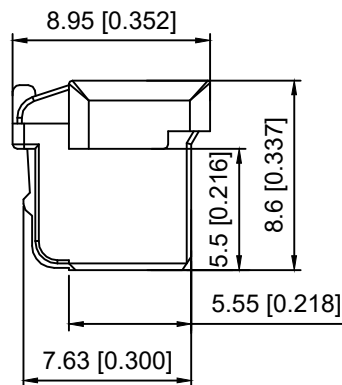

2x06P 2x09P视图
Scale : 1:1

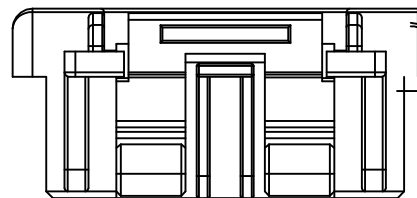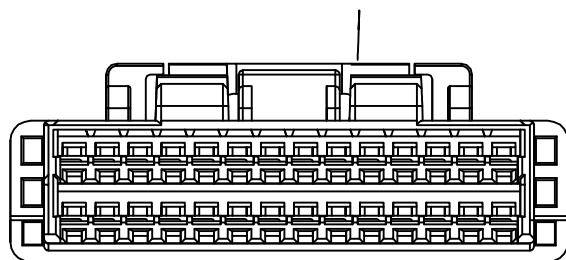

2x10P 2x17P视图
Scale : 1:1

Poles	Dimensions mm		
	A	B	C
2x04	4.50	10.30	7.25
2x05	6.00	11.80	8.75
2x06	7.50	13.30	10.25
2x07	9.00	14.80	11.75
2x08	10.50	16.30	13.25
2x09	12.00	17.80	14.75
2x10	13.50	19.30	16.25
2x11	15.00	20.80	17.75
2x12	16.50	22.30	19.25
2x13	18.00	23.80	20.75
2x14	19.50	25.30	22.25
2x15	21.00	26.80	23.75
2x16	22.50	28.30	25.25
2x17	21.00	29.80	26.75

1515 H - 2xXX - PT
① ② ③ ④

- Series No
- Category:H-HSG
- Row No.Pin No:2xXX-2x04 2x17P
- Material:PT-PBT UL94V-0 Natural

ECN BO.		DESCRIPTION.		DATE.	REV.	SCALE: 3:1
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER	2015/5/3	A	
Mikey	Tom	Jerry	PART NAME	1515H-2x13	UNLESS OTHERWISE SPECIFIED,TOLERANCE:	X. ±0.25
			MODEL NAME	1515H-2x13		X.x ±0.20
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD		X.xx ±0.15
					ANGULAR	±3'
						FILE. NO.

