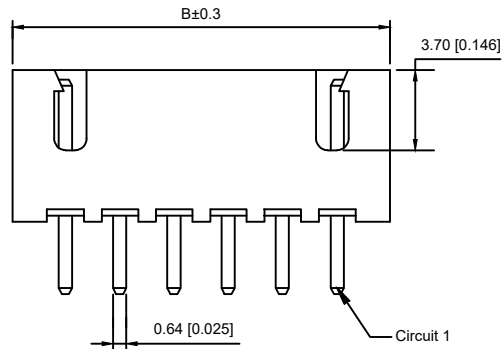

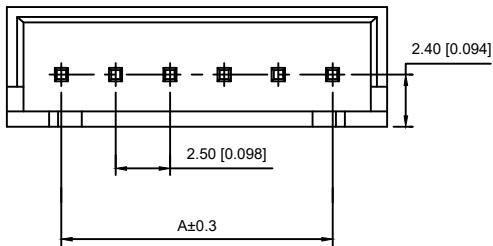


Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25 C 85 C
- Insulation resistance: 1000M
- Contact resistance: 10m
- After environmental testing : 20m

- ① Series No.
- ② Category : W-WAFER
- ③ Wedding Board Angle : V-Stright 180
- ④ Row No.-Pin No.: XX-02P 20P
- ⑤ Material : N0-PA66 46-PA46 94V-0
- ⑥ Plating Category: Sn-Bright Tin Plating

Poles	Dimensions mm		Poles	Dimensions mm	
	A	B		A	B
02	2.50	7.50	12	27.50	32.50
03	5.00	10.00	13	30.00	35.00
04	7.50	12.50	14	32.50	37.50
05	10.00	15.00	15	35.00	40.00
06	12.50	17.50	16	37.50	42.50
07	15.00	20.00	17	40.00	45.00
08	17.50	22.50	18	42.50	47.50
09	20.00	25.00	19	45.00	50.00
10	22.50	27.50	20	47.50	52.50
11	25.00	30.00			

8821WV-XX	PA46 UL 94V-0	Brass	Tin-Plated	8821H
8821WV-XX-N	Nylon 66 UL 94V-0			
PART NO	Material	Material	pin Finish	pin Suitable Hanyones Terminal

		new		2015/5/3		A			
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	8821WV-04-R	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X. ±0.25		
			MODEL NAME	8821WV-04-R			X.x ±0.20		
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD		X.xx ±0.15			
							ANGULAR	±3'	
				FILE. NO.					