


Specification Sheet

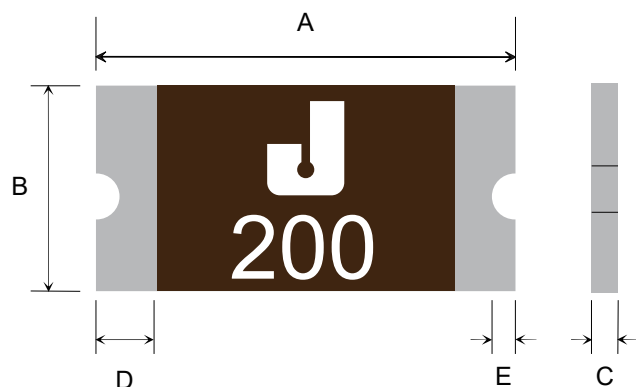

Terminal Pad Solderability

Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

Terminal Pad Materials

Gold-Plated Nickel-Copper
Lead-Free, RoHS Compliant

Marking

Part Identification
ASMD1812-200-16V = J200

TABLE I. DIMENSIONS

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
ASMD1812-200-16V	4.37	4.73	3.07	3.41	0.50	1.10	0.30	0.25

Unit: mm

TABLE II. PERFORMANCE RATINGS

Model	V_{max} (V dc)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R_{imin} (Ω)	R_{1max} (Ω)
ASMD1812-200-16V	16.0	100	2.00	4.00	0.8	8.0	2.00	0.020	0.100

Recognition:UL Approved.