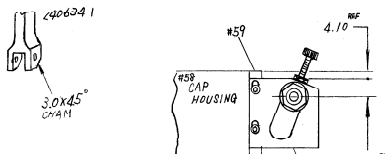


KEY:

-  **RECOMMENDED SPARES.**
-  **LUBRICATE DAILY USING NO. 20 MACHINE OIL.**
-  **GREASE LIGHTLY.**

面取り側を図示方向
で取り付けのこと。

REG. NO.	DESCRIPTION	NO. SEC.	PART NO.	DESCRIPTION	THIS APPLICATOR WILL APPLY																																						
	△組立時面取りの事。 			CRIMPING DATA <table><thead><tr><th>PAD LETTER</th><th>CRIMP HEIGHT</th><th>WIRE SIZE</th><th>WIRE STRIP LENGTH</th></tr></thead><tbody><tr><td>A</td><td>1.75</td><td>3 (#12)</td><td>5.5 REF</td></tr><tr><td>B</td><td>1.49</td><td>2 (#14)</td><td>5.5 REF</td></tr><tr><td>C</td><td>1.34</td><td>1.25 (#16)</td><td>5.5 REF</td></tr><tr><td>D</td><td>1.24</td><td>0.85 (#18)</td><td>5.5 REF</td></tr></tbody></table> <table><thead><tr><th>WIRE</th><th>SIZE</th><th>TYPE</th><th>FEED</th></tr></thead><tbody><tr><td>INSULATION</td><td>1.04</td><td>TND LGRH</td><td></td></tr><tr><td></td><td>5.57</td><td>0</td><td>18.9</td></tr></tbody></table> <table><thead><tr><th>INSULATION RANGE</th><th>WIRE RANGE</th><th>APPLICATOR INSTRUCTION</th></tr></thead><tbody><tr><td>#2-8 - #4.1②</td><td>#18 - #12</td><td>#B031</td></tr></tbody></table> REMARKS A-O-L or G-TERMINATOR PRE-FEED (30MM STROKE) 取付適用規格 114-5122	PAD LETTER	CRIMP HEIGHT	WIRE SIZE	WIRE STRIP LENGTH	A	1.75	3 (#12)	5.5 REF	B	1.49	2 (#14)	5.5 REF	C	1.34	1.25 (#16)	5.5 REF	D	1.24	0.85 (#18)	5.5 REF	WIRE	SIZE	TYPE	FEED	INSULATION	1.04	TND LGRH			5.57	0	18.9	INSULATION RANGE	WIRE RANGE	APPLICATOR INSTRUCTION	#2-8 - #4.1②	#18 - #12	#B031	175057
PAD LETTER	CRIMP HEIGHT	WIRE SIZE	WIRE STRIP LENGTH																																								
A	1.75	3 (#12)	5.5 REF																																								
B	1.49	2 (#14)	5.5 REF																																								
C	1.34	1.25 (#16)	5.5 REF																																								
D	1.24	0.85 (#18)	5.5 REF																																								
WIRE	SIZE	TYPE	FEED																																								
INSULATION	1.04	TND LGRH																																									
	5.57	0	18.9																																								
INSULATION RANGE	WIRE RANGE	APPLICATOR INSTRUCTION																																									
#2-8 - #4.1②	#18 - #12	#B031																																									