


PIN	A±0.1	B±0.1	C±0.1	D±0.1
2P	4.35	2.65	1.00	3.25
3P	5.35	3.65	2.00	4.25
4P	6.35	4.65	3.00	5.25
5P	7.35	5.65	4.00	6.25
6P	8.35	6.65	5.00	7.25
7P	9.35	7.65	6.00	8.25
8P	10.35	8.65	7.00	9.25
9P	11.35	9.65	8.00	10.25
10P	12.35	10.65	9.00	11.25

3D View

- Specifications:
- 1.Rated Voltage : 50V AC/DC
 - 2.Rated Current : 1A AC,DC
 - 3.Withstand Voltage : 200V AC/minute
 - 4.Contact Resistance : 50mΩ(MAX.)
 - 5.Insulation Resistance : 100MΩ(MIN.)
 - 6.Storage Temperature Range: -40°C~+85°C;
 - 7.Operation Temperature Range: -25°C~+70°C;

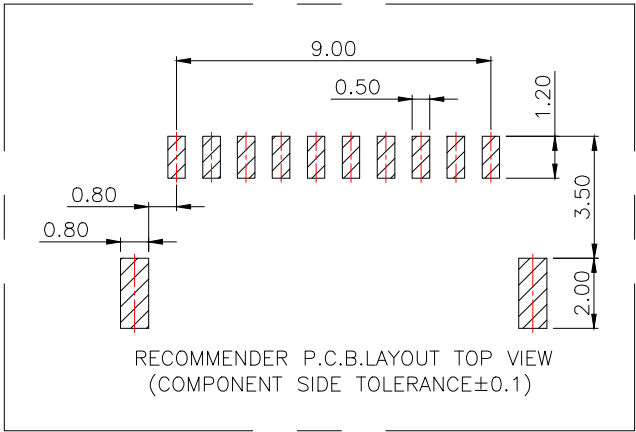

3	插片	黄铜H65	镀镍锡	
2	插针	黄铜H65	镀镍锡	
1	基座	LCP	本色	
序号	品名	材质	电镀/颜色	备注
MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES		 TITLE: WAFER 1.00 卧贴		
DECIMALS:		PAR		
.X:±0.25		DWN		
.XX:±0.15		CHKD		
.XXX:±0.05		APVD		
ANGLES:		SCALE 1:1		
X°.±5°		UNIT:MM		
X.X°.±3°		SIZE:A4		
X.XX°.±1°		SHEET:1F1		
CUSTOMER COPY		REV:A		