



CASE FINISH	CURRENT (AMPS)	WORKING VOLTAGE				MAXIMUM DC RESISTANCE (OHMS)	MAXIMUM VOLTAGE DROP		MINIMUM CAPACITANCE (uF)	MIN. INSERTION LOSS PER MIL-STD-220, FULL LOAD, +25°C																		
		-55°C TO +85°C		-55°C TO +125°C			DC			DC		AC		14 KHz	30 KHz	50 KHz	75 KHz	100 KHz	150 KHz	300 KHz	500 MHz	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz		
		AC	DC	AC	DC		DC	AC		DC	AC	AC	DC															
SILVER	15	---	80	---	50	0.005	0.075	---	1.4	--	15	--	--	--	28	34	--	44	60	70	70	--	--	--				

PART MARKING:

9050F-100-0000
SCI DATE CODE

PACKAGE MARKING:


BUBBLE PACK:
9050F-100-0000
SCI DATE CODE
LOT NO.
QTY

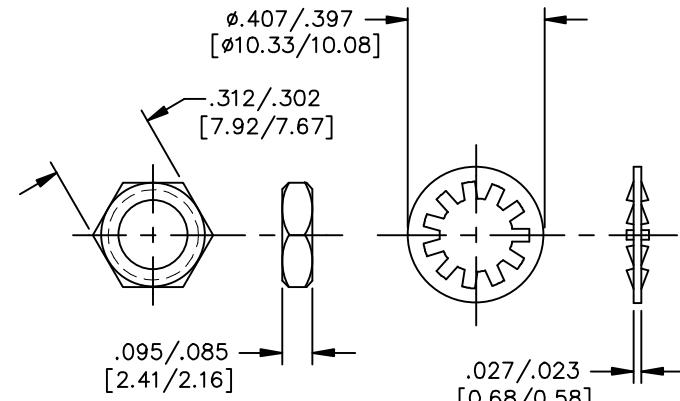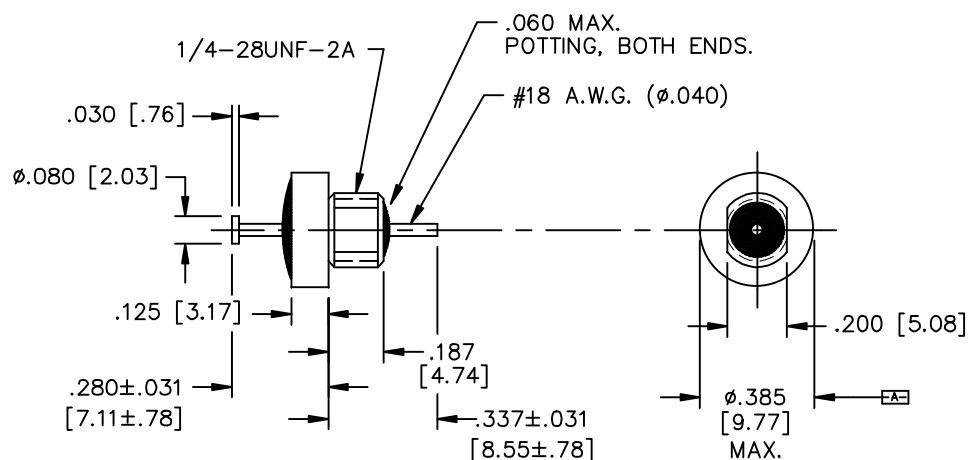

MARKING NOTES:

N/A

SCHEMATIC



MTG. HARDWARE

- 1) MOUNTING TORQUE NOT TO EXCEED 7in-lbs.
- 2) THIS IS A LEAD FREE PRODUCT.
- 3) MAX. REFLOW IS 245°C FOR 5 SECONDS.

Quality Products From The Specialists In Electro-Magnetic Compatibility

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[API Technologies:](#)

[9050F-100-0000](#)