

Sales Outline Drawing
Specifications:
cUL Recognized to IEC60601-1-8 3rd Edition Amendment 1

Sound Level Category:	Loud	Loud	Loud
Mode of Operation:	Low Priority Alarm 2 beeps repeating every 20 sec	Medium Priority Alarm 3 beeps repeating every 7.5 sec	High Priority Alarm 10 beeps repeating every 2.5 seconds
Loudness @ 10cm:	85 to 95 dB(A) Typ.	85 to 95 dB(A) Typ.	85 to 95 dB(A) Typ.
Frequency:		150 to 4000 Hz	
Connection:	Connect "+" to "+" & "-" to "-" of Power Supply	Connect "+" to "+" & "-" & Medium to "-" of Power Supply	Connect "+" to "+" & "-" & High to "-" of Power Supply
Voltage Rating:		5 ± 0.5 VDC	
Average Current Draw:	<45mA Typ.	<70mA Typ.	<150mA Typ.
Ipk Current*:		400mA	
Housing Material:		Valox (UL94V-0), Octagonal, Black	
Storage Temperature:		-30° to +60° C	
Operating Temperature:		-30° to +55° C	
Weight (Typical):		6.0g	
Options:	Please contact factory.		


Dimensions: Inches [mm]

cUL Recognized
ROHS Compliant

PATENT NUMBER: 7880593


Before Code Date: 1546

Not cUL Recoanized

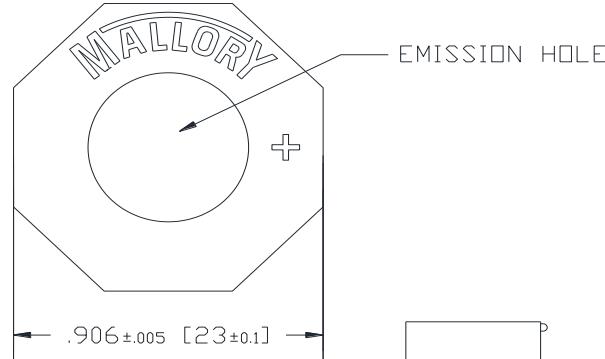

After Code Date: 1547

cUL Recoanized

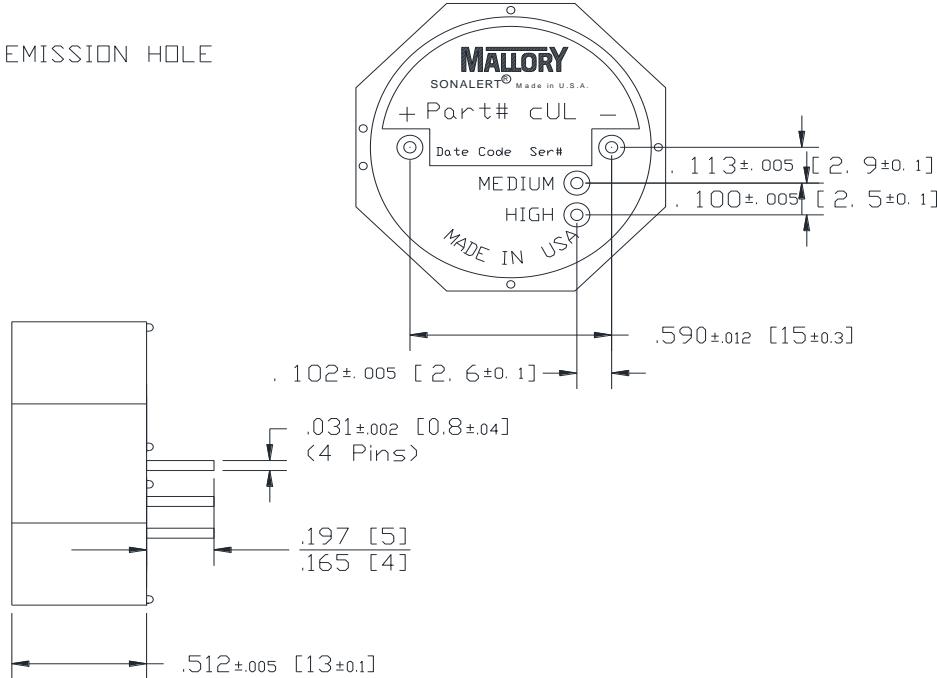

NOTE A:

TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS.

NOTE B:

MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER.
 UNITS ARE SUITABLE FOR WAVE SOLDERING. BOARDS ARE NOT SUITABLE FOR WASH.
 RECOMMENDED MAXIMUM TEMPERATURE AND TIME DURATION FOR WAVE SOLDERING IS
 +270°C AND 3 SECONDS RESPECTIVELY.

*Ipk = Instantaneous Peak