


1		2			3		4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					. .
									. .
									. .

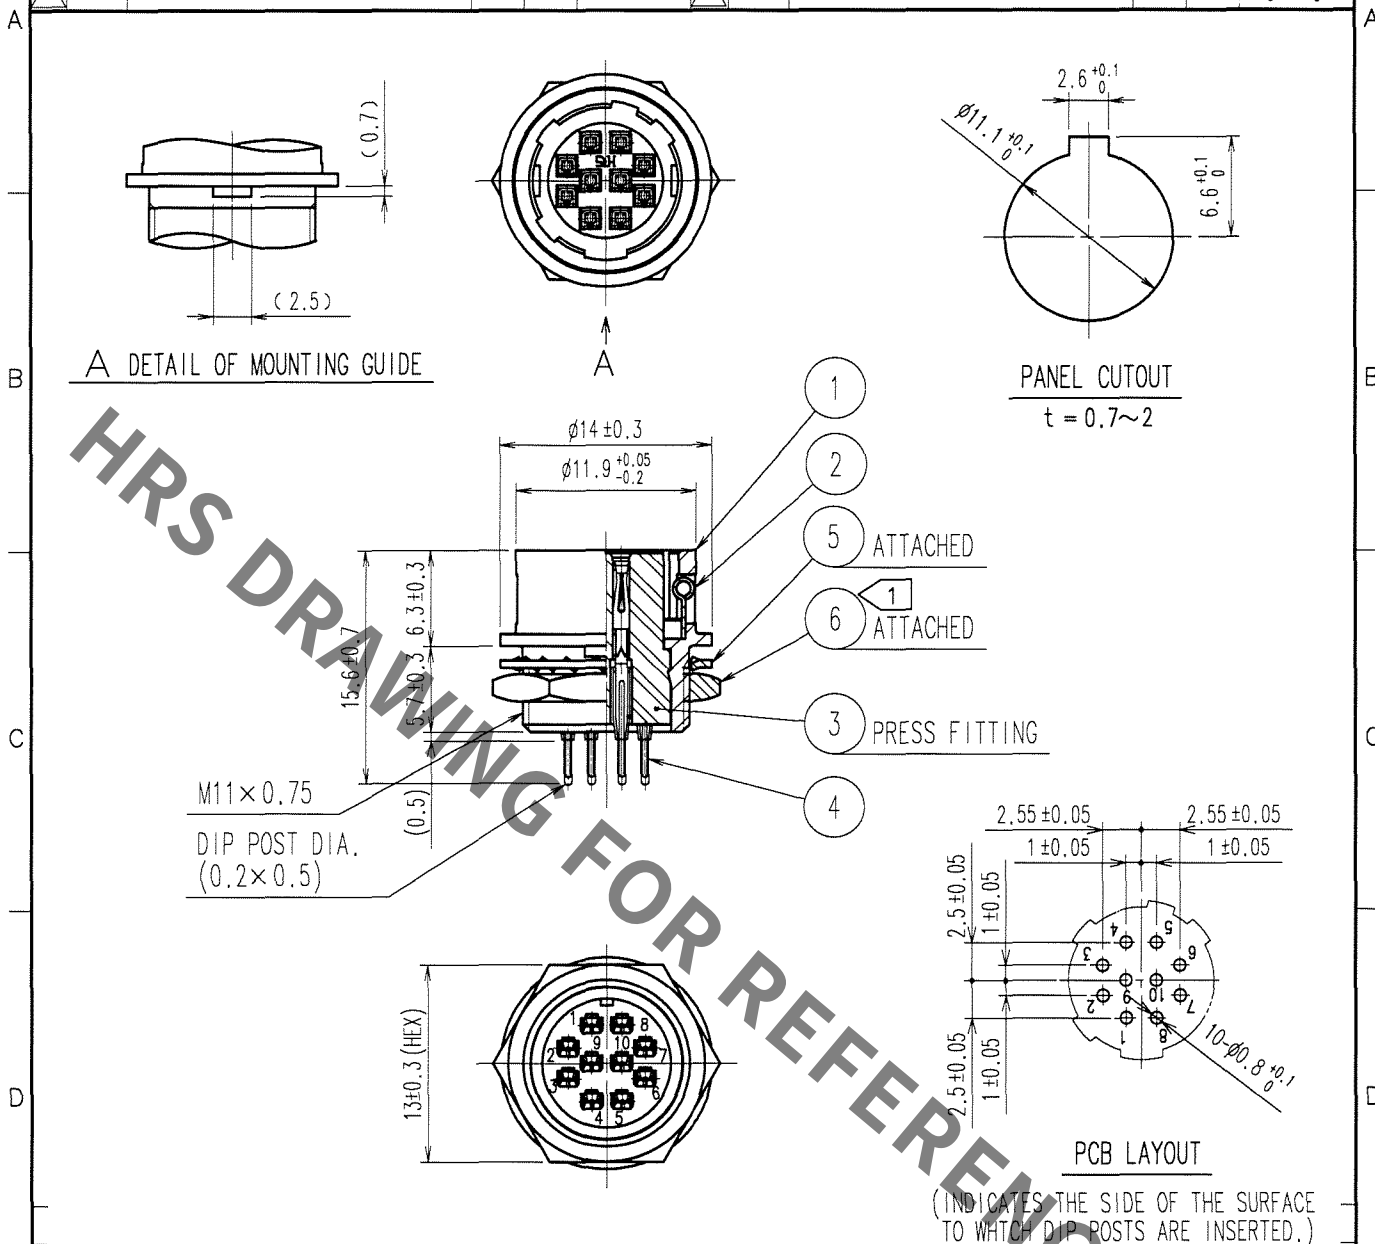

NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ TO BE 2 N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑥ FROM LOOSENING.

3	PBT	(BLACK) UL94V-0	6	BRASS ①	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	PHOSPHOR BRONZE	GOLD PLATING 0.2µm min. NICKEL UNDER PLATING 2µm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)

CL

DRAWN

DESIGNED

CHECKED

APPROVED

RELEASED

H.KISHI

H.KISHI

E.KUNII

M.SATO


'05 08 31

'05 08 31

'05 09 02

'05 09 02

F



DRAWING NO.

PART NO.

SCALE
2 : 1

EDC4-022531-72

HR10A-10R-10SB(72)

UNITS
mm

HRS

HIROSE ELECTRIC CO., LTD.

CODE NO.

CL110-0413-6-72

1
1