

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Contact(metal housing): Copper Alloy with Ni plated
Terminal screw: Steel galvanized with Cr3+ plated
Wire guard: Copper Alloy, Tin plated
Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC
Current rating: 16 Amps/way max
Contact resistance: 20mΩ(max)
Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
Wire range: 12-26AWG



Mechanical:

Torque: 5.0kgf.cm/M3
Operating Temperature: -40℃ to +105℃
Soldering reliability:
Test temperature= 250℃±10℃
5 seconds max

Ordering Information:

F75-6-E XX-X 0 0 X 0

2 02 5 Green
- - 6 Blue
24 24 8 Grey
A Black
1 " "- SCREW
2 " "-/+ SCREW

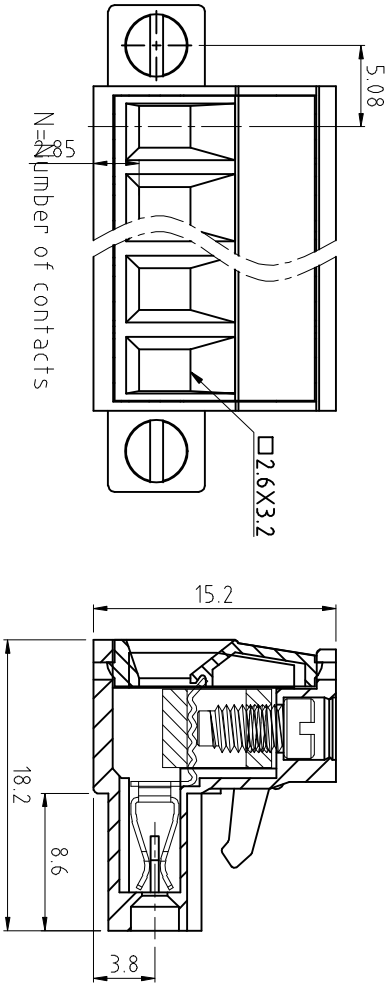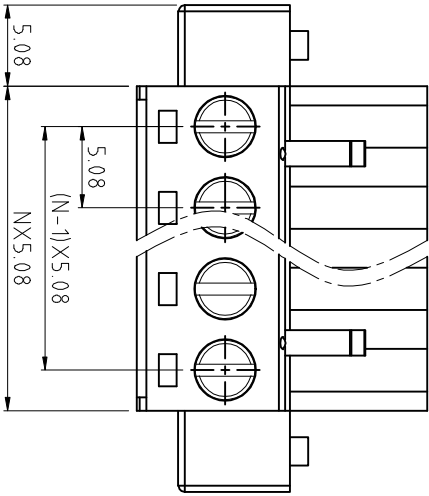

WELINK 恒翔電子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X: ±0.50	CHECKED:	F75-6 Pitch 5.08mm
X.X: ±0.30	DRAWN: Yang Ming	Series
X.XX ±0.20	2011.09.26	
X° ±1°	UNITS: mm	REV: A
	SCALE: 3 / 1	PAGE: 1 / 1
		DWG NO: 9F756E001A