
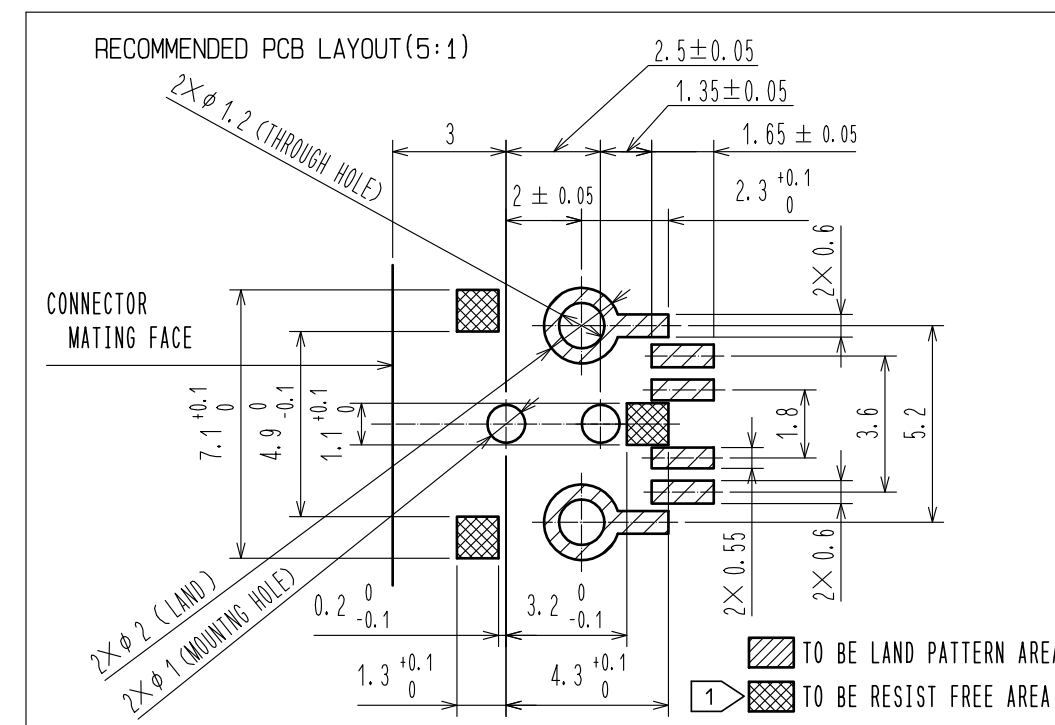
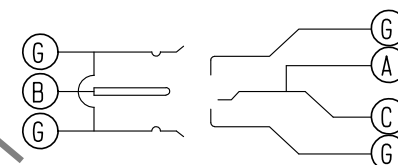






- STATE OF CONTACT NONMATED
-
- (N.C:NORMAL CLOSE)

STATE OF CONTACT MATED
(N.O.:NORMAL OPEN)

4. THIS PRODUCT IS IMPOSSIBLE TO WASH.
5. USE 0.15mm THICK METAL MASK.
6 LOT NO. IS MARKED ON THE SPECIFIED SURFACE.
7 FIX THE CONNECTOR WITH DEVICE CHASSIS AT THE AREA WITHIN 2mm FROM THE OPENING

SPECIFIED REFLOW TEMPERATURE PROFILE
FOR LEAD-FREE SOLDER

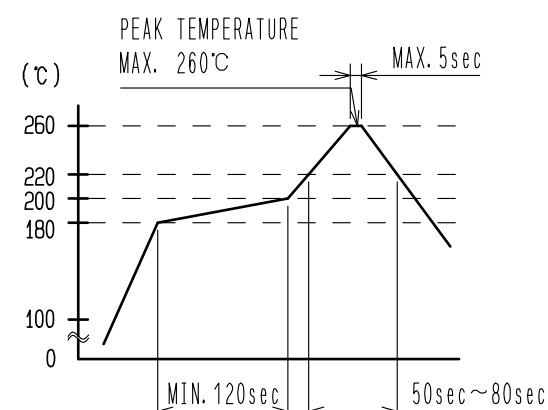

RoHS COMPLIANT


HALOGEN FREE COMPLIANT

3	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING	7	PET	
2	STAINLESS STEEL	SELECTIVE GOLD PLATING	6	PS	
1	PA-M		5	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING
			4	BERYLLIUM COPPER	SELECTIVE GOLD PLATING
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED : KH. IKEDA 15.08.03 CHECKED : NK. NINOMIYA 15.08.03 DESIGNED : RO. FURUYAMA 15.08.03 DRAWN : RO. FURUYAMA 15.08.03	DRAWING NO. EDC-353753-01-01 PART NO. MS-151NB-1(01) CODE NO. CL358-0345-4-01		

 1/

Dec.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

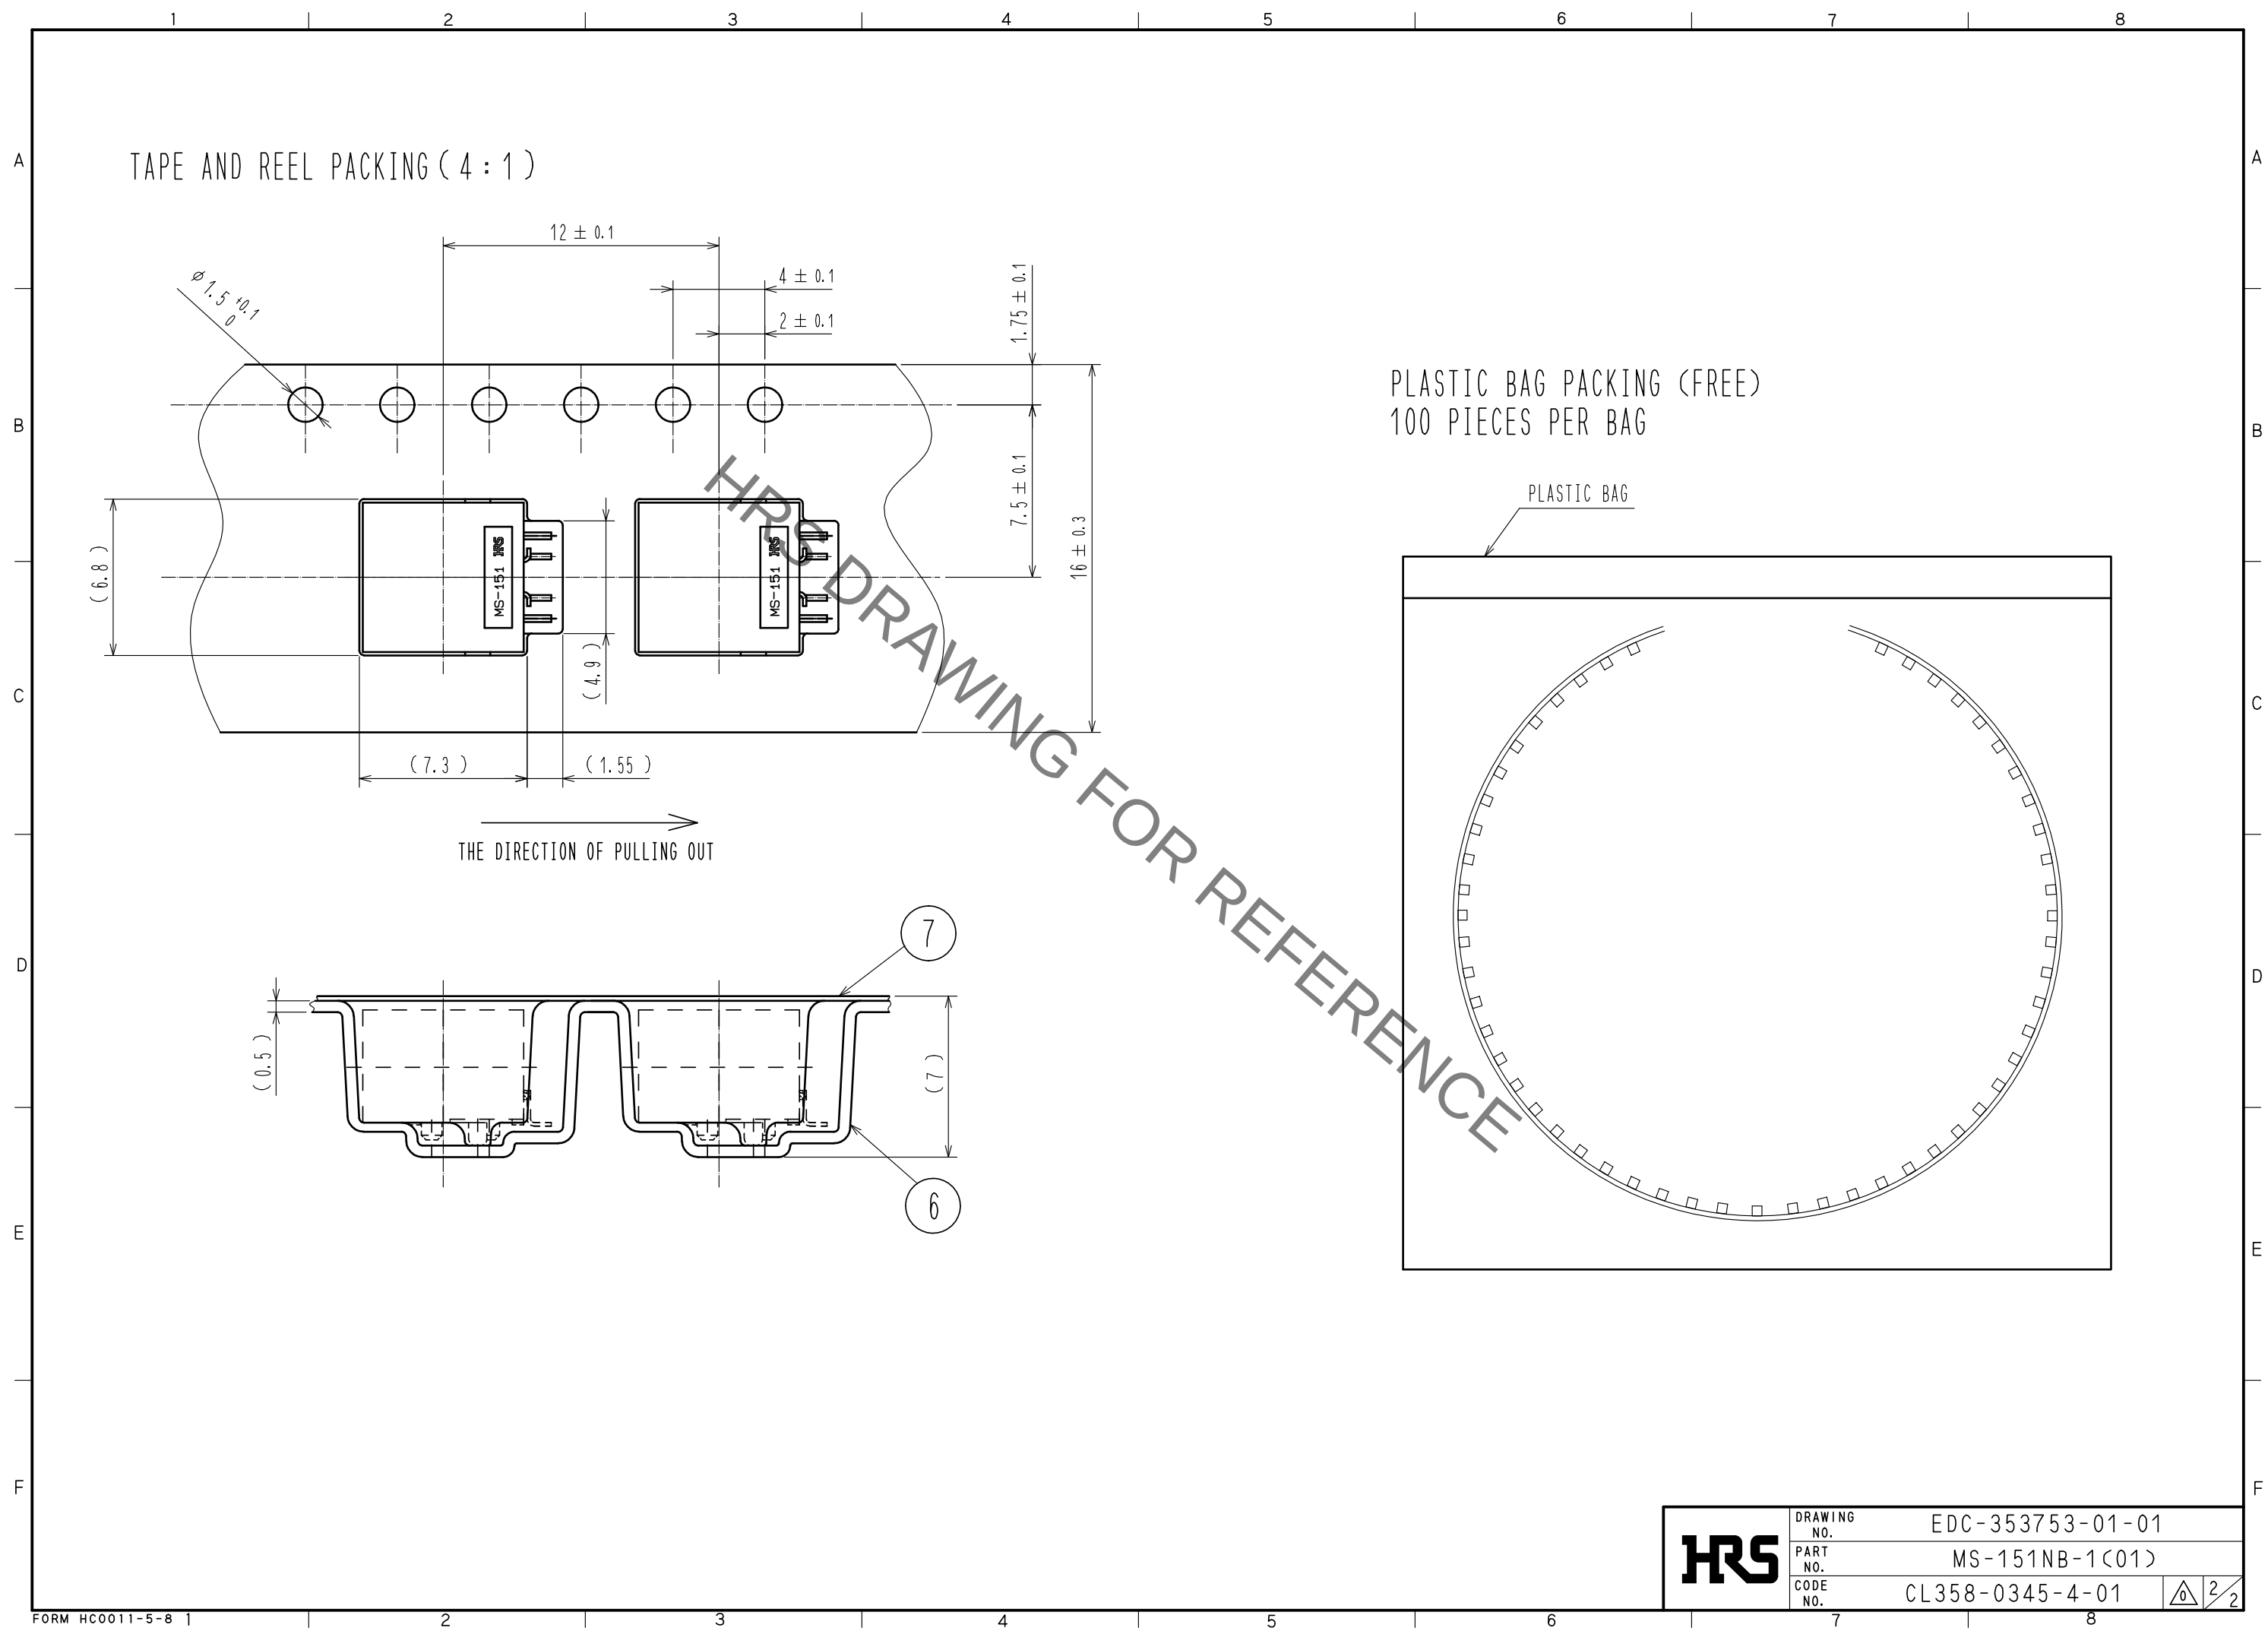

HRS	DRAWING NO.	EDC-353753-01-01	2 2
	PART NO.	MS-151NB-1C01	
	CODE NO.	CL358-0345-4-01	