
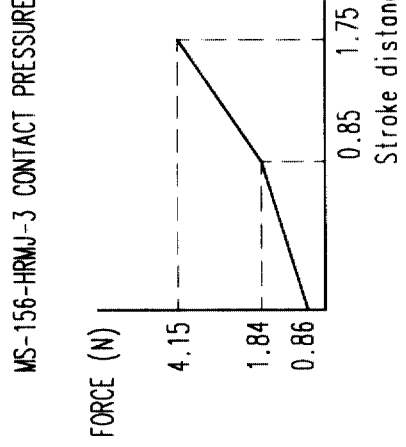
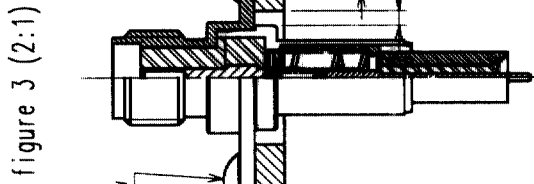
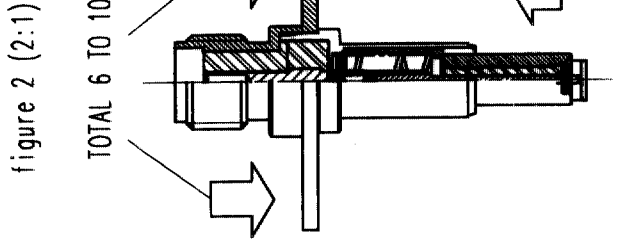
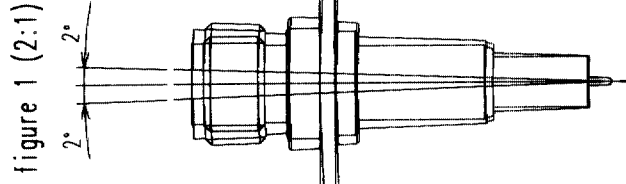
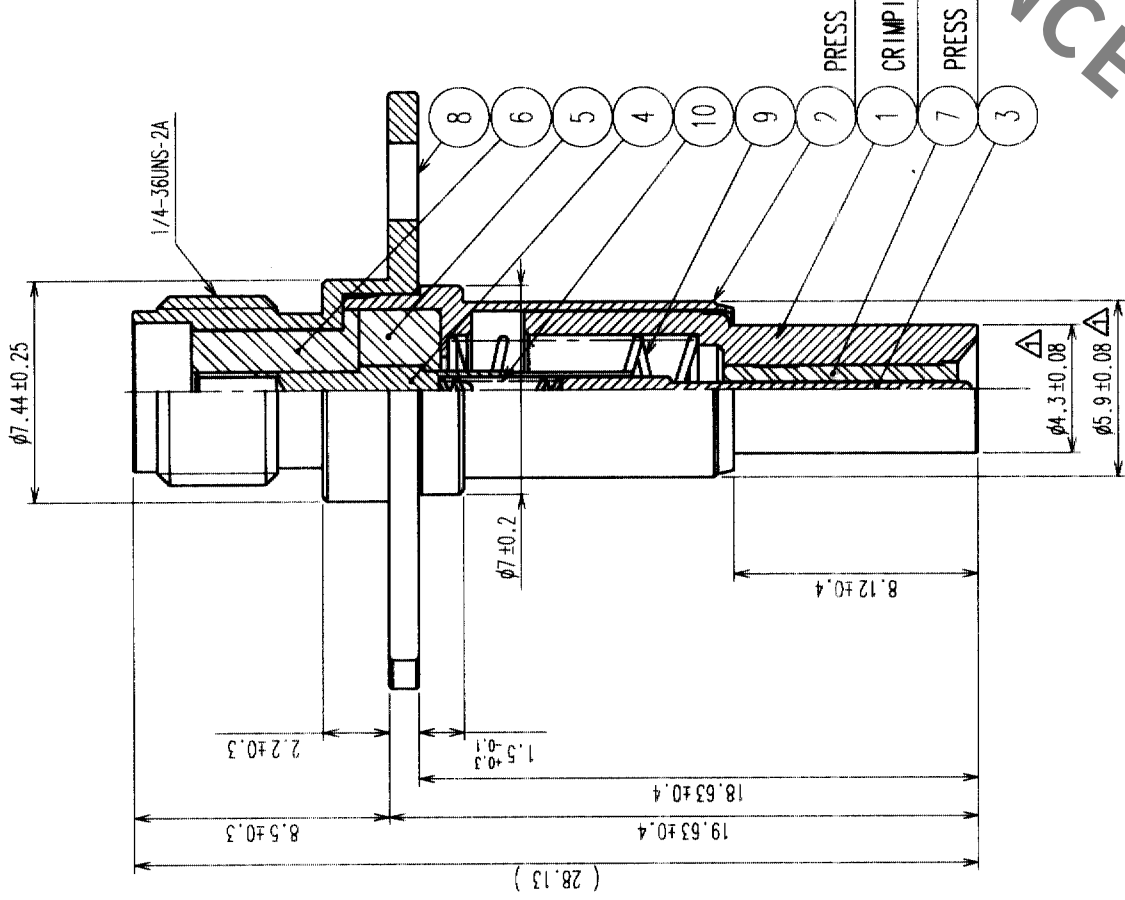


COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE
A	2	RE-J-01958		K.HIDA	K.K.	22.11.25						

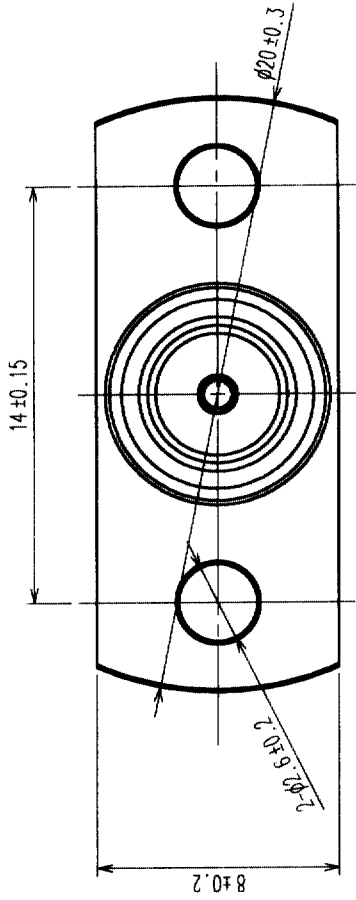

MATED CONDITION

5	PTFE		10	STAINLESS	GOLD
4	BERYLLIUM COPPER	GOLD	9	STAINLESS	
3	BERYLLIUM COPPER	GOLD	8	STAINLESS	PASSIVATE
2	BERYLLIUM COPPER	GOLD	7	PTFE	
1	BERYLLIUM COPPER	GOLD	6	PTFE	

CODE NO. (OLD)		FINISH, REMARKS		FINISH, REMARKS	
		DRAWN	DESIGNED	CHECKED	APPROVED
		K.HIDA	K.HIDA	K.KAWAMURA	Y.MIYAKE
			'02.11.1	'02.11.1	'02.11.5

DRAWING NO.		PART NO.		MS-156-HRMJ-6	
EDC3-180317					
SCALE		CODE NO.		CL358-0181-9	
4 : 1					
UNITS					
mm					

NOTE 1.This adaptor must be pushed on the receptacle(MS-156) with 6 to 10N.(refer to figure 2)
2.Mating angle must be less than ±2 degree.(refer to figure 1)
3.This product should not be fixed completely so that it keep space to align for connection
If your jig have alignment structure,it is not needed.
4.Recommended setting configuration is shown in figure 3.

TO
RFD