

Transient Voltage Suppressors for ESD Protection

ESD3.3V88D-LC

Description


The ESD3.3V88D-LC is low capacitance TVS arrays designed to protect high speed data interfaces. This series has been specifically designed to protect sensitive components which are connected to high-speed data and transmission lines from over-voltage caused by ESD (electrostatic discharge), CDE (Cable Discharge Events), and EFT (electrical fast transients).



Feature

- ◆ 182 Watts Peak Pulse Power per Line (tp=8/20µs)
- ◆ Protects One Bidirectional I/O Line
- ◆ Low clamping voltage
- ◆ Working voltages : 3.3V
- ◆ Low leakage current
- ◆ IEC61000-4-4 (EFT) 40A (5/50ns)
- ◆ IEC61000-4-5 (LIGHTING) 13A (8/20µs)
- ◆ IEC61000-4-2(ESD):±30kV (air discharge)
±30kV (contact discharge)

Functional Diagram

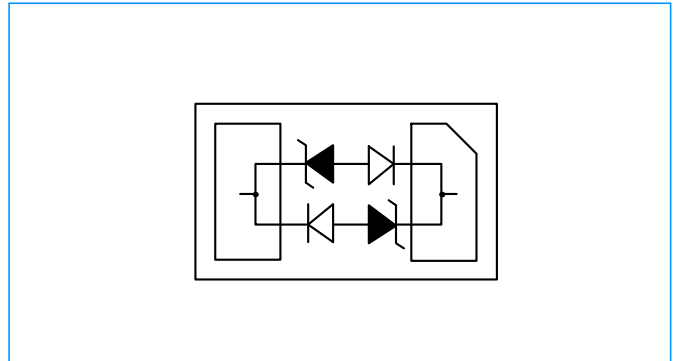

Applications

- ◆ 10/1000 Gigabit interface
- ◆ Cell Phone Handsets and Accessories
- ◆ Microprocessor based equipment
- ◆ Notebooks, Desktops, and Servers
- ◆ Portable Instrumentation
- ◆ Peripherals
- ◆ Pagers

Mechanical Data

- ◆ SOD-882/DFN1006 (1.0x0.6x0.5mm) Package
- ◆ Molding Compound Flammability Rating : UL 94V-O
- ◆ Weight 0.5 Milligrams (Approximate)
- ◆ Lead Finish : Lead Free

Mechanical Characteristics

Symbol	Parameter	Value	Units
P _{PP}	Peak Pulse Power (tp=8/20µs waveform)	182	Watts
T _L	Lead Soldering Temperature	260 (10 sec.)	°C
T _{STG}	Storage Temperature Range	-55 to +150	°C
T _J	Operating Junction Temperature Range	-40 to +125	°C

Transient Voltage Suppressors for ESD Protection

ESD3.3V88D-LC

Electrical Characteristics (@ 25°C Unless Otherwise Specified)

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Reverse Working Voltage	V_{RWM}	--	--	--	3.3	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$;	4.0	--	--	V
Reverse Leakage Current	I_R	$V_{RWM}=3.3V, T=25^{\circ}C$;	--	--	1.0	μA
Positive Clamping Voltage	V_C	$I_{PP}=1A, T_P=8/20\mu s$;	--	--	8.5	V
		$I_{PP}=13A, T_P=8/20\mu s$;	--	--	14	V
Junction capacitance	C_J	$V_R=0V, f=1MHz$;	--	1.2	--	pF

Characteristic Curves

Fig1. 8/20 μs Pulse Waveform


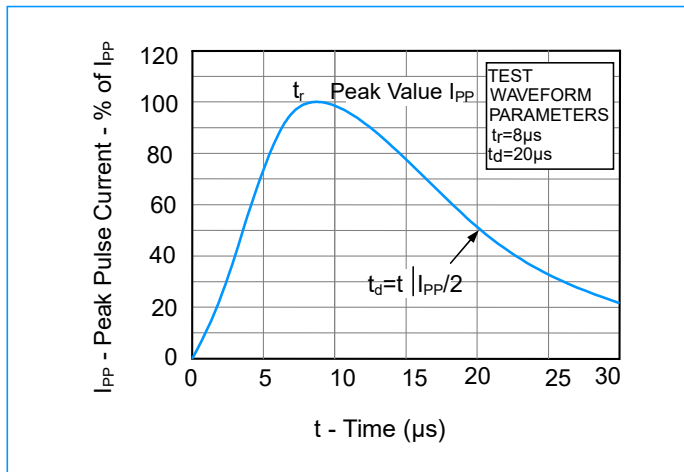


Fig2. Power Derating Curve

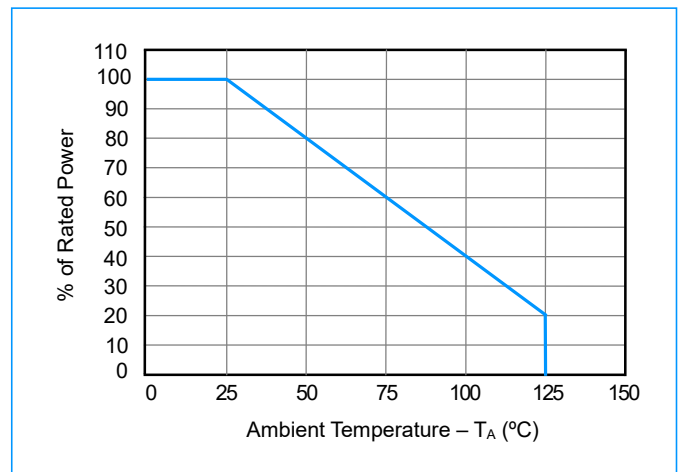

Transient Voltage Suppressors for ESD Protection

ESD3.3V88D-LC

Characteristic Curves

Fig3. ESD Pulse Waveform (according to IEC 61000-4-2)

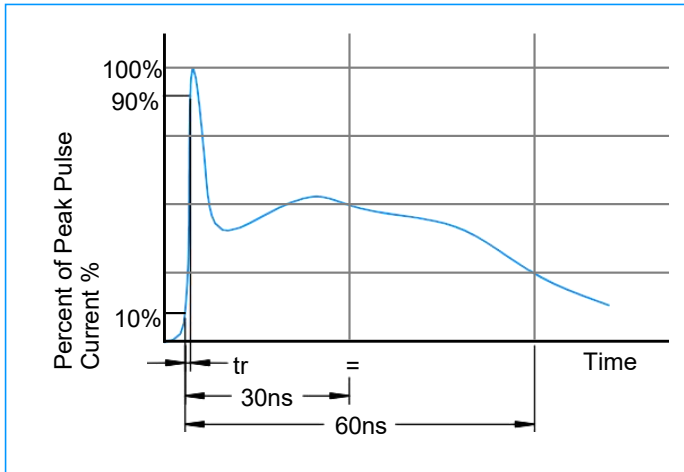


Fig4. Typic Reverse Leakage vs. Temperature

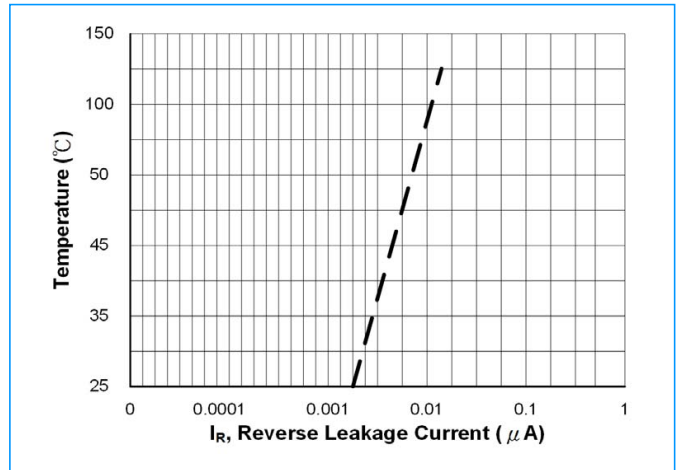


Fig5. Typic Capacitance vs. Reverse Voltage


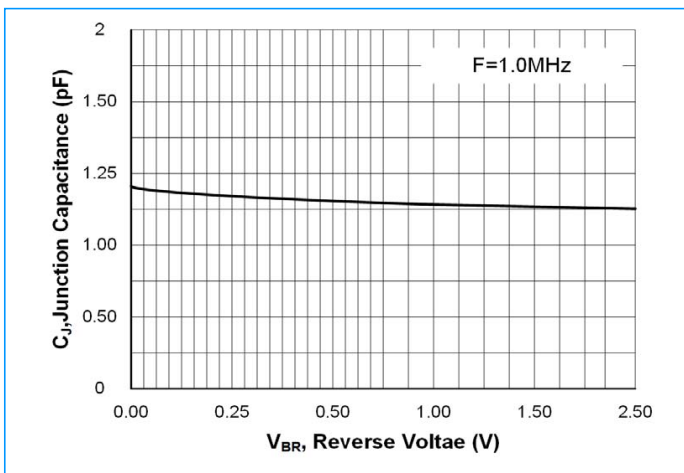


Fig6. Typic Breakdown Voltage vs. Temperature

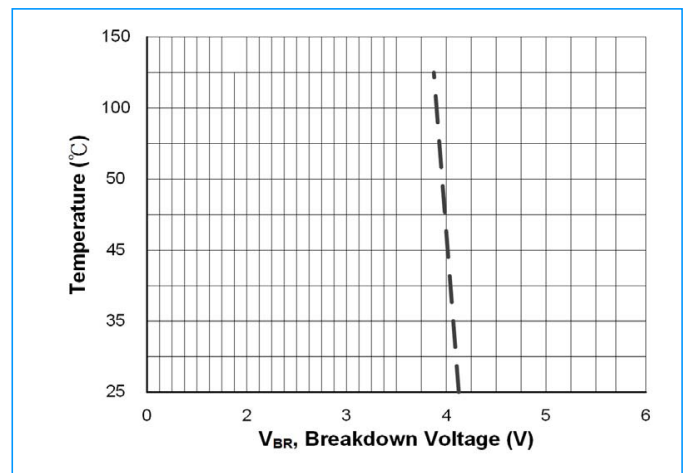


Transient Voltage Suppressors for ESD Protection


ESD3.3V88D-LC

SOD-882/DFN1006 Package Outline & Dimensions

SOD-882/DFN1006

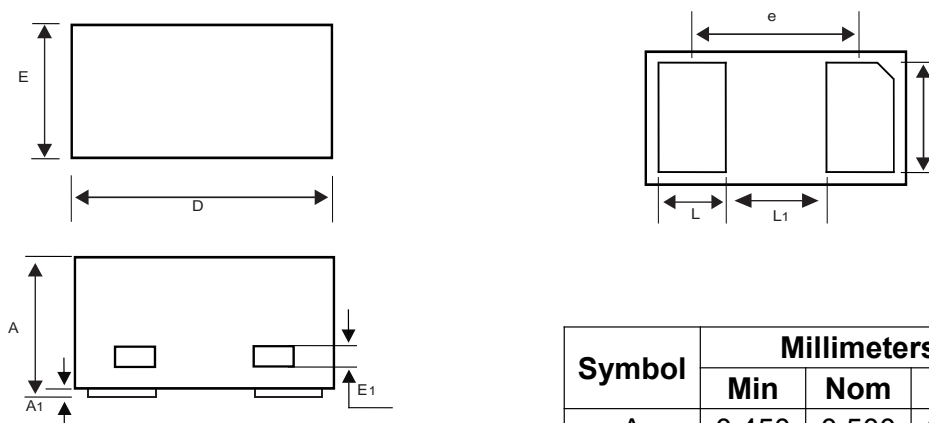

Suggested PAD Layout

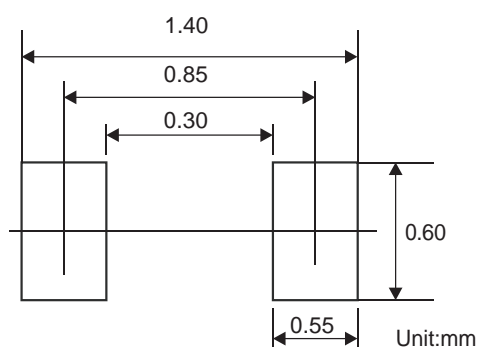

Symbol	Millimeters		
	Min	Nom	Max
A	0.450	0.500	0.550
A1	0	0.020	0.050
E1	0.013	0.063	0.113
D	0.900	1.000	1.100
E	0.500	0.600	0.700
e	0.65BSC		
L	0.150	0.250	0.350
b	0.400	0.500	0.600
L1	0.300	0.400	0.500

Ordering Information

Device	Marking	Package	Quantity	Reel Size
ESD3.3V88D-LC	LL	SOD-882/DFN1006	10,000pcs/Reel	7 inch