
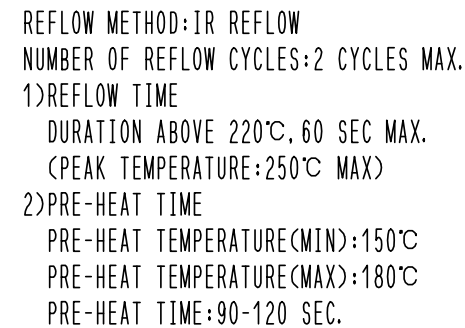


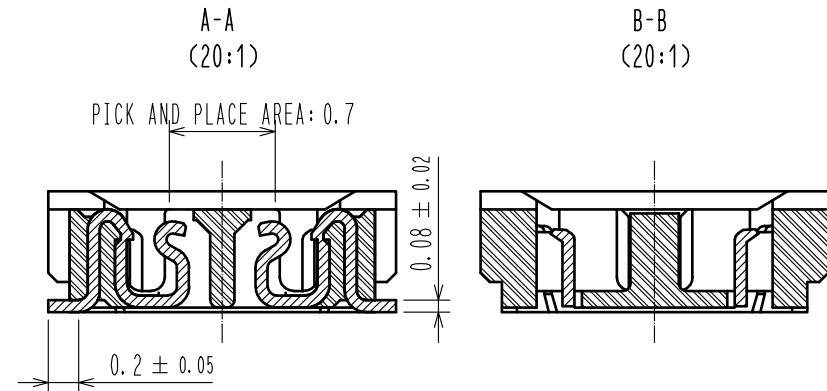

NOTE 1 . ALL LEAD CO-PLANARITY SHALL BE 0.08mm MAX.

2 ➤ CONTACT PLATING SPECIFICATIONS

CONTACT AREA : GOLD 0.05 μ m MIN



SMT LEAD : GOLD 0.05 μ m MIN

UNDER PLATING : NICKEL 1 μ m MIN

(SURFACE : SEALING)


3 ➤ A PART OF THE WALL COULD BE NOTCHED.

4 ➤ HRS MARK AND CAV No. ARE INDICATED IN APPROX. POSITION SHOWN.

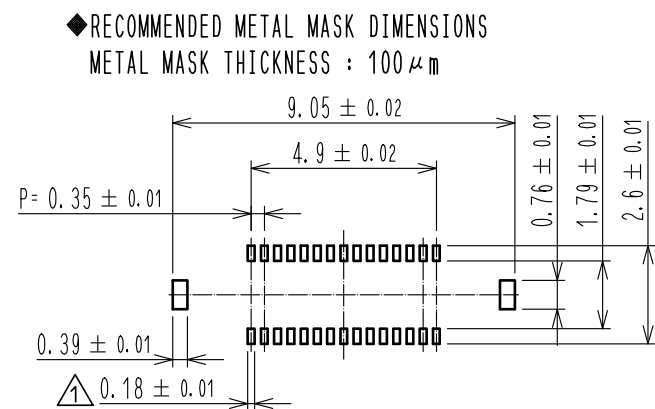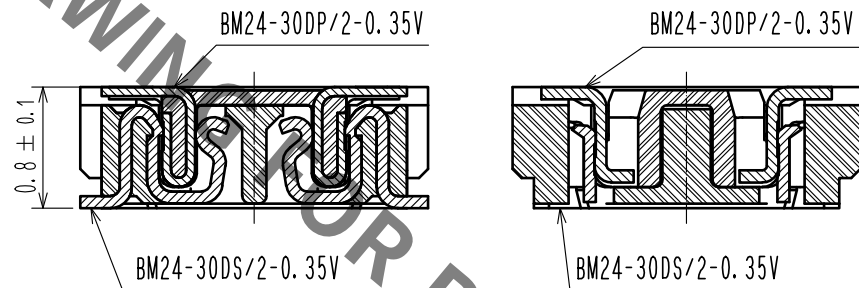


HRS HIROSE
ELECTRIC
CO., LTD.



EMBOSSED CARRIER TAPE PACKAGING (FREE)

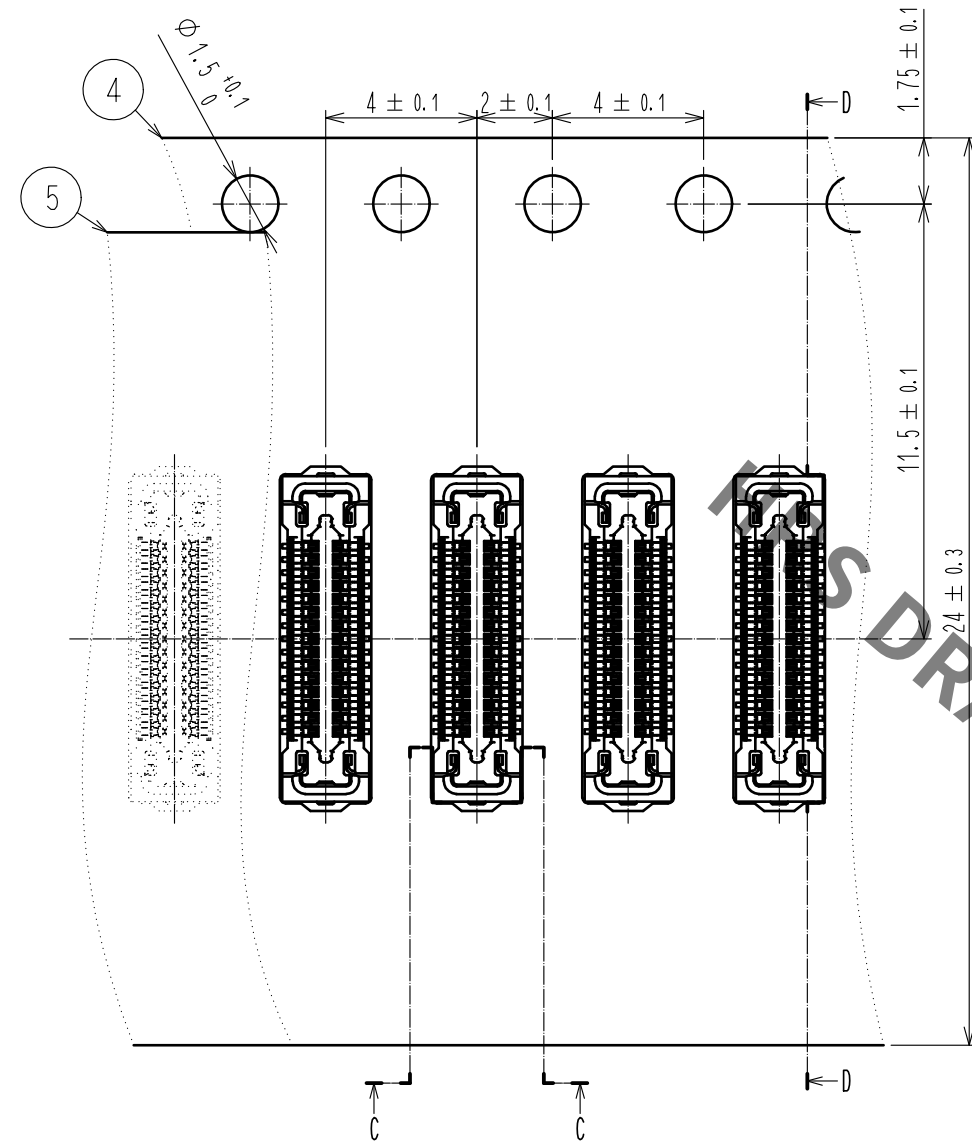

C-C (5:1)



DIRECTION OF UNREELING

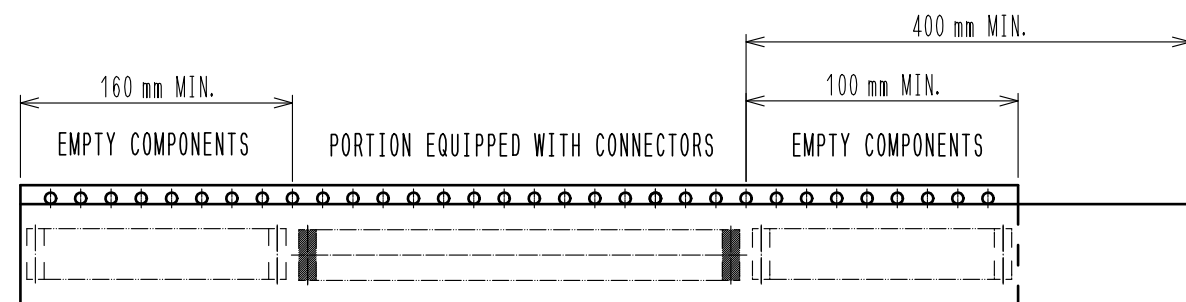


TRAILER


9 TAPING (FREE)

LEADER

D-D (5:1)

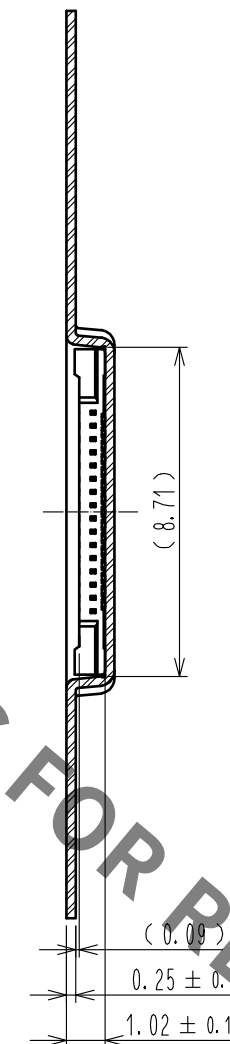

STYLE AND DIMENTION OF REEL (FREE)

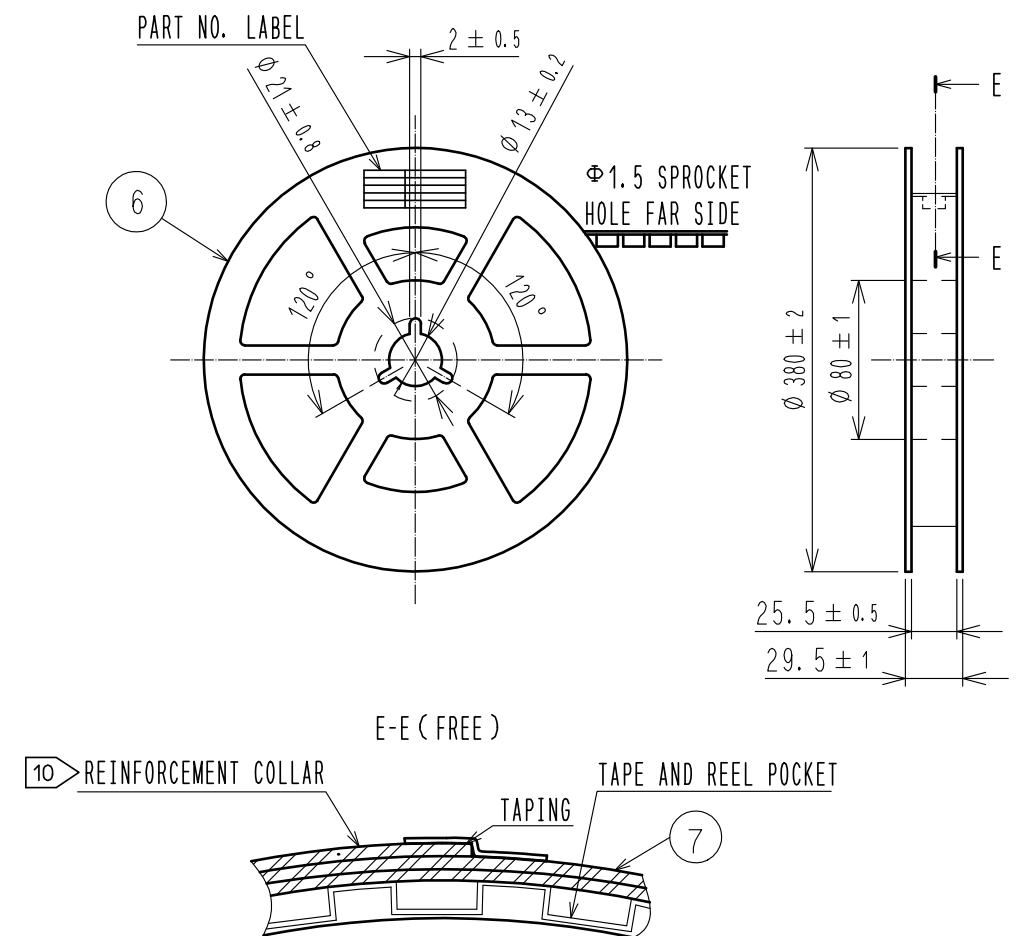

E-E (FREE)

10 REINFORCEMENT COLLAR

TAPING

TAPE AND REEL POCKET

DETAIL OF PART NO. LABEL

製造年月日	** ** *
製品コード	CL0677-2008-8(51)
製品名	BM24-30DS/2-0.35V(51)
数量	10,000
納入者	ヒロセ電機(株)

DATA OF MANUFACTURED
CODE NO.
PART NO.
QUANTITY
SUPPLIER

7 . PER REEL 10,000 CONNECTORS.

8 . THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

9 . REFER TO JIS C 0806(PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)

10 . AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET. AND TAPE DOWN AT THE END THE COLLAR.

HR

DRAWING NO.	EDC3-356936-02
PART NO.	BM24-30DS/2-0.35V(51)
CODE NO.	CL677-2008-8-51

1/2