
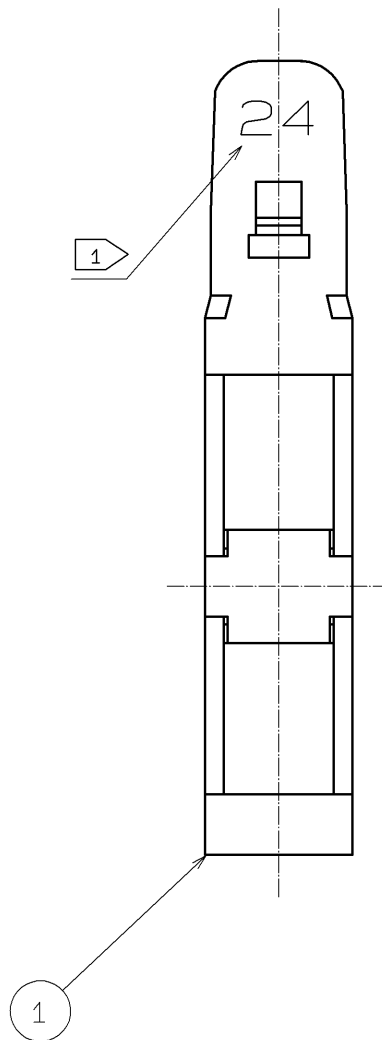
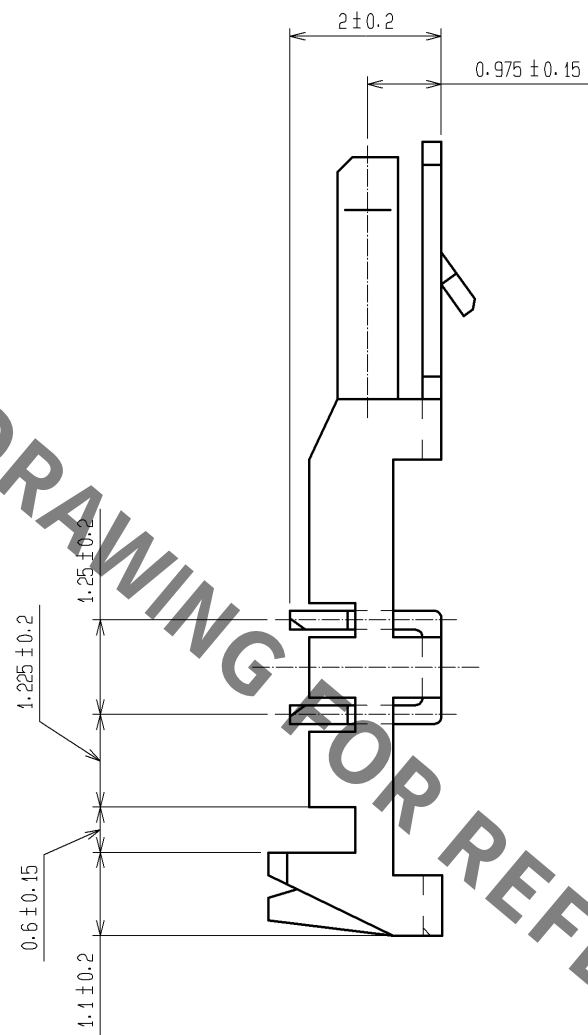



Dec.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

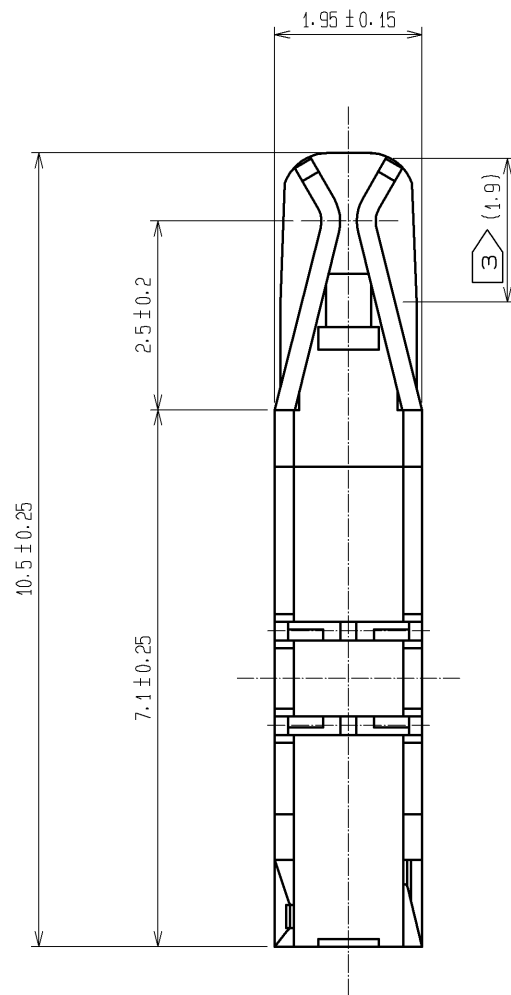

HRS DRAWING FOR REFERENCE

HRS No.	PART NO.	1 STAMPED CHARACTER	2 APPLICABLE CABLE
CL541-0266-4-06	DF1B-R28A(06)	28	UL1007 AWG28

- NOTES
- 1 INDICATE APPLICABLE CABLE AWG No.
 - 2 JACKET DIAMETER $\phi 0.9$ to $\phi 1.39$.
 - 3 RANGE OF GOLD PLATED.
 - 4. 1PACK:100 CONNECTORS.

				1	PHOSPHOR BRONZE	CONTACT AREA:GOLD PLATED 0.2#m min OTHER AREA:TIN PLATED 2.0#m min UNDER PLATING:NICKEL PLATED 1.0#m min			
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.			APPROVED :KI. AKIYAMA		12.10.22	DRAWING NO.		EDC3-020660-01	
			CHECKED :HK. UMEHARA		12.10.22	PART NO.		DF1B-R28A(06)	
			DESIGNED :KY. SHIMAKURA		12.10.22	CODE NO.		CL541-0266-4-06	
			DRAWN :MI. SAKIMURA		12.10.19			 1/1	