


间距: 3.5/3.81mm; 极数: 2x (2P-

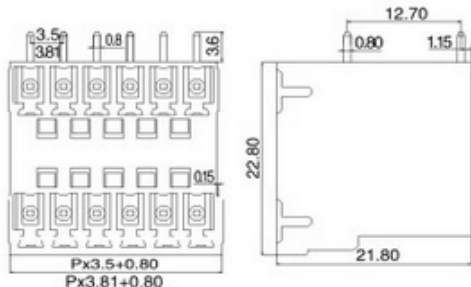

间距: 3.5/3.81mm  
极数: 2x (2P-24P)  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

#### 电气性能

额定电压: 300V  
额定电流: 8A  
耐电压: AC2000V/1Min

#### 机械性能

温度范围: -40°C~+105°C  
瞬时温度: +250°C5秒

#### MATERIAL

Pitch: 3.5/3.81mm  
Poles: 2x (2P-24P)  
Pin header: Brass、Tin plated  
Housing: PA66. UL94V-0

#### ELECTRICAL

Rated voltage: 300V  
Rated current: 8A  
Withstanding voltage: AC2000V/1Min

#### MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: +250°C for 5 sec.