



RoHS

MAPX

MODIFICATION

DRW





DATE

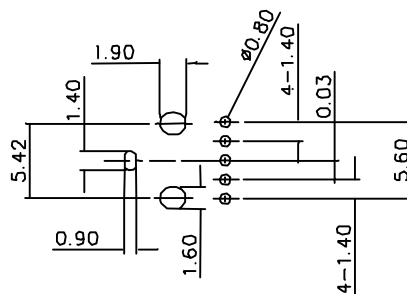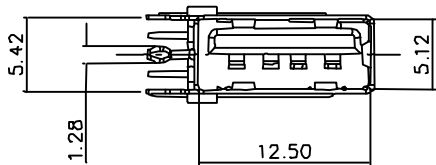

RECOMMENDED PCB LAYOUT

NOTE

- 1.MATERIAL
  - HOUSING: THERMOPLASTIC
  - SHELL: SPCC OR COPPER ALLOY
  - CONTACT: COPPER ALLOY
- 2.ELECTRICAL PERFORMANCE:
  - 2.1 CURRENT: 2A MIN
  - 2.2 CONTACT RESISTANCE: 30mOHMS MAX.
  - 2.3 DIELECTRIC STRENGTH
    - UNMATED: 500V AC RMS
  - 2.4 INSULATION RESISTANCE: 100MOHMS MIN
- 3.MECHANICAL PERFORMANCE:
  - 3.1 INSERTION FORCE: 35N MAX.
  - 3.2 WITHDRAWAL FORCE: 4N MIN  
35N MAX.
  - 3.3 TEMPERATURE RANGE: -25°C TO 85°C

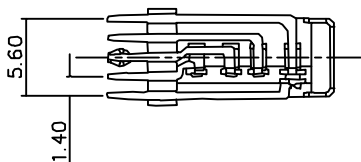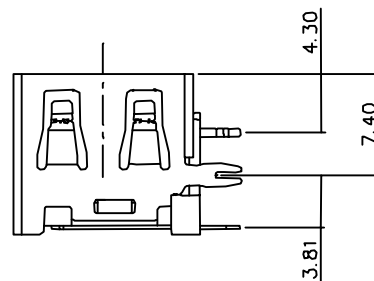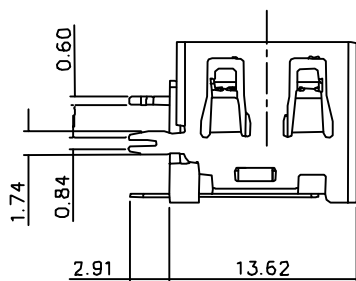

产品图

PRODUCT CHART DWG

公差一览表  
TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5°
.X	±0.20	.X	±2°
.XX	±0.15	.XX	±1°
.XXX	±0.05	.XXX	±0.5°

深圳市精拓金电子有限公司  
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	906-862A3119D102WD
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF11.8侧插外鱼叉内O型脚无边铜壳PART橙胶5PIN
日期 DATE	2021-04-12	核准 APPD	黄国荣	角法 VIEW	版本 VER
					AO