
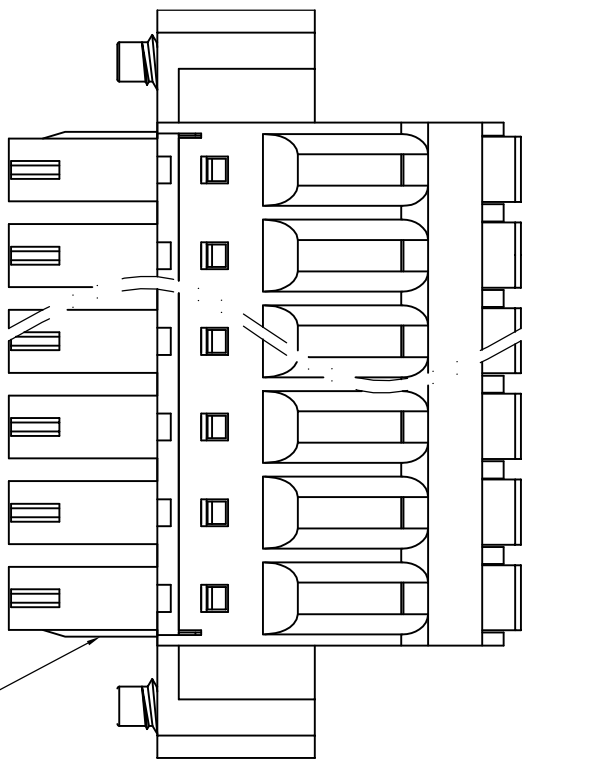


SIGN	DESCRIPTION	DATE	APPROVER

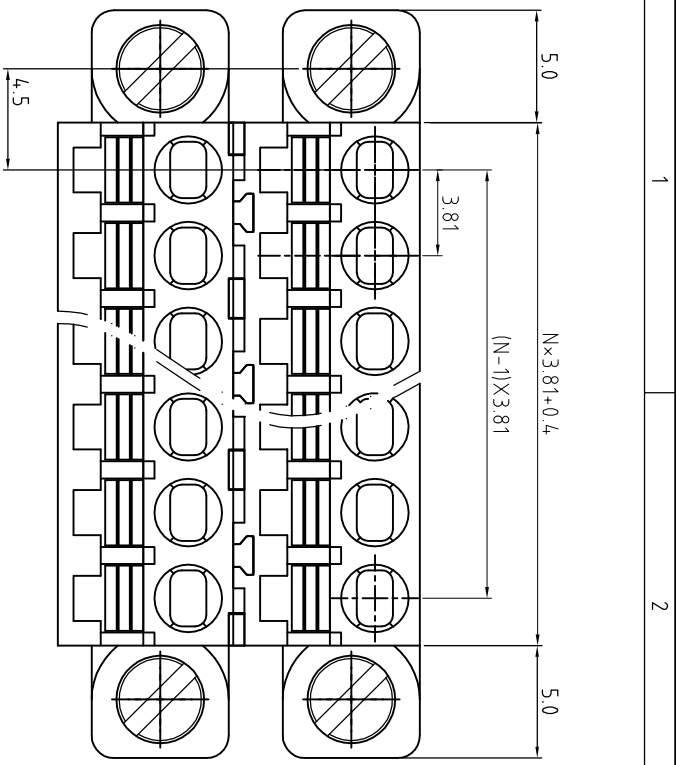

N=Number of contacts
2p to 6p with wedge, above 7p without wedge(including 7p)

Technical Data:
Material:
 Terminal: Copper Alloy with Tin plated
 Spring Clamp: Stainless steel
 Insulator body(housing): Polyamide(UL94V-0)
Electrical
 Voltage rating: 300VAC
 Current rating: 12 Amps/way max
 Contact resistance: 20mΩ(max)
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
 Wire range: 16-24AWG

Mechanical:
 Operating temperature: -40°C to +105°C
 Soldering reliability:
 Test temperature= 250°C±10°C
 5 seconds max

Ordering Information:
 F73 - V - C XX - 0 0 1 X 0 0 0 0

- 2 02
- 24 24
- 5 Green
- 6 Blue
- 8 Grey
- A Black

WELINK 恒翔电子科技有限公司
 Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50		F73 - V - pitch3.81mm
XX ±0.30	CHECKED:	- series
XXX ±0.20	DRAWN: Ling Yu	
X° ±1°	UNITS: mm	
	REVISION: A	PART NO: F73VCXX001X0000
	SCALE: 4 / 1	DWG NO: 9F73VC001A
	PAGE: 1 / 1	