


The I2C slave address is 0x78.
If the customer ties D/C# (pin 15) to VCC,
the I2C slave address will be 0x7a

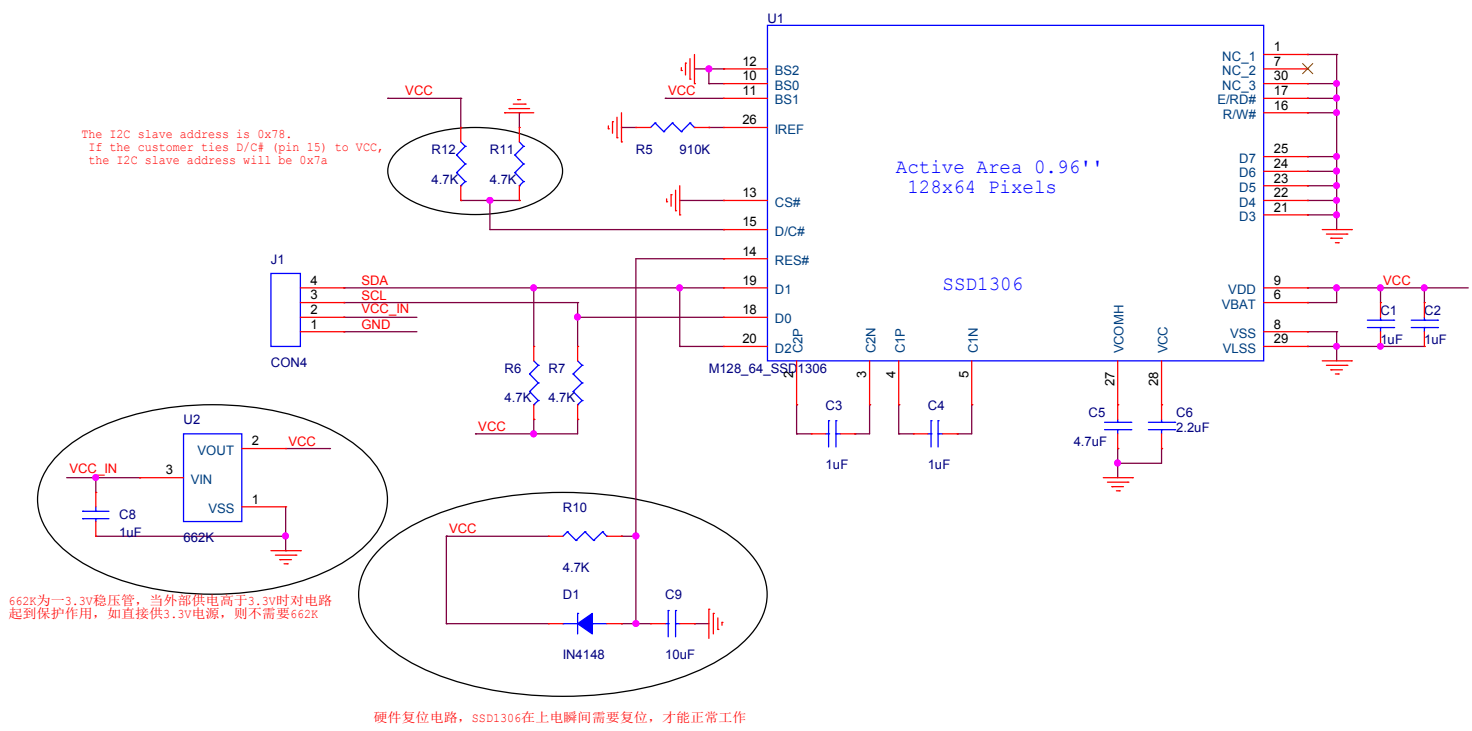

662K为-3.3V稳压管，当外部供电高于3.3V时对电路起到保护作用，如直接供3.3V电源，则不需要662K

硬件复位电路，SSD1306在上电瞬间需要复位，才能正常工作

Title		
0.96" 128*64单色OLED驱动板		
Size B	Document Number <Doc>	Rev V 1.0
Date:	Monday, January 18, 2016	Sheet 1 of 1