
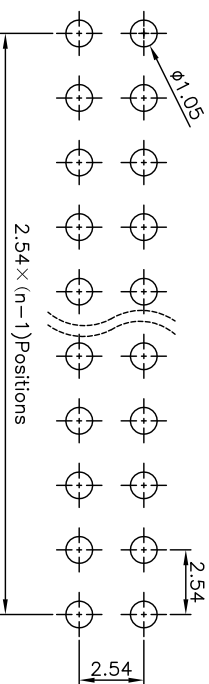
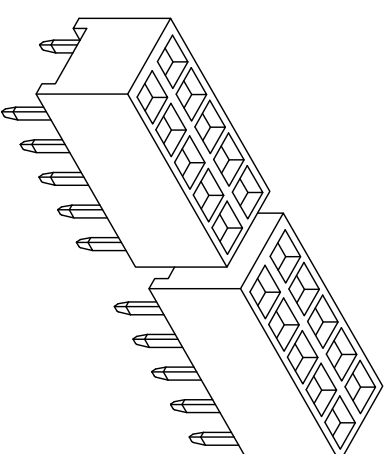
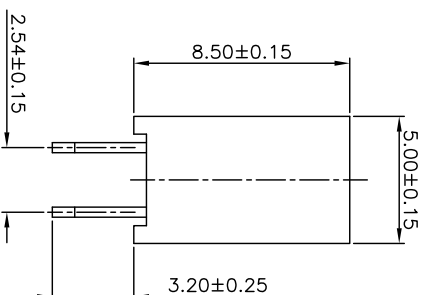


SPECIFICATIONS

Rated Current : 3.0AMP
 Contact Resistance : 20mΩ Max
 Withstand Voltage : 500V AC/DC
 Insulation Resistance : 1000MΩ Min
 Operation Temperature : -40°C to +108°C

Contact Material : Brass
 Contact Plating : Au or Sn Over Ni
 Insulator Material : Polyester(UL94V-0)
 Standard : PA6T
 Max Processing Temp : 230°C for 5-10 seconds

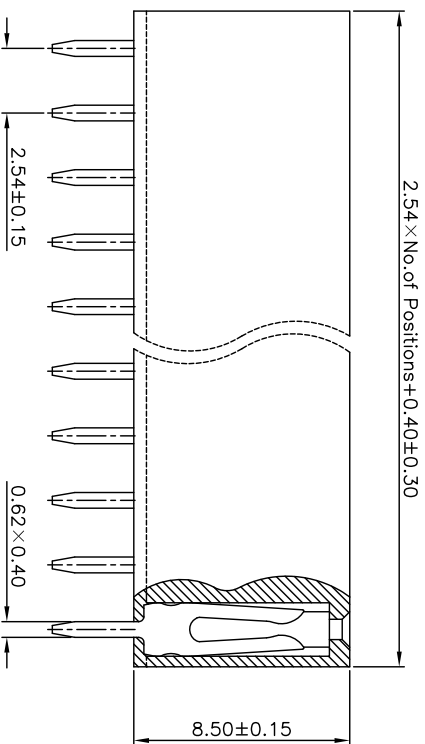

P.C.B LAYOUT

MODEL: F2.54-8.5×5.0-2×nP	DRAWN BY : Leiqin	DATE:
TITLE : 2.54间距8.5高直插排母	CHECKED BY : Liwei	DATE:
DRAWING NO:	REV. : A	APPROVED BY: Wuxin
SHEET: 1 OF 1	SCALE: 3:1	SIZE: A4 UNIT: mm

GENERAL TOLERANCE: (UNLESS SPECIFIED)		
X. ±0.30mm	X. ±	3'
X.X ±0.25mm	X.X ±	2'
X.XX ±0.20mm	X.XX ±	1'
X.XXX±0.10mm	X.XXX ±	0.5'

MEASURE POINT:

QUADRANT POINT	QIP
TANGENCY POINT	TIP
INTERSECTION POINT	IIP



深圳市吉威电子有限公司
 SZJUSTWELL ELECTRONICS CO., LTD

NO:	PARTICULAR	BY	DATE
-----	------------	----	------

REVISIONS	1	2	3	4	5	6	7	8
-----------	---	---	---	---	---	---	---	---