

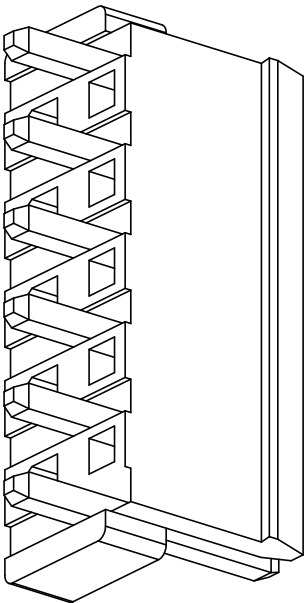
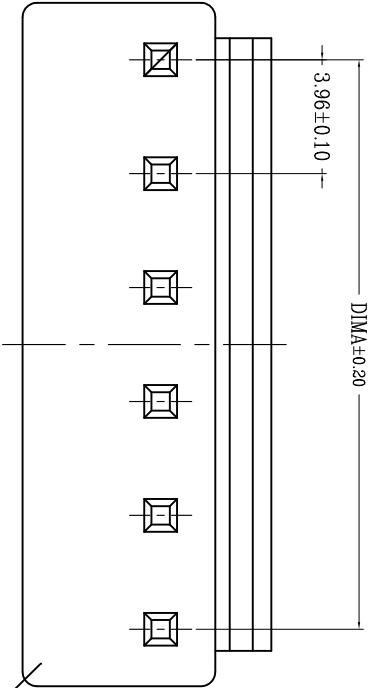


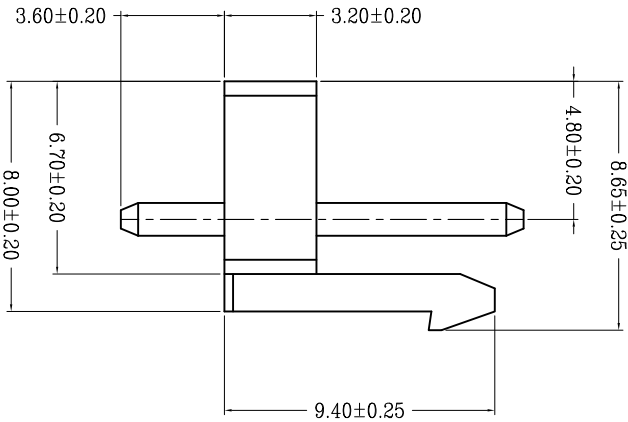


序号	品名	材质
①	VH3.96直针WIB胶芯	PA66 UL94V-0 米色 白色
②	VH3.96直针WIB端子	铜合金/表面镀锡

技术指标 (Technical Index) :

- 温度范围 (Temperature range) : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
- 额定电压 (Rated voltage) : 250V, AC, DC.
- 额定电流 (Rated current) : 7.0A AC, DC.
- 接触电阻 (Contact resistance) : $\leq 20\text{m}\Omega$.
- 耐压值 (Withstanding voltage) : 1500V AC/minute.
- 绝缘电阻 (Insulation resistance) : $\geq 1000\text{M}\Omega$.

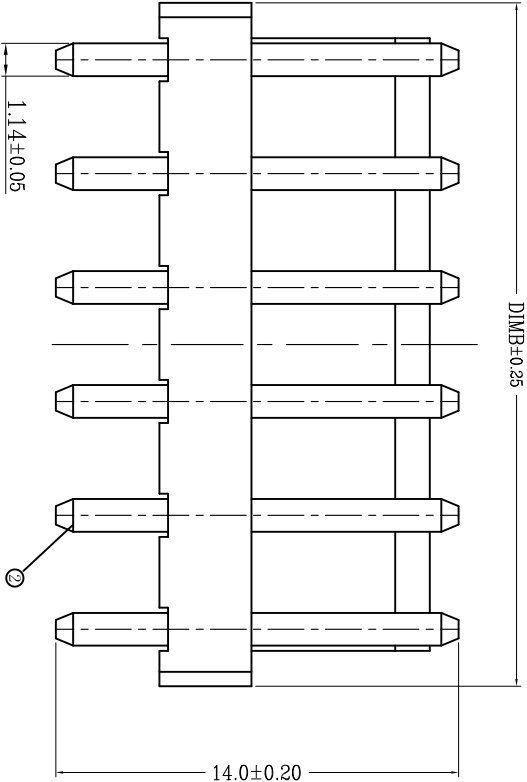

CKT	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36

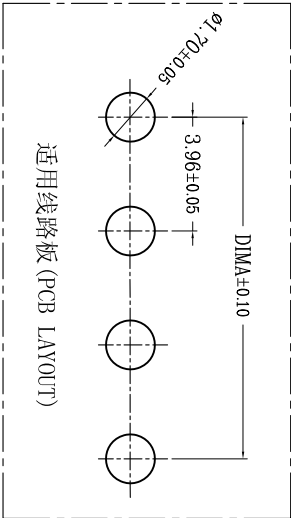

MODEL: PH-3.96VH-nP	DRAWN BY : Leiqin	DATE:
TITLE : VH3.96 直针	CHECKED BY : Liwei	DATE:
DRAWING NO:	REV. : A	APPROVED BY: Wuxin
SHEET: 1 OF 1	SCALE: 3:1	SIZE: A4 UNIT : mm

GENERAL TOLERANCE: (UNLESS SPECIFIED)		
X. ±0.30mm	X.* ±	3*
X.X ±0.25mm	X.X* ±	2*
X.XX ±0.20mm	X.XX* ±	1*
X.XXX±0.10mm	X.XXX ±	0.5*



深圳市吉威电子有限公司
SZJUSTWELL ELECTRONICS CO., LTD

MEASURE POINT:
QUADRANT POINT (QB)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)