



产品规格书

客户

产品名称

拨码开关

产品型号

KA-3

版本

B/01

客户确认

客户料号

确认签字			部门.
发布	审核	批准	
陈 DEC18 2015 宇航	陈 DEC18 2015 亮	陶 DEC18 2015 定云	



温州市万达电子有限公司

地址:浙江省温州瓯江口产业集聚区文博科技产业园

Tel: 0577-86291163 FAX:0577-86291242


Website:Http://www.wz-wd.com



技术参数

开关容量	1mA to 0.1A /28 VDC (resistive load)
接触电阻	300mΩ max.
绝缘电阻	10MΩ min. (At 250 VDC) between nonconnected terminals 100MΩ min (At 250 VDC) between each terminal and noncurrent-carrying part
耐压	250 VAC, 50/60Hz for 1 minute between nonconnected terminals 1,000 VAC, 50/60Hz for 1 minute between each terminal and noncurrent-carrying part
操作力	450g max.
振动测试	10 to 55Hz, 1.5mm double amplitude
冲击测试	490m/s² (approx. 50g's)
使用温度	Operating: -10 to +65° C;Storage: -20 to +80° C
耐湿性	45 to 85% RH max.
开关寿命	Mechanically: 30,000 operations (steps) min. Electrically: 20,000 operations (steps) min.
重量	Approx. 1.5g


外形尺寸

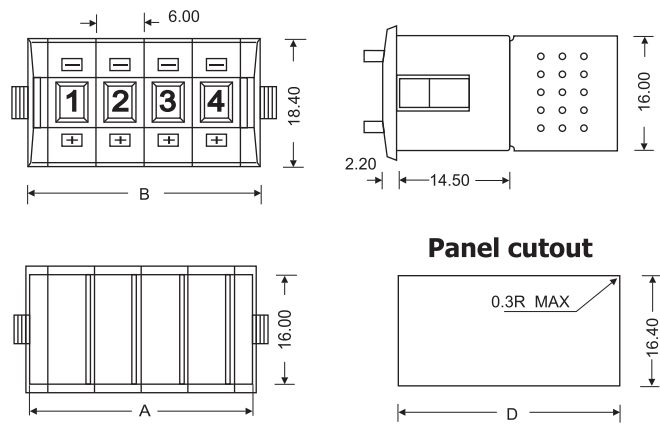


No. of units (N)	A (Nx6+6)	B (Nx6+8)	D
1	12	14	12.4
2	18	20	18.4
3	24	26	24.4
4	30	32	30.4
5	36±0.8	38±0.8	36.8
6	42±0.8	44±0.8	42.8
7	48±0.8	50±0.8	48.8
8	54±0.8	56±0.8	54.8
9	60±0.8	62±0.8	60.8
10	66±0.8	68±0.8	66.8

■ 安装夹板尺寸


KA-3/01 SNAP-IN THE MOUNTING PLATE

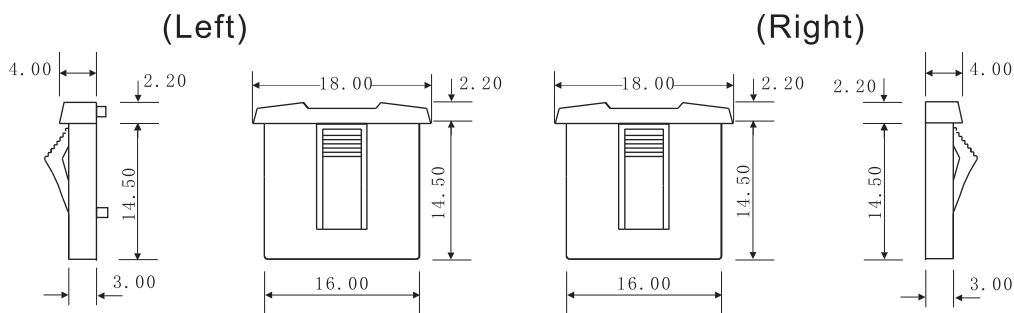

KA-3/02 SNAP-IN THE MOUNTING PLATE

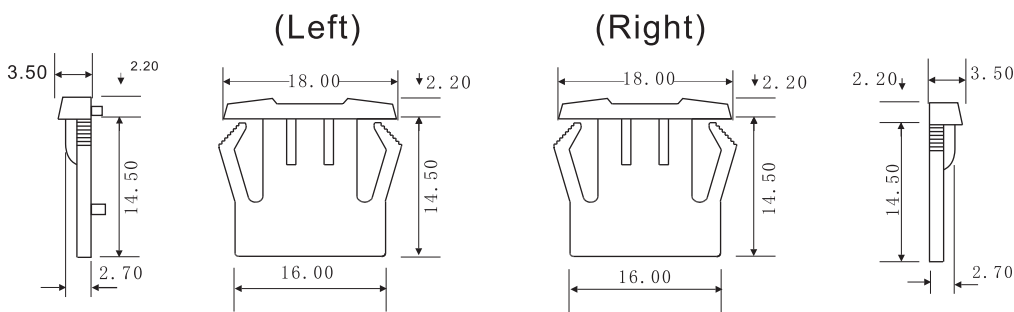


KA-3/03 SNAP-IN THE MOUNTING PLATE

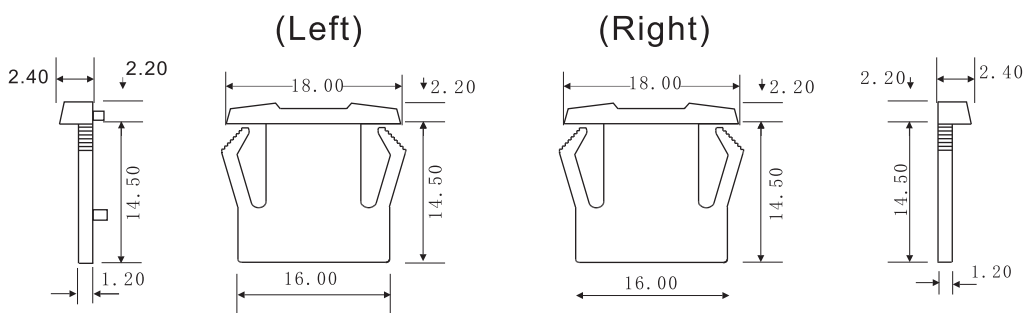

■ 中间板尺寸

KA-3
SNAP-IN THE MOUNTING PLATE

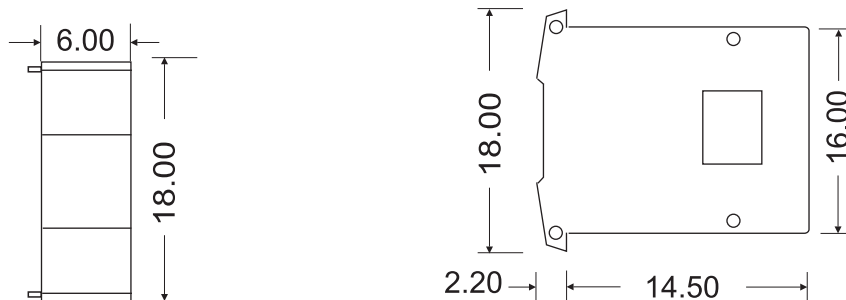

■ 输出编码

BCD 0-9;
1-2-4-8.10 POSITION

Dial Position	Common C Connected to Terminals = ●				
	C	1	2	4	8
0	●				
1	●	●			
2	●	●	●		
3	●	●	●	●	
4	●	●	●	●	●
5	●	●	●	●	●
6	●	●	●	●	●
7	●	●	●	●	●
8	●	●	●	●	●
9	●	●	●	●	●

SPDT REPEATING; 10 POSITION
PLUS (+) AND MINUS (-) ALTERNATING


Dial Position	Common C Connected to Terminals = ●	
	C	+ -
+	●	●
-	●	●
+	●	●
-	●	●
+	●	●
-	●	●
+	●	●
-	●	●
+	●	●
-	●	●

DECIMAL-1 POLE; 10 POSITION


Dial Position	Common C Connected to Terminals = ●									
	C	0	1	2	3	4	5	6	7	8
0	●	●								
1	●		●							
2	●			●						
3	●				●					
4	●					●				
5	●						●			
6	●							●		
7	●								●	
8	●									●
9	●									●

■ 接线板尺寸


KA-3/A

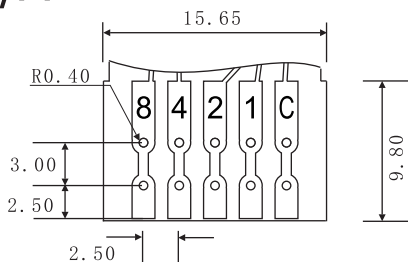


KA-3/B

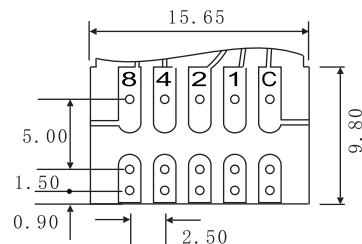


KA-3/C

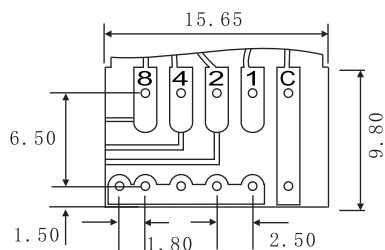


KA-3/D



KA-3/E

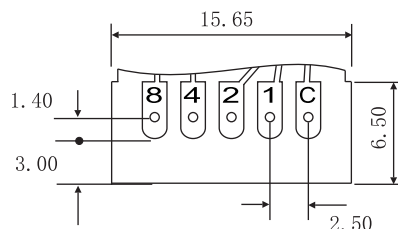

KA-3/F

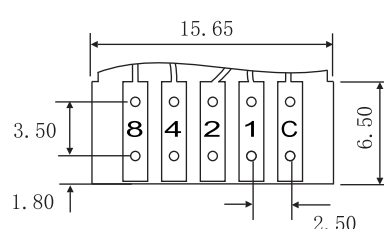

■ 手工焊锡：

焊锡温度350℃以下，连续焊锡时间2秒以下

■ 处理时注意事项：

如需在P.C.B板面上助焊剂，必须谨慎操作，不能渗入开关内部。

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.