

Model:LN112-4

Characteristics:

It is used for switching power supply,suppressing common mode interference signal.

Technical index:


- Installation method: PCB
- Flame resistance: UL94-V0
- Operating temperature: -20℃~+100℃
- Storage temperature: -20℃~+100℃
- Frequency range: DC~1KHz
- Dielectric strength: 1.5KV/1min (between two coils)
4KV/1min (between coil&shell)




Electrical parameters:

Rated current	4	A
Inductance 1KHz,0.3V	0.7	mH
Inductance error	-30~+50	%
DC resistance	27	mΩ
Maximum operating voltage	250	V
Permissible inrush current	20 times of rated current(ms)	
Weight	6	g


Schematic wiring diagram:

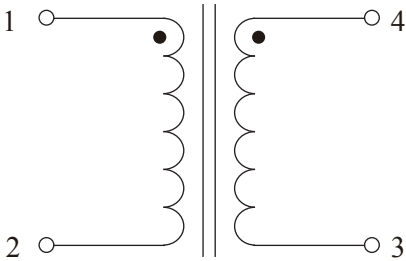


Dimensions(in mm):

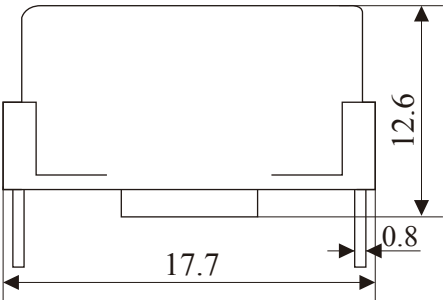

Front View



Side View

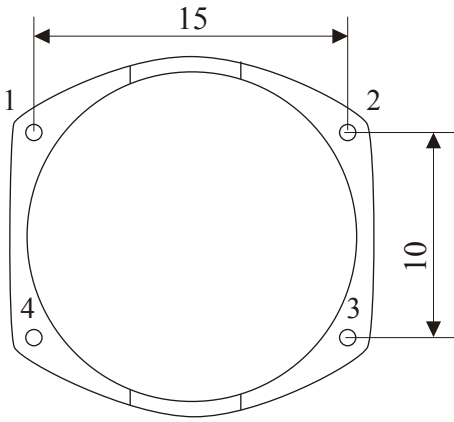

Bottom View