
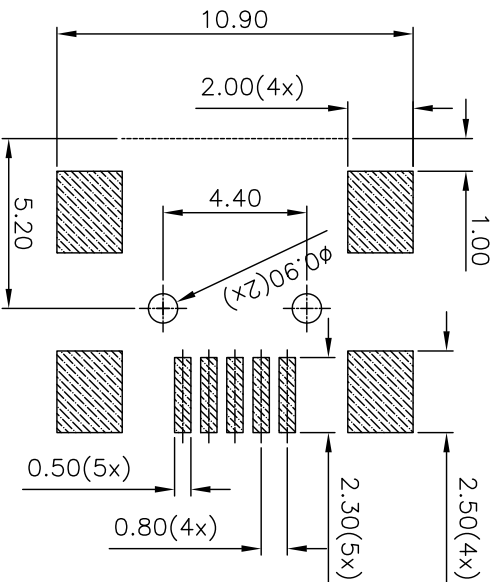
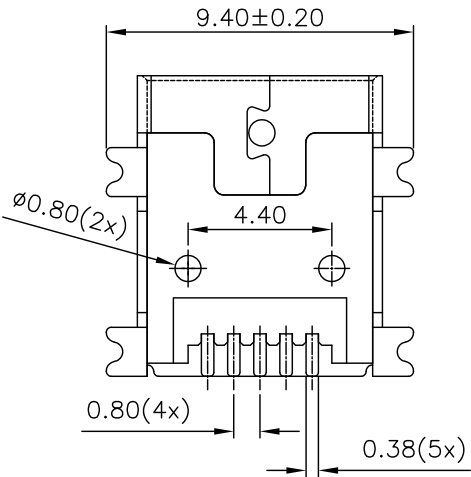
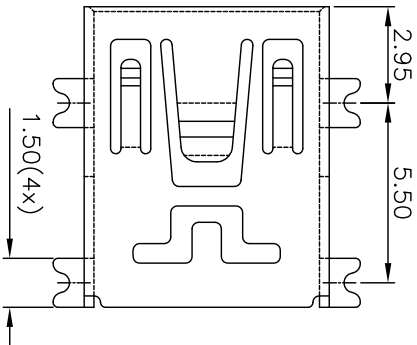
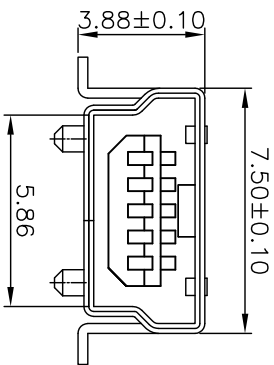


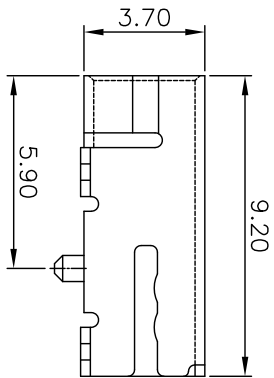

RECOMMENDED PCB LAYOUT

规格说明:Specifications:
电气特性:Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

原材料:Raw material:

1. 塑胶:Plastic cement:
Hing Temperature Thermoplastics,
LCP Black
2. 端子:Contact:Copper Alloy C2680/C5191
3. 外壳:Shell: SPC/Copper Alloy C2680

电镀:Electroplate:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳:Shell:
Nickel Plating

MODEL: USB MN5-001	DRAWN BY : Leiqin	DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED)
TITLE : MINI USB 5P SMT	CHECKED BY : Liwei	DATE:	X. ±0.30mm X.* ± 3°
DRAWING NO.:	REV. : A	DATE:	X.X ±0.25mm X.X* ± 2°
SHEET: 1 OF 1	SCALE: 3:1	DATE:	X.XX ±0.20mm X.XX* ± 1°
	SIZE: A4	DATE:	X.XXX±0.10mm X.XXX ± 0.5°

MEASURE POINT:

QUADRANT POINT (QD)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

深圳市吉威电子有限公司
SZJUSTWELL ELECTRONICS CO., LTD

SZJUSTWELL

REVISIONS

NO: PARTICULAR BY DATE

1

2

3

4

5

6

7

8

http://www.szjustwell.com 0755-33000755