

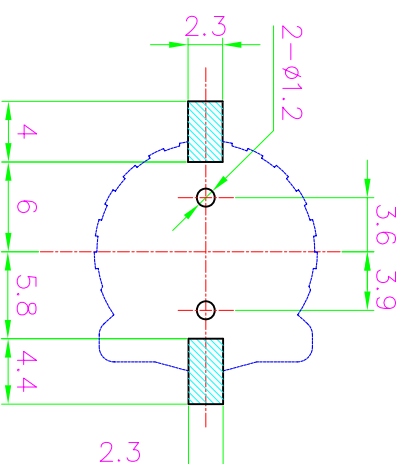
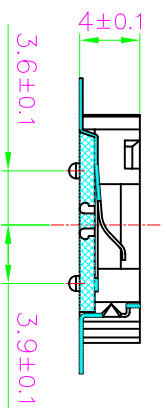


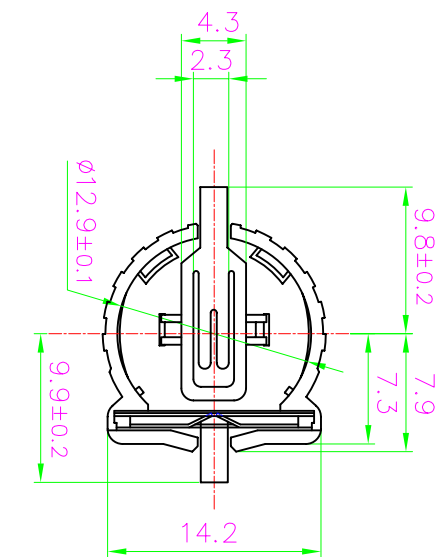

- Main specification:
1. Contact resistance: $30\text{m}\Omega$ min.
 2. Insulation resistance: $1000\text{M}\Omega$ max.
 3. Withstand voltage: 500V AC for 1 minute.

PCB Holes Diagram

Top View

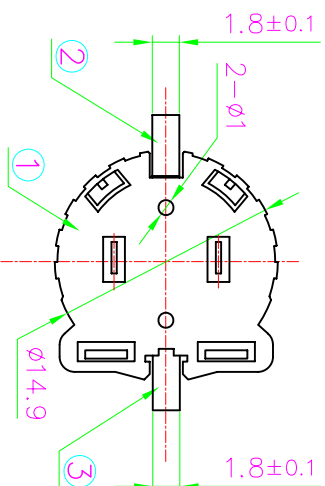

Tolerance: Unless otherwise specified			
	≤ 1.5	± 0.1	
1	TERMINAL-2	QSn6.5-0.2	Au-Plated
2	TERMINAL-1	QSn6.5-0.2	Au-Plated
1	HOUSING	xqc; PPA	BLACK
NO.	PART NAME	MATERIAL	COLOR/FINISHED

			BATTERY HDLDER	
日期DATE	单位UNITS	审核CHECK		
2011/2/14	mm			
比例SCALE	制图DRAW	设计DESIGN		
1/1				
			两PIN电池座卧式SMT (BS-1220-2)	