HSF RoHS

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 260℃±5° 5S
客户料号：706068881

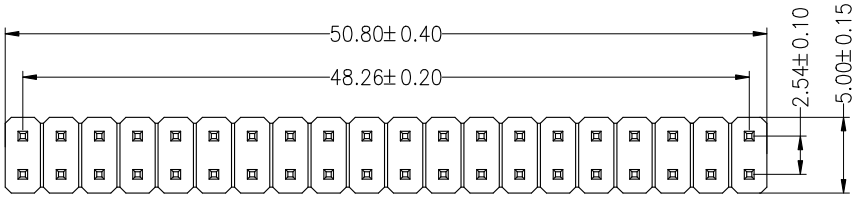

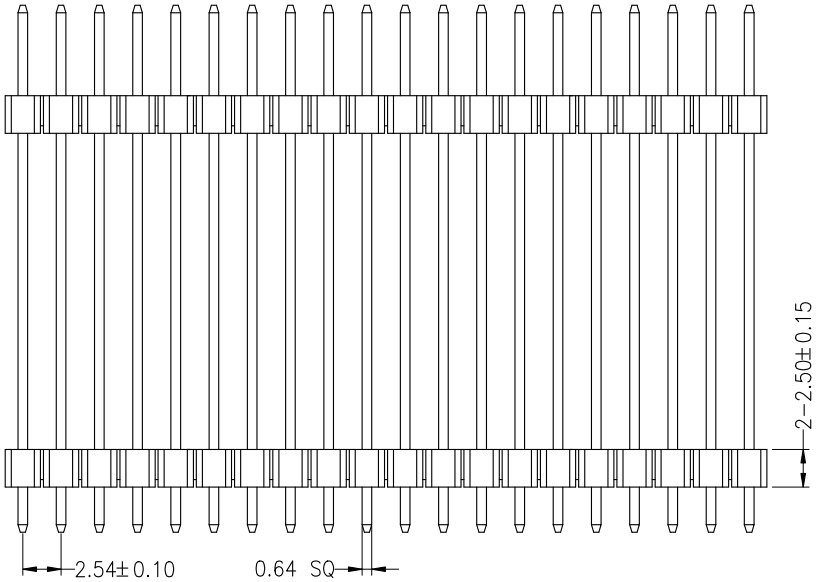

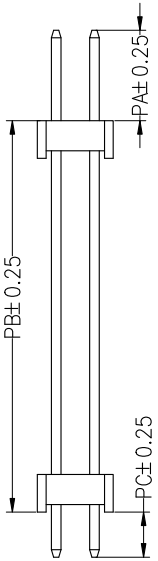

Ordering Information

1225 22 20 X N XX S XXX X XX

- No.of Pins Per Row: 20P
- Insulator Material Option: A=BK-PBT, C=BK-PA6T, E=BK-PA9T, F=BK-LCP
- Contact Plating: G0:Gold Flash, G1:1u" Gold, G2:1.5u" Gold, G3:2u" Gold, G4:3u" Gold, G5:5u" Gold, G6:10u" Gold, G7:15u" Gold, G8:30u" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length
- Packing: 0=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap
- code stream: 01~99

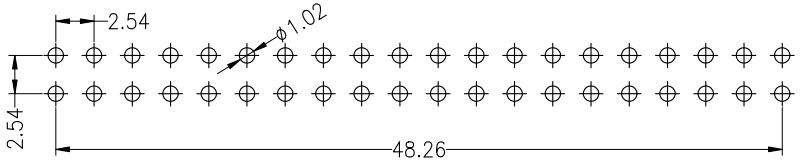

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimension antitheses list			
ITEM	PA	PB	PC
Standard	6.00	26.00	3.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2023.02.13	NEW DRAWING	

OPERATION				
DRAW	RICH LIN	23.02.13	X.X	±0.30
CHECK			X.XX	±0.20
			X.XXX	±0.10
APPROVE			Angle	±3°
			DIM	TOL

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JiLN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5588

PART NO.	12252220XNXXSXXXXXX
TITLE:	2.54PH Dual Row Double Plastic 180° H=2.5