




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C




Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 260°C±5° 5S

客户料号: 706068882



注: 缺第5.6P

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

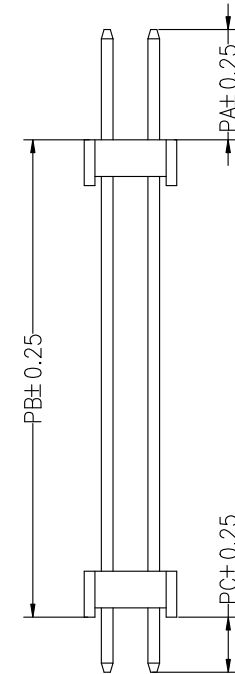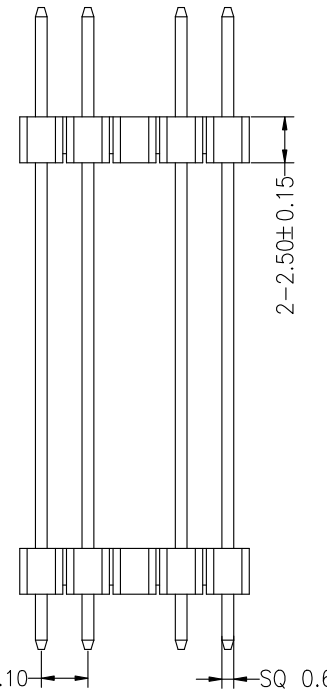

Ordering Information

1225 22 05 X N XX S XXX X XX

- No.of Pins Per Row 05P
- Insulator Material Option
 A=BK-PBT
 C=BK-PA6T
 E=BK-PA9T
 F=BK-LCP
- Contact Plating
 G0:Gold Flash
 G1:1u" Gold
 G2:1.5u" Gold
 G3:2u" Gold
 G4:3u" Gold
 G5:5u" Gold
 G6:10u" Gold
 G7:15u" Gold
 G8:30u" Gold
 S0:Gold Flash/Tin
 SN:Tin
- Pin Length
- Packing
 0=PE Bag
 A=Tray
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar
- code stream 01~99

Dimension antitheses list			
ITEM	PA	PB	PC
Standard	6.00	26.00	3.00

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

		OPERATION		DRAW	RICH LIN	23.02.13	SCALE	FIT
		X.X	±0.30					
		X.XX	±0.20	CHECK			UNIT	mm
A	2023.02.13	X.XXX	±0.10	APPROVE			SIZE	A4
REV	DATE	MODIFICATION DESCRIPTION	CHANGE		Angle			SHEET
				DIM	TOL		PROJ.	☯

PART NO.	12252205XNXXSXXXXXX
TITLE:	2.54PH H2.5mm 2X5P 180°