



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy


Contact Plating:Au Or Sn Over Ni

Insulator Material:Polyester(UL94V-0)



Standard: PA6T

Max.Processing Temp: 260°C $\pm$ 5°C 5S

客户料号: 706039143

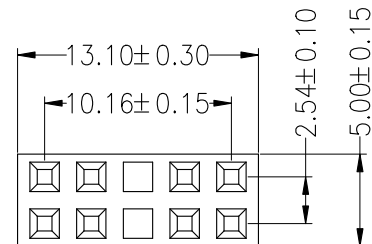

注: 缺5.6P

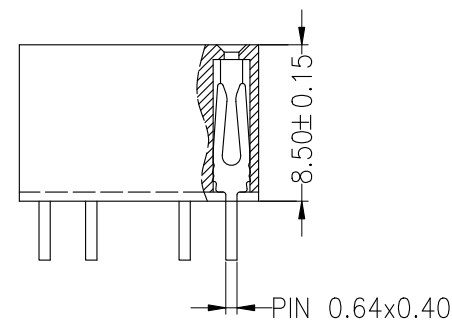

Ordering Information

2285 02 05 X N XX S Y X XX


No.of Pins
Per Row
05P

Insulator Material
Option
A=BK-PBT
C=BK-PA6T
E=BK-PA9T
F=BK-LCP

Contact Plating
G1:Gold Flash
G2:1.5u" Gold
G3:2u" Gold
G4:3u" Gold
G5:5u" Gold
G6:10u" Gold
G7:15u" Gold
G8:30u" Gold
S0:Gold Flash/Tin
SN:Tin

Packing
0=PE Bag
A=Tray
T=Tube
P=Tube+Cap
R=Reel+Cap
M=Reel+Mylar

code stream
01~99

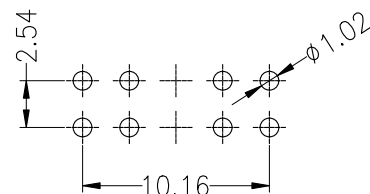

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

				OPERATION		DRAW	RICH LIN	23.02.13	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				CHECK			
				X.XX	±0.20	APPROVE				SIZE		
A0	2023.02.13	NEW DRAWING		X.XXX	±0.10					SHEET	1/1	PART NO.
				Angle	± 3°							
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			PROJ.		TITLE:	2.54PF H8.5mm 2x5pin 180°