



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy



Contact Plating:Au Or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T


Max.Processing Temp: 260°C±5°C 5S

客户料号: 706068883

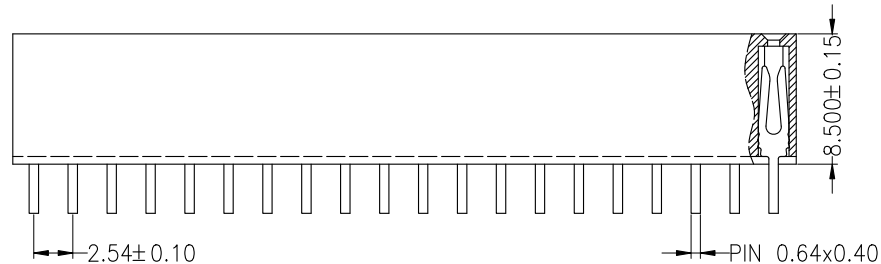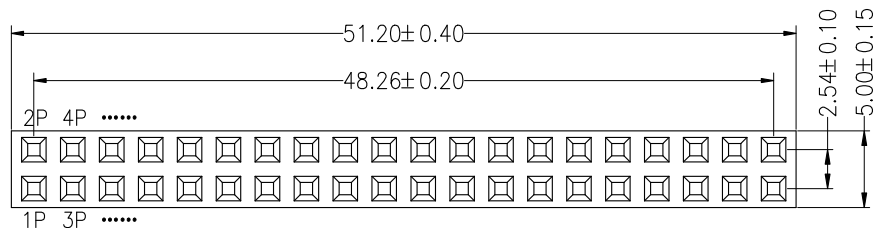

Ordering Information

2285		02	20	X	N	XX	S	Y	X	XX
No. of Pins Per Row 20P		Insulator Material Option A=BK-PBT C=BK-PA6T E=BK-PA9T F=BK-LCP		Contact Plating G1:Gold Flash G2:1.5u" Gold G3:2u" Gold G4:3u" Gold G5:5u" Gold G6:10u" Gold G7:15u" Gold G8:30u" Gold S0:Gold Flash/Tin SN:Tin		Packing 0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar		code stream 01~99		

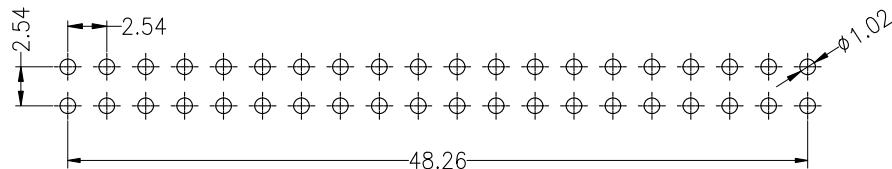

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	RICH LIN	23.02.13	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588			
				X.X	±0.30				CHECK					UNIT
				X.XX	±0.20	APPROVE								SIZE
A0	2023.02.13	NEW DRAWING		X.XXX	±0.10									SHEET
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	DIM	TOL	PROJ.						