



## SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy




Contact Plating:Au Or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 260°C±5°C 5S

客户料号:703478345

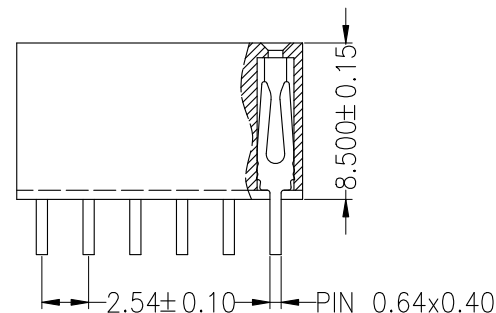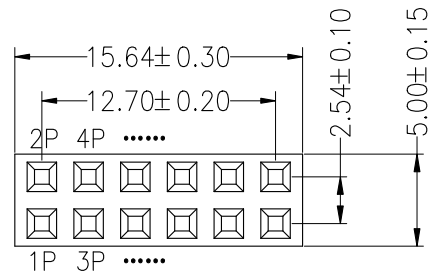

## Ordering Information

2285 02 06 X N XX S Y X XX


No.of Pins  
Per Row  
06P

Insulator Material  
Option  
A=BK-PBT  
C=BK-PA6T  
E=BK-PA9T  
F=BK-LCP

Contact Plating  
G1:Gold Flash  
G2:1.5u" Gold  
G3:2u" Gold  
G4:3u" Gold  
G5:5u" Gold  
G6:10u" Gold  
G7:15u" Gold  
G8:30u" Gold  
S0:Gold Flash/Tin  
SN:Tin

Packing  
0=PE Bag  
A=Tray  
T=Tube  
P=Tube+Cap  
R=Reel+Cap  
M=Reel+Mylar

code stream  
01~99

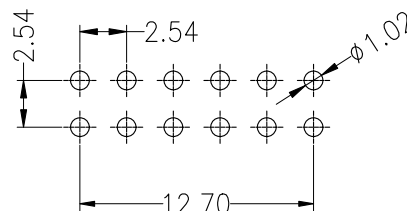

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

|     |            |                          |        |           |       |         |          |          |       |                                                                                       |                                                                                                                                                       |                           |
|-----|------------|--------------------------|--------|-----------|-------|---------|----------|----------|-------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
|     |            |                          |        | OPERATION |       | DRAW    | RICH LIN | 23.02.13 | SCALE | FIT                                                                                   | <div><div>JILN®</div><div>深圳市锦凌电子有限公司</div><div>SHENZHEN JINLING ELECTRONICS CO.,LTD</div><div>Tel: 86-755-27483253 Fax: 86-755-2997-5588</div></div> |                           |
|     |            |                          |        | X.X       | ±0.30 |         |          |          | CHECK |                                                                                       |                                                                                                                                                       |                           |
|     |            |                          |        | X.XX      | ±0.20 | APPROVE |          |          |       | SIZE                                                                                  |                                                                                                                                                       |                           |
| A0  | 2023.02.13 | NEW DRAWING              |        | X.XXX     | ±0.10 |         |          |          |       | SHEET                                                                                 | 1/1                                                                                                                                                   | PART NO.                  |
|     |            |                          |        | Angle     | ±3°   |         |          |          |       |                                                                                       |                                                                                                                                                       |                           |
| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE | DIM       | TOL   |         |          |          | PROJ. |  | TITLE:                                                                                                                                                | 2.54PF H8.5mm 2x6pin 180° |