



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy


Contact Plating:Au Or Sn Over Ni

Insulator Material:Polyester(UL94V-0)



Standard: PA6T

Max.Processing Temp: 260°C±5°C 5S

客户料号: 703478346




注: 缺3-6P

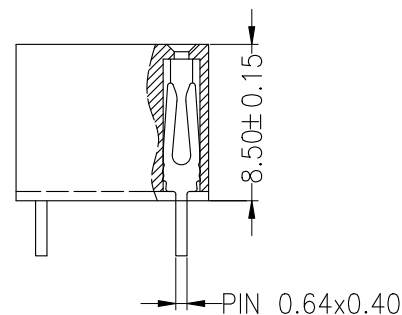

Ordering Information

2285 02 04 X N XX S Y X XX

No.of Pins Per Row 04P	Insulator Material Option A=BK-PBT C=BK-PA6T E=BK-PA9T F=BK-LCP	Contact Plating G1:Gold Flash G2:1.5u" Gold G3:2u" Gold G4:3u" Gold G5:5u" Gold G6:10u" Gold G7:15u" Gold G8:30u" Gold S0:Gold Flash/Tin SN:Tin	Packing 0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar	code stream 01~99
------------------------------	--	---	---	----------------------



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	RICH LIN	23.02.13	SCALE	FIT	JILN®深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				CHECK			
				X.XX	±0.20	APPROVE						
A0	2023.02.13	NEW DRAWING		X.XXX	±0.10							SHEET
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	TOL	PROJ.					TITLE: