
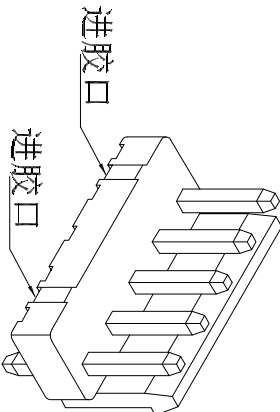
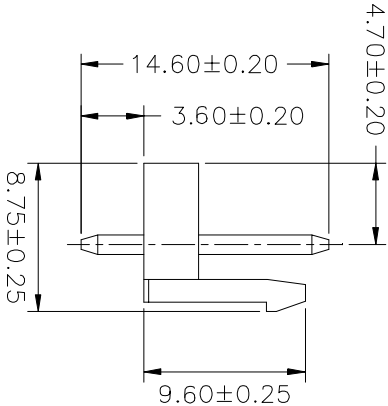


备注：2P为1个进胶点， 3P和3P以上为2个进胶点

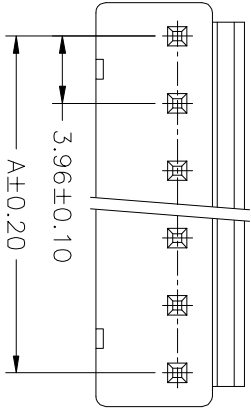




SPECIFICATIONS
Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding oltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66,UL94V-0
Color: Natural(White)

A3963W-NP -□-□-□-□
① ② ③ ④

- ① Material:
0=PA66 V0;
② Color code:
NA=Natural
③ Pin information:
TB=Brass plating tin
④ Client code

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A3963WV-02P	3.96	7.92
A3963WV-03P	7.92	11.88
A3963WV-04P	11.88	15.84
A3963WV-05P	15.84	19.80
A3963WV-06P	19.80	23.76
A3963WV-07P	23.76	27.72
A3963WV-08P	27.72	31.68
A3963WV-09P	31.68	35.64
A3963WV-10P	35.64	39.60
A3963WV-11P	39.60	43.56
A3963WV-12P	43.56	47.52
A3963WV-13P	47.52	51.48
A3963WV-14P	51.48	55.44
A3963WV-15P	55.44	59.40

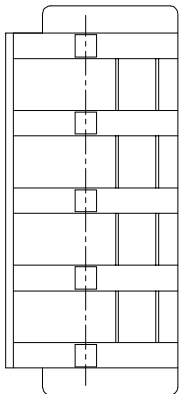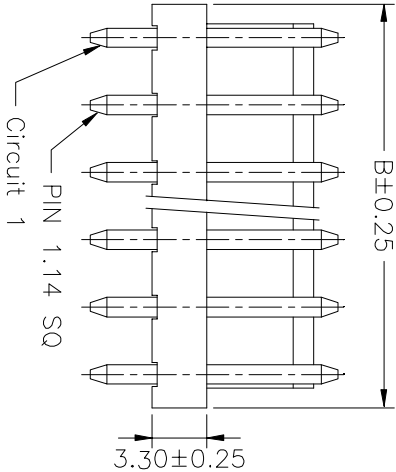

Unit: mm

REVISION	DATE	DESCRIPTION	APPROVAL BY	DRAWN BY	Li Huaming	DESIGNED BY	MATERIALS	SCALE	DATE
▲								1:1	2015/12/18
				CHECKED BY					

深圳市威尔杰电子有限公司

A3963WV-NP



0	±0.30
0.0	±0.25
0.00	±0.20
0.000	±0.10
VER. NO.	A0