


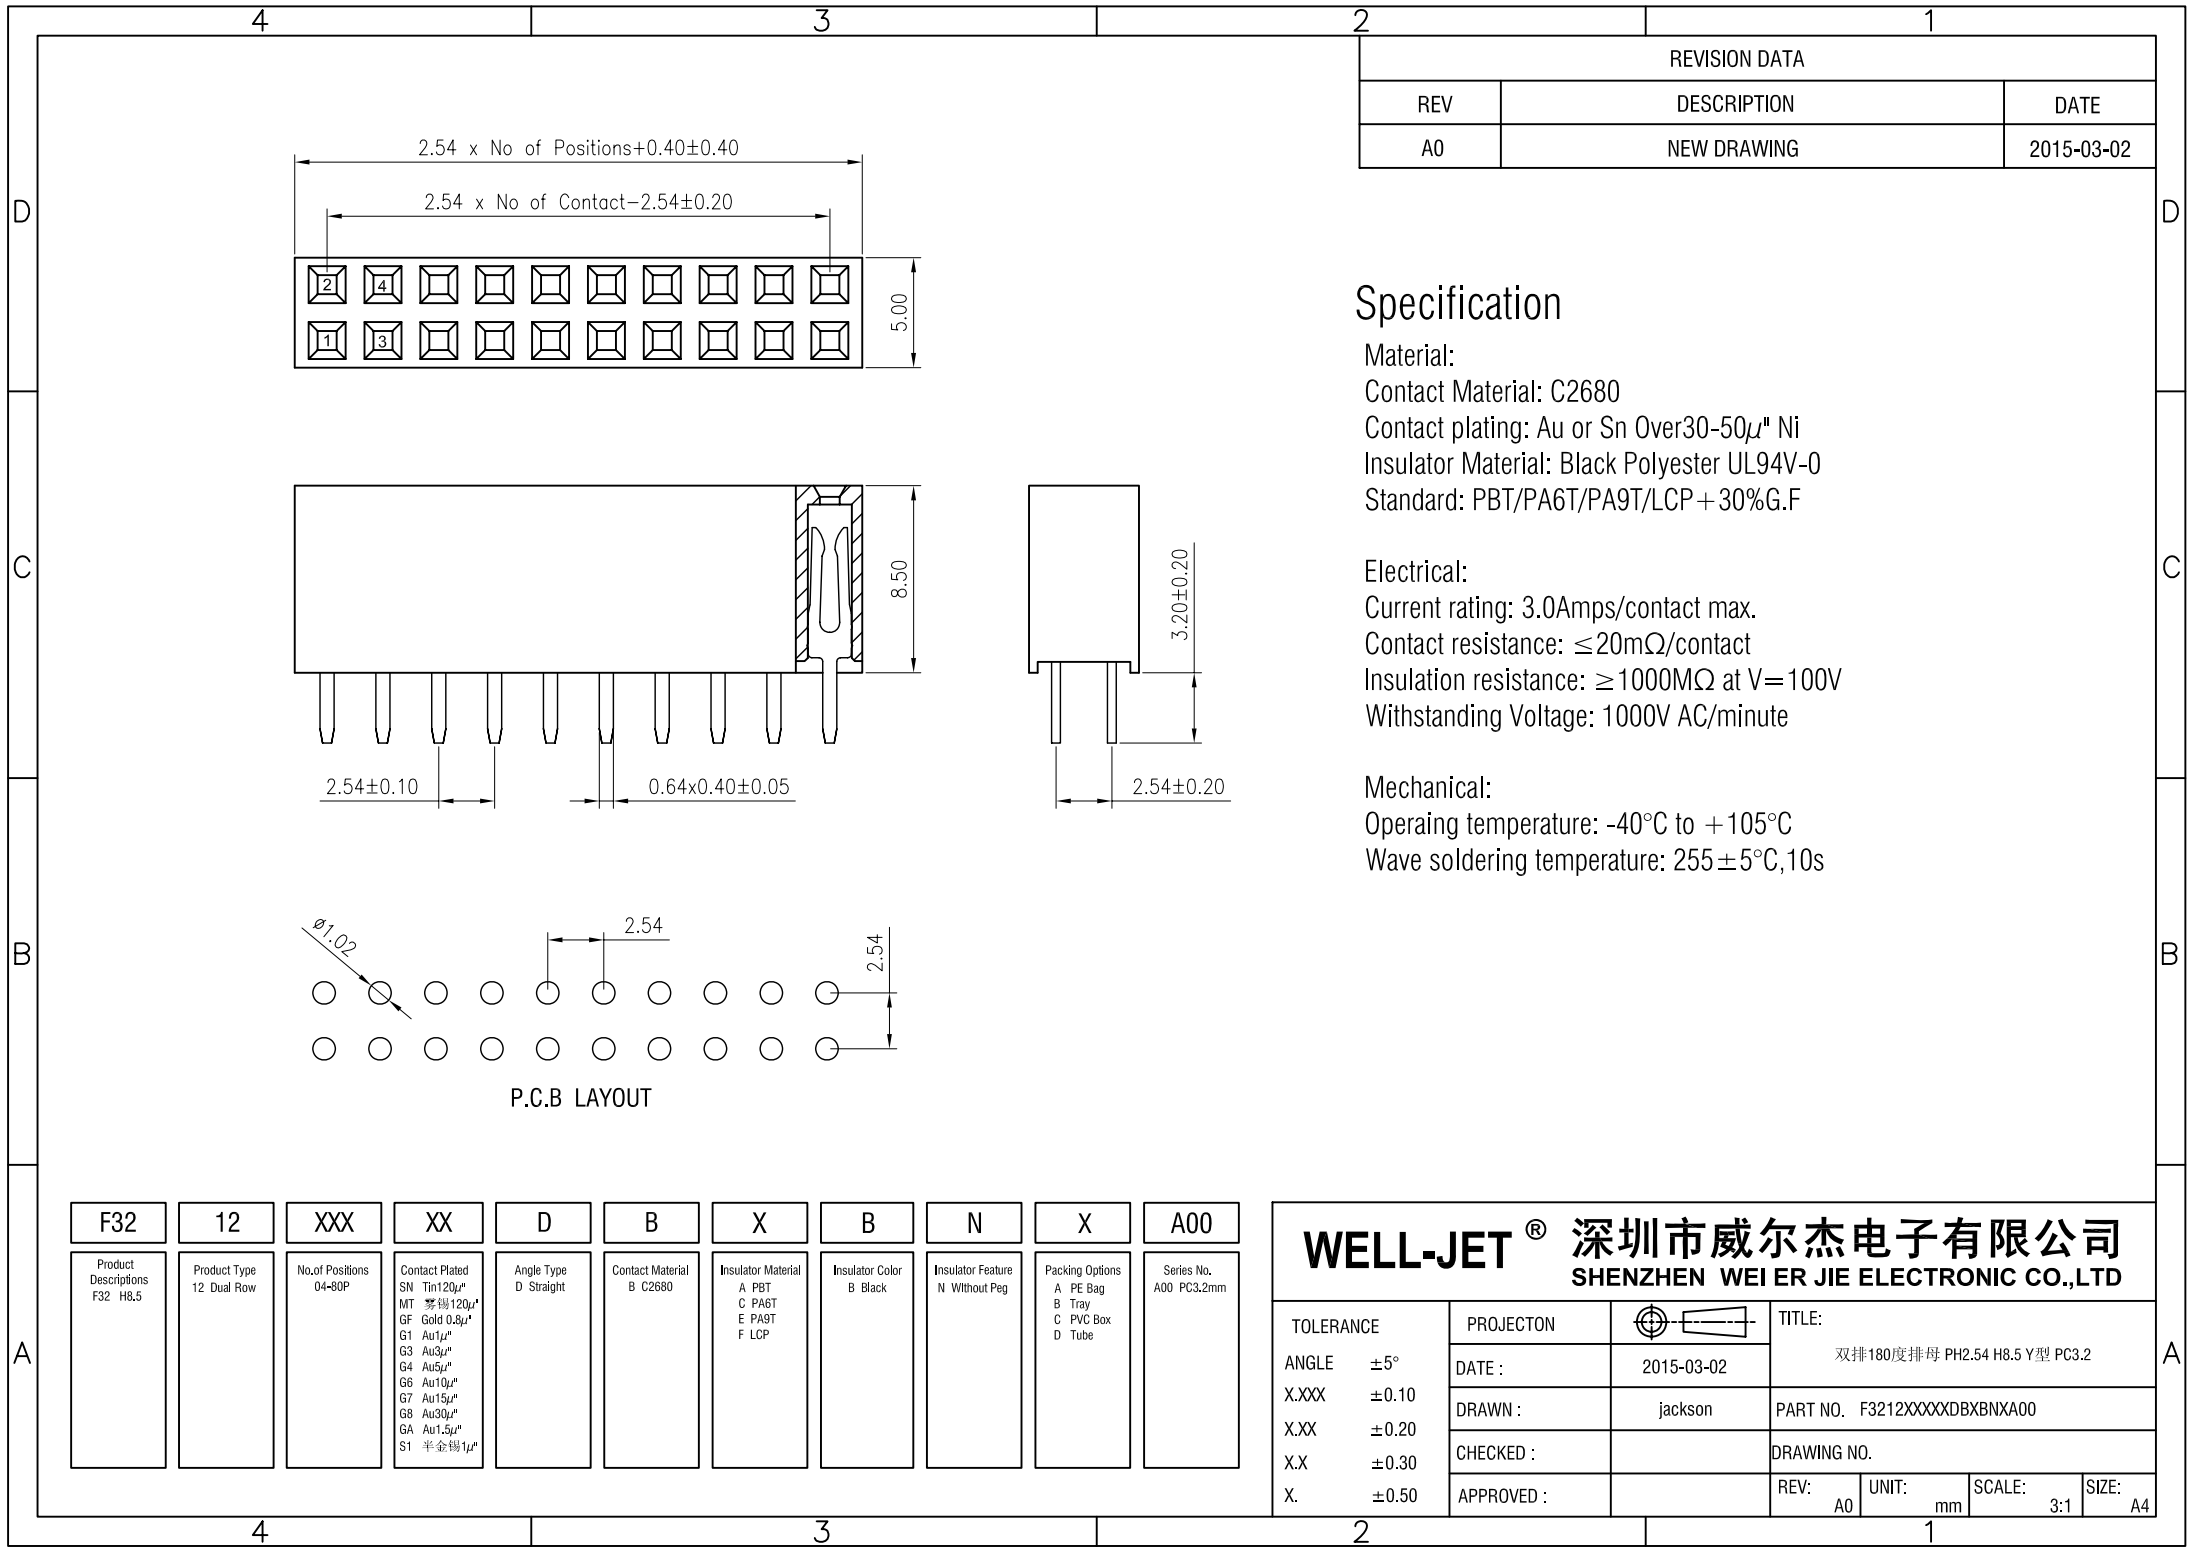


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2015-03-02

Specification

Material:
Contact Material: C2680
Contact plating: Au or Sn Over30-50μ" Ni
Insulator Material: Black Polyester UL94V-0
Standard: PBT/PA6T/PA9T/LCP + 30%G.F

Electrical:
Current rating: 3.0Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding Voltage: 1000V AC/minute

Mechanical:
Operating temperature: -40℃ to +105℃
Wave soldering temperature: 255±5℃,10s

WELL-JET® 深圳市威尔杰电子有限公司 SHENZHEN WEI ER JIE ELECTRONIC CO.,LTD					
TOLERANCE		PROJECTON		TITLE:	
ANGLE	±5°	DATE :	2015-03-02	双排180度排母 PH2.54 H8.5 Y型 PC3.2	
X.XXX	±0.10	DRAWN :	jackson	PART NO. F3212XXXXDBXBNXA00	
X.XX	±0.20	CHECKED :		DRAWING NO.	
X.X	±0.30	APPROVED :		REV: A0	UNIT: mm
X.	±0.50			SCALE: 3:1	SIZE: A4