3.2 x 1.6 x 1.3 (mm) WiFi / Bluetooth Chip Antenna (CW324S)

Engineering Specification

1. Product Number

H 2 U 3 8 D 1 E 1 B 0 1 0 0



2. Features

- *Stable and reliable in performances
- *Low profile, compact size
- *RoHS 2.0 compliance
- *SMT processes compatible
- *AEC-Q200 compliant

3. Applications

- *ISM 2.4 GHz applications
- *ZigBee/BLE applications
- *Bluetooth earphone systems
- *Hand-held devices when WiFi / Bluetooth functions are needed, e.g., Smartphones
- *IEEE802.11 b/g/n
- *Wireless PCMCIA cards or USB dongles

4. Description

Unictron's CW324S chip antenna is designed for ISM 2.4GHz applications, covering frequencies 2400~2500 MHz. Fabricated with proprietary design and processes, CW324S shows excellent performance and is fully compatible with SMT processes, which can decrease the assembly cost and improve the device's quality and consistency.



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane Designed by : Ken Checked by : Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 1.3 WiFi / Bluetooth Chip Antenna (CW324S) Engineering Specification

DOCUMENT NO.

H2U38D1E1B0100

C


PAGE 1 OF 11

5. Layout Guide & Electrical Specifications

5-1. Layout Guide (unit: mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to the customer's installation conditions.

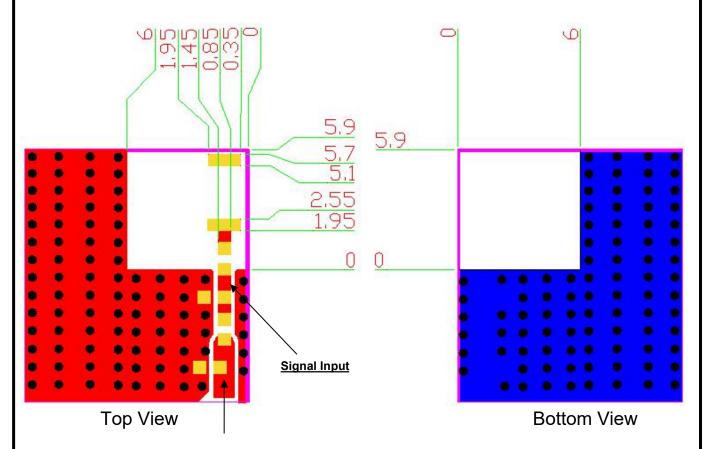

Transmission Line with 50Ω Impedance Characteristic



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane Designed by : Ken Checked by : Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 1.3 WiFi / Bluetooth Chip Antenna (CW324S) Engineering Specification

DOCUMENT NO.

H2U38D1E1B0100
C
PAGE 2 OF 11

5-2. Electrical Specifications (Evaluation Board Dimensions: 40 x 40 mm²) 5-2-1. Electrical Table

Characte	ristics	Specifications	Unit
Outline Dimensions		3.2 x 1.6 x 1.3	mm
Working Frequency		2400 ~ 2500	MHz
VSWR(@ center fre	equency)*	2 Max.	
Characteristic Impe	dance	50	Ω
Polarization		Linear Polarization	
Peak Gain	(@2442 MU=)	1.5 (typical**)	dBi
Efficiency	(@2442 MHz)	56.3 (typical**)	%


^{*}Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.

5-2-2. Return Loss & VSWR

Return Loss (S₁₁)

VSWR (S₁₁)



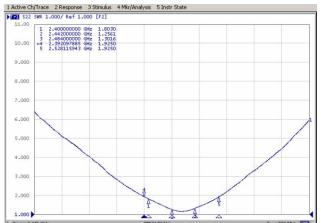



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

PAGE


Prepared by : Jane Designed by : Ken Checked by : Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 1.3 WiFi / Bluetooth Chip Antenna (CW324S) Engineering Specification


DOCUMENT NO.

H2U38D1E1B0100
C

^{**}A typical value is for reference only, not guaranteed.

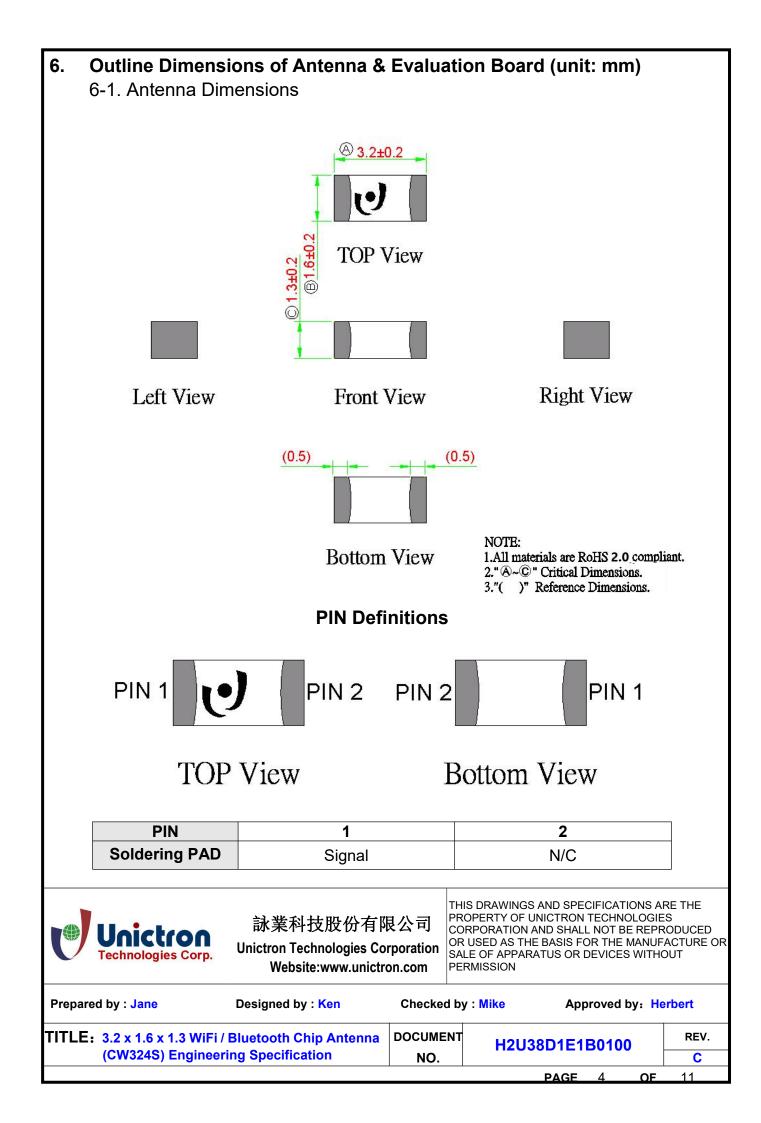

6-2. Evaluation Board with Antenna

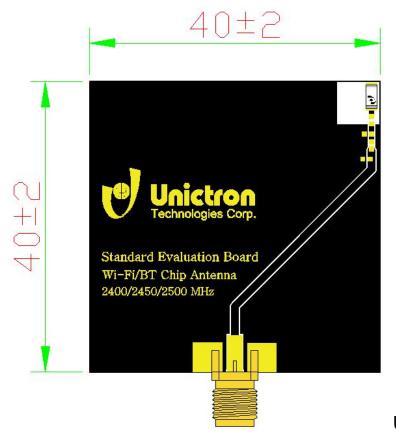

Unit: mm



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane Designed by : Ken Checked by : Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 1.3 WiFi / Bluetooth Chip Antenna D

(CW324S) Engineering Specification

DOCUMENT NO.


H2U38D1E1B0100

REV.

PAGE 5 **OF** 1

7. Radiation Pattern (with 40 x 40 mm² Evaluation Board)

7-1. 3D Gain Radiation Pattern @ 2442 MHz (unit: dBi)

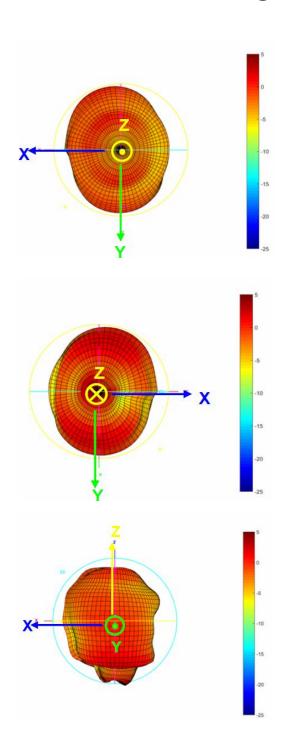





詠業科技股份有限公司 Unictron Technologies Corporation

Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane Designed by : Ken Checked by : Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 1.3 WiFi / Bluetooth Chip Antenna (CW324S) Engineering Specification


DOCUMENT NO.

H2U38D1E1B0100
C
PAGE 6 OF 11

7-2. 3D Efficiency Table

Frequency(MHz)	2400	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472	2484	2500
Efficiency(dB)	-2.9	-2.8	-2.7	-2.7	-2.6	-2.6	-2.5	-2.5	-2.6	-2.5	-2.5	-2.4	-2.5	-2.5	-2.6	-2.7
Efficiency(%)	51.8	52.1	53.1	54.3	54.9	55.5	55.7	56.3	55.4	56.4	56.5	57.1	56.8	56.6	54.4	53.1
Peak Gain(dBi)	1.2	1.2	1.3	1.3	1.3	1.4	1.6	1.5	1.5	1.5	1.4	1.5	1.4	1.4	1.2	1.1

7-3. 3D Efficiency vs. Frequency

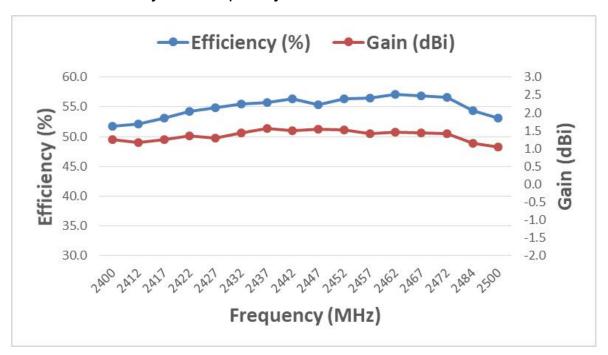



詠業科技股份有限公司 Unictron Technologies Corporation

ctron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane Designed by : Ken Checked by : Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 1.3 WiFi / Bluetooth Chip Antenna (CW324S) Engineering Specification


DOCUMENT NO.

H2U38D1E1B0100

C
PAGE 7 OF 11

8. Frequency tuning and Matching circuit 8-1. Chip antenna tuning scenario: 4. Fine tuning element Signal Input

With the following recommended values of matching and tuning components, the center frequencies will be about 2442 MHz at our standard 40 x 40 mm² evaluation board. However, these are typical reference values that may need to be changed when circuit boards or part vendors are different.



8-2. Matching circuit:

System Matching Circuit Component					
Location	Description	Vendor	Tolerance		
1	N/A	-	-		
2	1.6nH, (0402)	MURATA	±0.1nH		
3	0.7pF, (0402)	MURATA	±0.05pF		
4 Fine-tuning element	8.2nH, (0402)	MURATA	±2%		



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

PAGE

Matching circuit

Prepared by : Jane Designed by : Ken Checked by : Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 1.3 WiFi / Bluetooth Chip Antenna (CW324S) Engineering Specification


DOCUMENT NO.

H2U38D1E1B0100

C

9. Soldering Conditions

Typical Soldering Profile for Lead-free Process

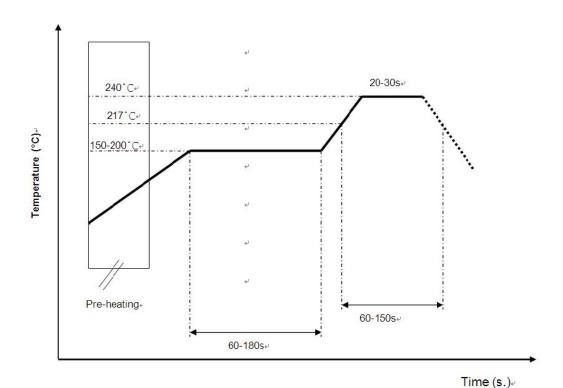

*Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane Designed by : Ken Checked by : Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 1.3 WiFi / Bluetooth Chip Antenna DOCUMENT

(CW324S) Engineering Specification

DOCUMENT NO.

H2U38D1E1B0100


REV.

PAGE 9 **OF** 1

10. Packing

- (1) Quantity/Reel: 2000pcs/Reel
- (2) Plastic tape: Black Conductive Polystyrene.

a. Tape Drawing

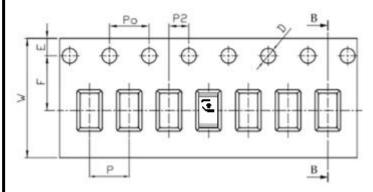

b. Tape Dimensions (unit: mm)

Feature	Specifications	Tolerances		
W	8.00	±0.30		
Р	4.00	±0.10		
E	1.75	±0.10		
F	5.50	±0.10		
P2	2.00	±0.10		
D	1.50	+0.10		
	1.50	-0.00		
Po	4.00	±0.10		
10Po	40.00	±0.20		

11. Operating & Storage Conditions

11-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C
- (3) Relative Humidity: 10% to 70%

11-2. Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

11-3. Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a

11-4. Storage (After mounted on customer's PCB with SMT process)

- (1) Storage Temperature: -40°C to 85°C
- (2) Relative Humidity: 10% to 70%



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Jane Designed by: Ken Checked by: Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 1.3 WiFi / Bluetooth Chip Antenna (CW324S) Engineering Specification

DOCUMENT NO.

H2U38D1E1B0100
C
PAGE 10 OF 11

12. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.



詠業科技股份有限公司 Unictron Technologies Corporation

tron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane Designed by : Ken Checked by : Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 1.3 WiFi / Bluetooth Chip Antenna (CW324S) Engineering Specification

DOCUMENT NO.

H2U38D1E1B0100

REV.

PAGE 11 OF 11