


5.0 x 1.0 x 1.3 (mm) WiFi / Bluetooth Chip Antenna (CW504)

Engineering Specification

1. Product Number

H 2 U 3 6 F 1 K 1 B 0 1 0 0

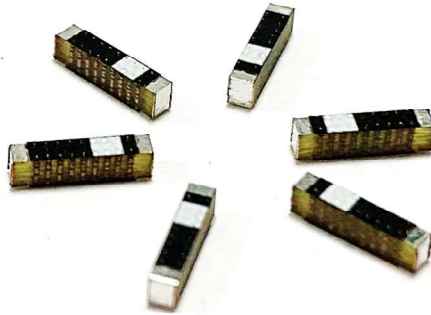

2. Features

- *Stable and reliable in performances
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. Applications

- *ISM 2.4 GHz applications
- *ZigBee/BLE applications
- *Bluetooth earphone systems
- *Hand-held devices when WiFi / Bluetooth functions are needed, e.g., Smart phones
- *IEEE802.11 b/g/n
- *Wireless PCMCIA cards or USB dongles

4. Description

Unictron's CW504 chip antenna is designed for ISM 2.4GHz applications, covering frequencies 2400~2500 MHz. Fabricated with proprietary design and processes, CW504 shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency.



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Peter

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 1.0 x 1.3 WiFi / Bluetooth Chip Antenna (CW504) Engineering Specification

DOCUMENT NO.

H2U36F1K1B0100

REV.


B

5. Layout Guide & Electrical Specifications

5-1. Layout Guide (unit : mm)

Solder Land Pattern:

The solder land pattern (golden marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

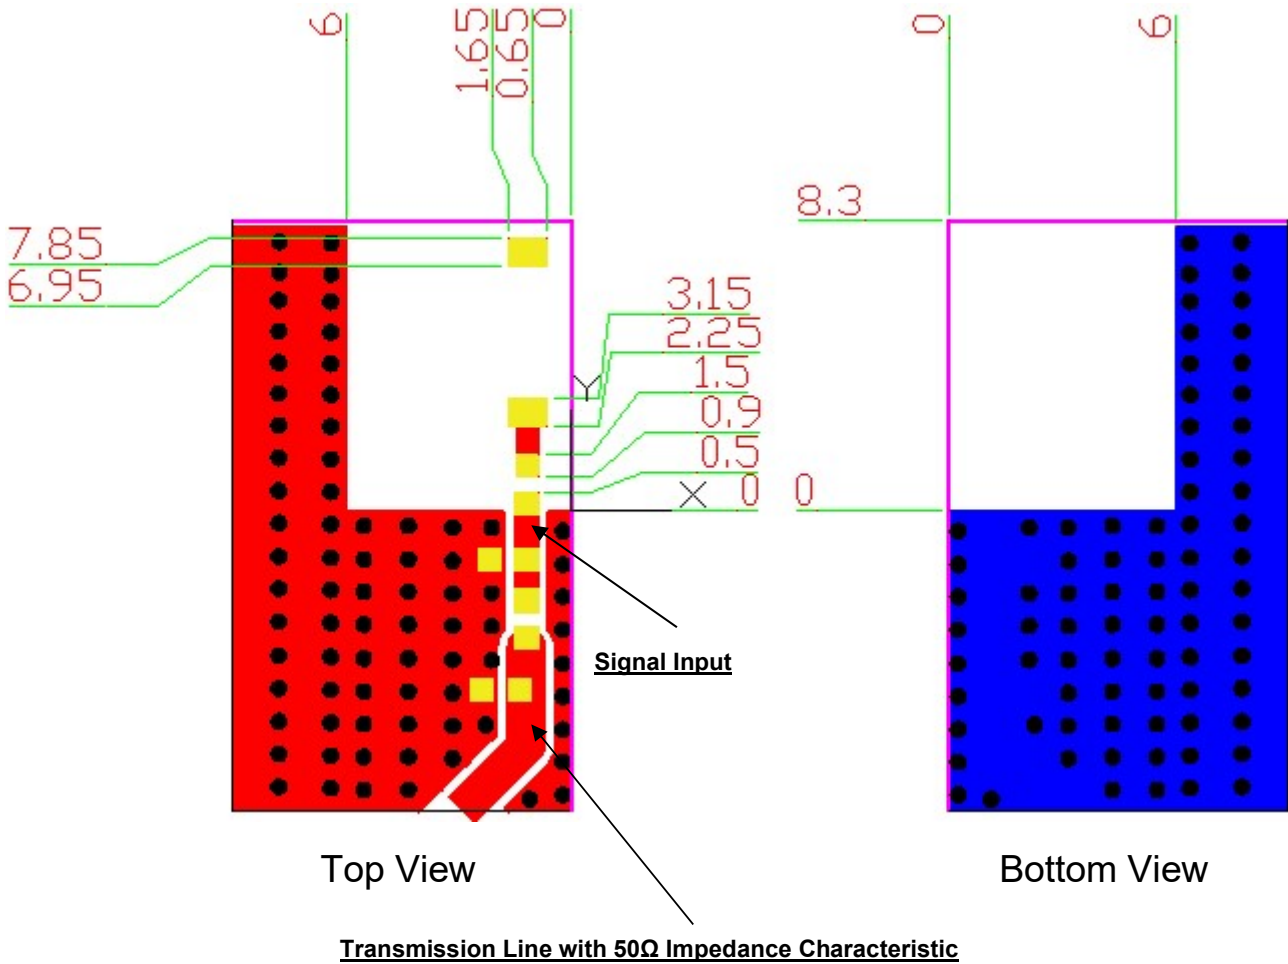

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Peter

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 1.0 x 1.3 WiFi / Bluetooth Chip Antenna (CW504) Engineering Specification

DOCUMENT NO.

H2U36F1K1B0100

REV. B

5-2. Electrical Specifications (Evaluation Board Dimensions: 40 x 40mm²)


5-2-1. Electrical Table

| Characteristics | | Specifications | Unit |
|----------------------------|-------------|---------------------|------|
| Outline Dimensions | | 5.0 x 1.0 x 1.3 | mm |
| Ground Plane Dimensions | | 40 x 40 | mm |
| Working Frequency | | 2400~ 2500 | MHz |
| VSWR (@ center frequency)* | | 2 Max | |
| Characteristic Impedance | | 50 | Ω |
| Polarization | | Linear Polarization | |
| Peak Gain | (@2442 MHz) | 2.8 (typical**) | dBi |
| Efficiency | | 58 (typical**) | % |

*Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.

**A typical value is for reference only, not guaranteed.

5-2-2. Return Loss & VSWR

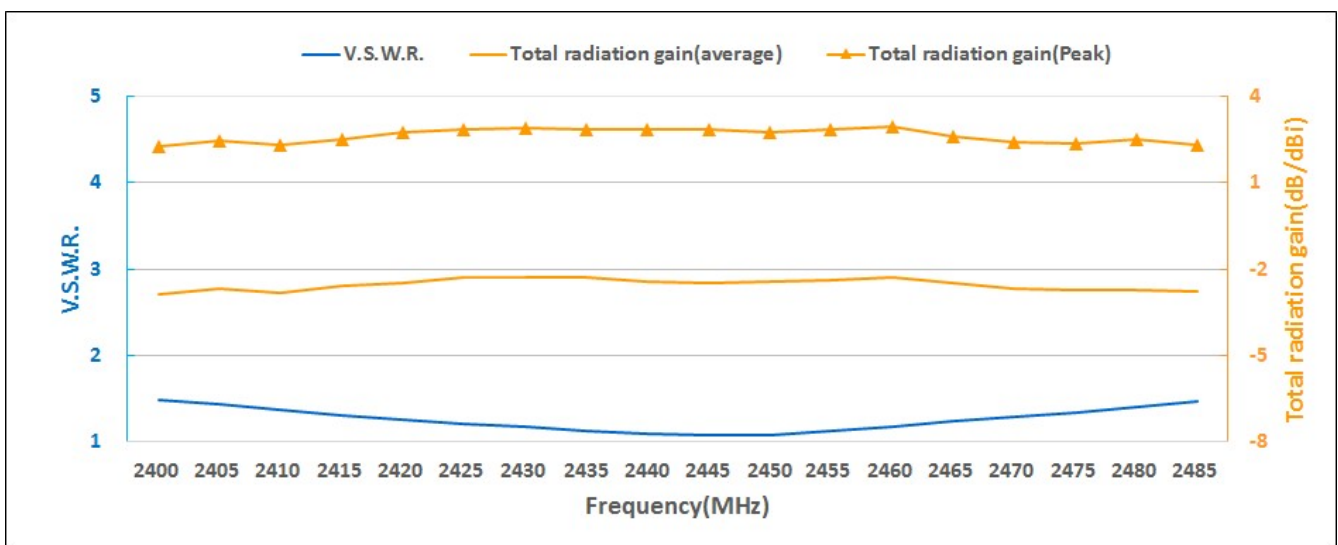

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Peter

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 1.0 x 1.3 WiFi / Bluetooth Chip Antenna (CW504) Engineering Specification


DOCUMENT NO.

H2U36F1K1B0100

REV. B

6. Outline Dimensions of Antenna & Evaluation Board (unit: mm)

6-1. Antenna Dimensions

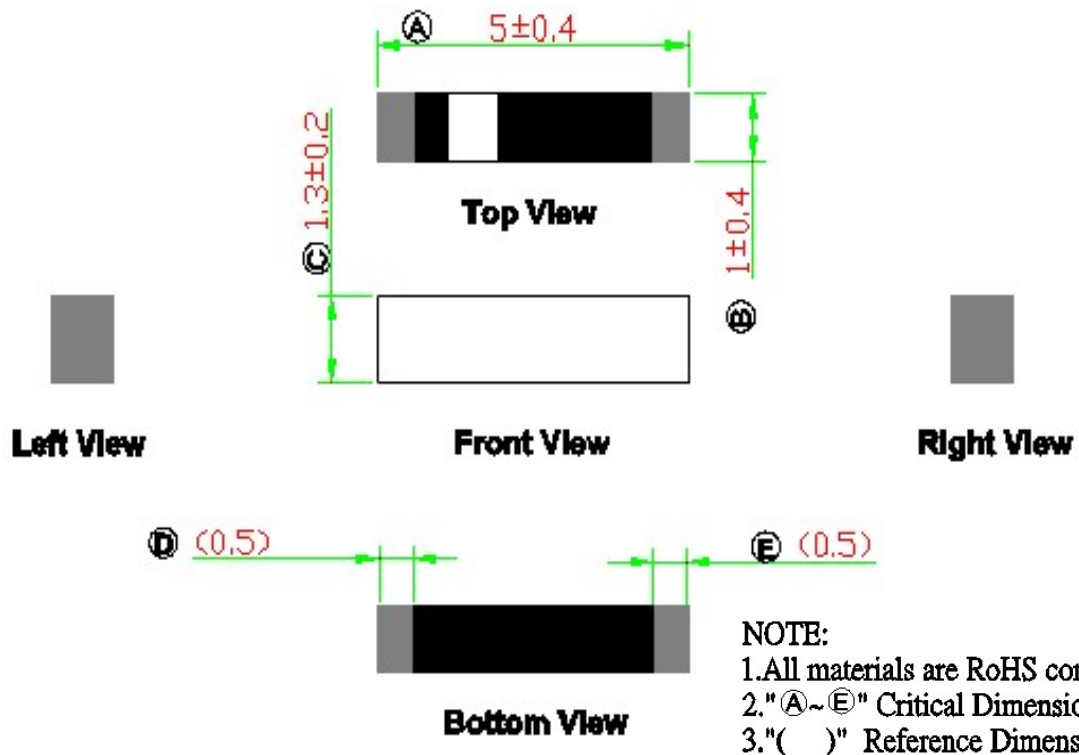

PIN Definition



Top View

Bottom View

| PIN | 1 | 2 |
|---------------|--------|-----|
| Soldering PAD | Signal | N/C |



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Peter

Checked by : Mike

Approved by : Herbert


TITLE : 5.0 x 1.0 x 1.3 WiFi / Bluetooth Chip Antenna (CW504) Engineering Specification

DOCUMENT NO.

H2U36F1K1B0100

REV.
B

6-2. Evaluation Board with Antenna

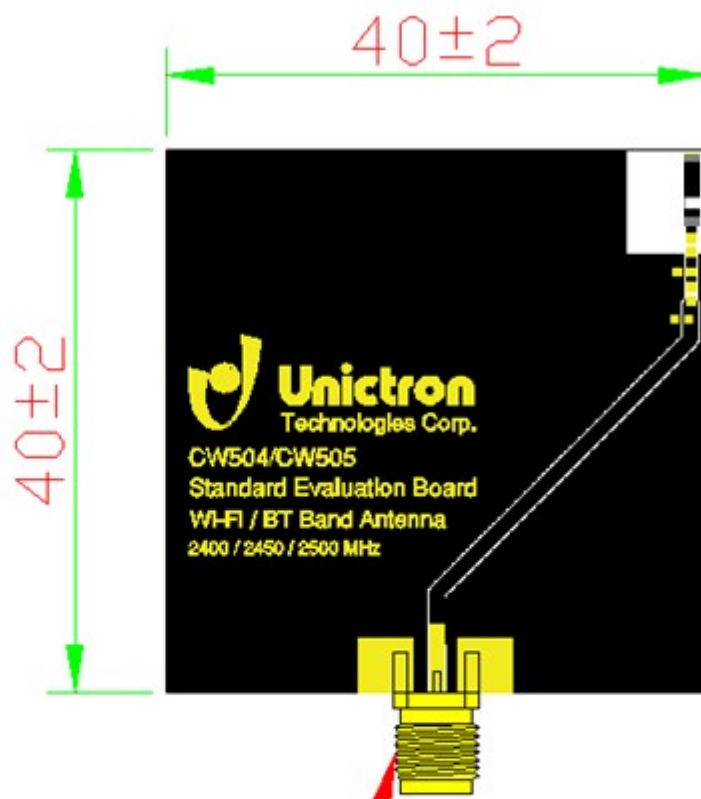

1/4"-36UNS-2A

Unit: mm



詠業科技股份有限公司
 Unictron Technologies Corporation
 Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia**

Designed by : **Peter**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : 5.0 x 1.0 x 1.3 WiFi / Bluetooth Chip Antenna (CW504) Engineering Specification





DOCUMENT NO.

H2U36F1K1B0100

REV. B

7. 3D Radiation Gain Pattern (with 40 x 40 mm² Evaluation Board)

7-1. 3D Radiation Gain Pattern @ 2442 MHz (unit: dBi)

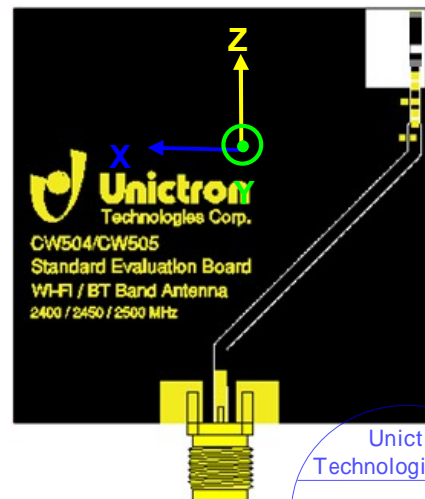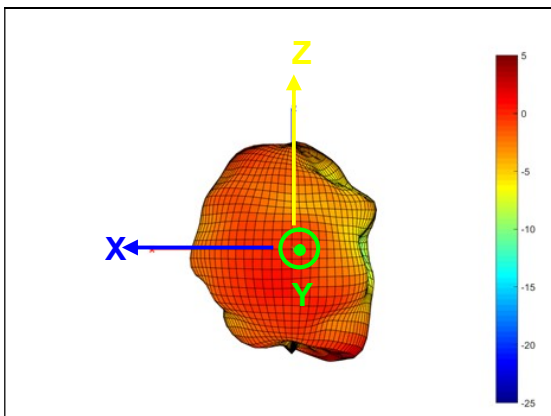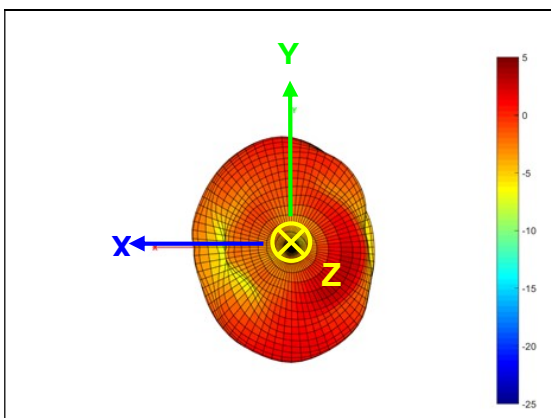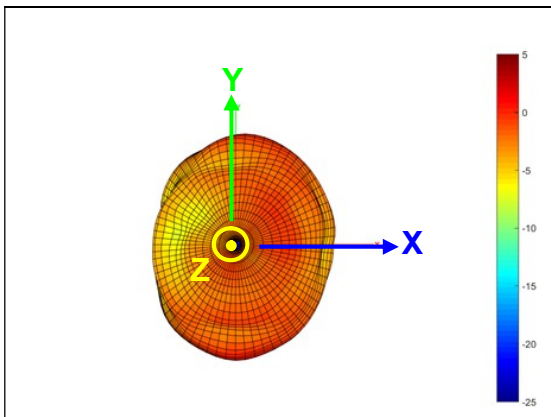

Unictron
Technologies Corp.
2019-01-16

Document
Control Center



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Peter

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 1.0 x 1.3 WiFi / Bluetooth Chip Antenna (CW504) Engineering Specification

DOCUMENT NO.


H2U36F1K1B0100

REV.

B


8. Frequency tuning and Matching circuit

8-1. Chip antenna tuning scenario :

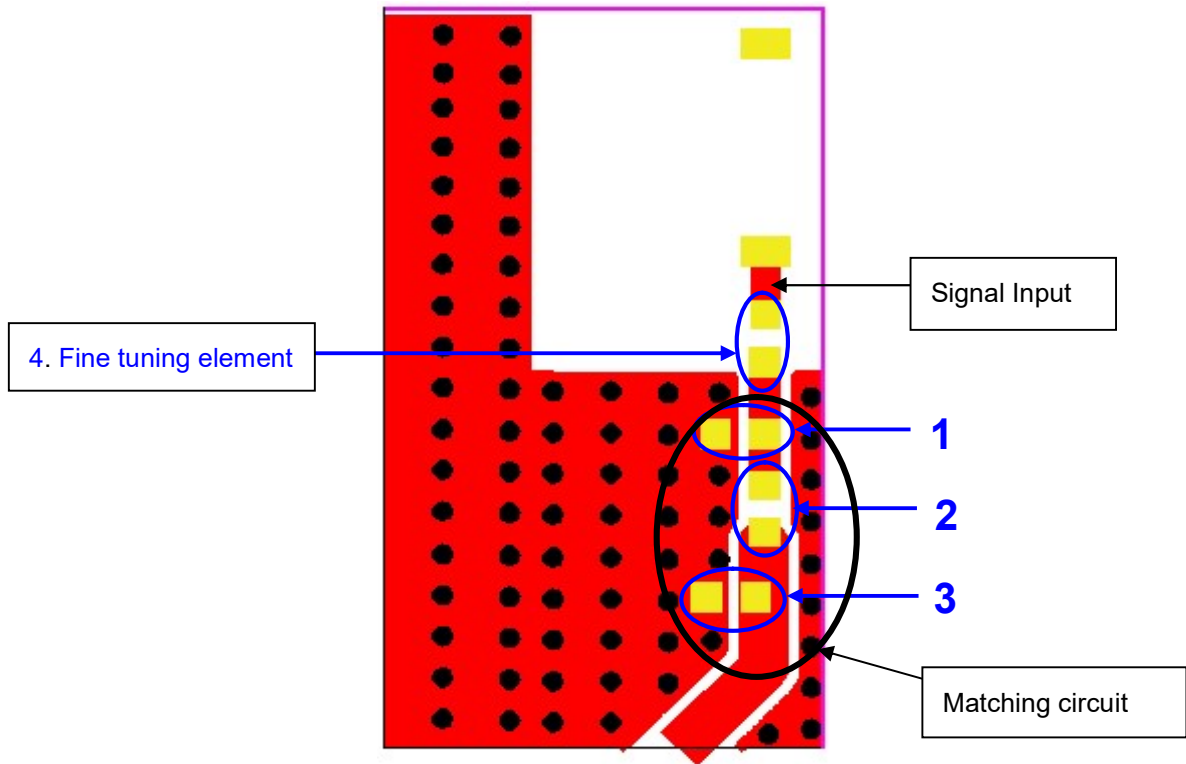

8-2. Matching circuit :

With the following recommended values of matching and tuning components, the center frequencies will be about 2442 MHz at our standard 40 x 40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

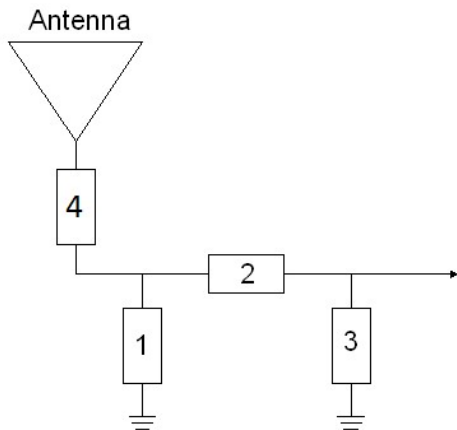

| System Matching Circuit Component | | | |
|-----------------------------------|--------------------------------------|--------|-----------|
| Location | Description | Vendor | Tolerance |
| 1 | N/A | - | - |
| 2 | 3.3nH, (0402) | MURATA | ±0.1nH |
| 3 | 1.2pF, (0402) | MURATA | ±0.05pF |
| 4 | Fine tuning element 3.3nH, (0402) | MURATA | ±0.1nH |

2019-01-16

Document
Control Center



詠業科技股份有限公司
Unictron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Peter

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 1.0 x 1.3 WiFi / Bluetooth Chip Antenna
(CW504) Engineering Specification


DOCUMENT
NO.

H2U36F1K1B0100

REV.
B

9. Soldering Conditions

Typical Soldering Profile for Lead-free Process

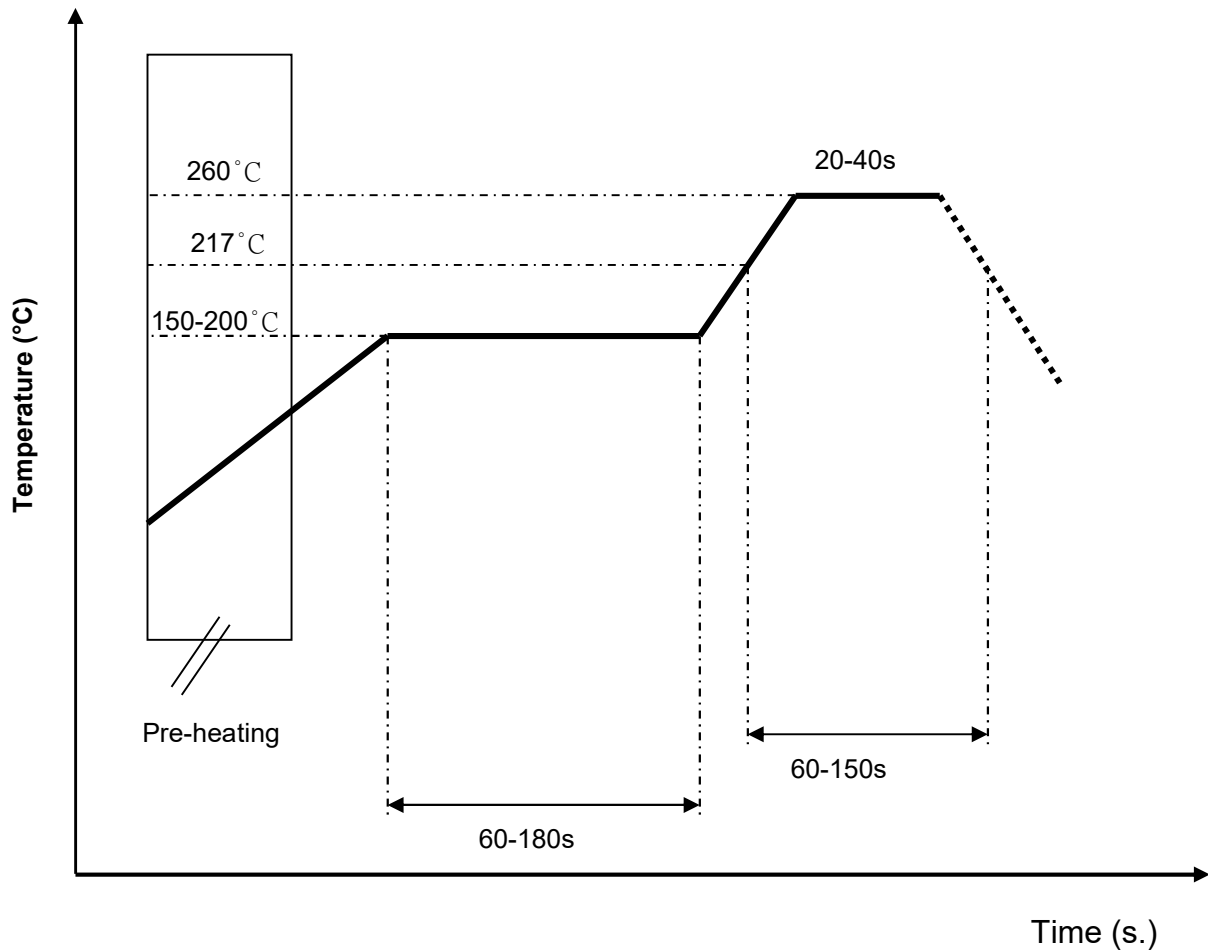

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Peter

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 1.0 x 1.3 WiFi / Bluetooth Chip Antenna
(CW504) Engineering Specification

DOCUMENT
NO.


H2U36F1K1B0100

REV.
B

11. Packing

- (1) Quantity/Reel: 2000 pcs/Reel
- (2) Plastic tape: Black conductive polystyrene

a. Tape Drawing

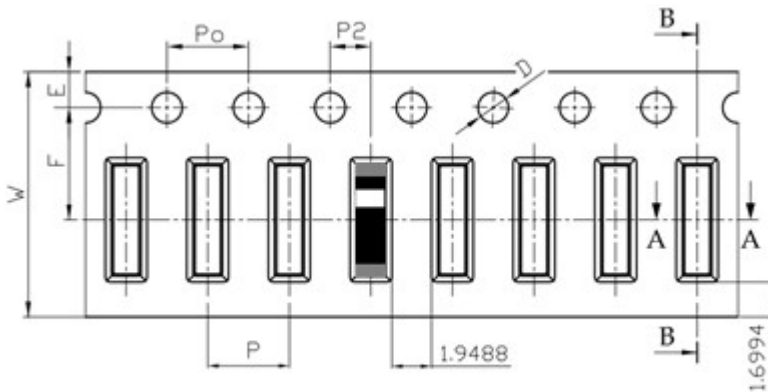

b. Tape Dimensions (unit: mm)

| Feature | Specifications | Tolerances |
|---------|----------------|----------------|
| W | 12.00 | ±0.30 |
| P | 4.00 | ±0.10 |
| E | 1.75 | ±0.10 |
| F | 5.50 | ±0.10 |
| P2 | 2.00 | ±0.10 |
| D | 1.50 | +0.10 -0.00 |
| Po | 4.00 | ±0.10 |
| 10Po | 40.00 | ±0.20 |

12. Operating & Storage Conditions

12-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C
- (3) Relative Humidity: 10% to 70%

12-2. Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

12-3. Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a

12-4. Storage (After mounted on customer's PCB with SMT process)

- (1) Storage Temperature: -40°C to 85°C
- (2) Relative Humidity: 10% to 70%



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Peter

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 1.0 x 1.3 WiFi / Bluetooth Chip Antenna (CW504) Engineering Specification

DOCUMENT NO.

H2U36F1K1B0100

REV.
B

13. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.



詠業科技股份有限公司
Unictron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia**

Designed by : **Peter**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : 5.0 x 1.0 x 1.3 WiFi / Bluetooth Chip Antenna (CW504) Engineering Specification

DOCUMENT NO.

H2U36F1K1B0100

REV. B