8.0 x 1.0 x 1.3 (mm) Wi-Fi/Bluetooth Chip Antenna (CW804) Engineering Specification

1. Product Number

H 2 U 3 6 G 2 K 1 B 0 1 0 0



2. Features

- *Stable and reliable in performances
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. Applications

- *ISM 2.4 GHz applications
- *ZigBee/BLE applications
- *Bluetooth earphone systems
- *Hand-held devices when WiFi / Bluetooth functions are needed, e.g., Smart phones
- *IEEE802.11 b/g/n
- *Wireless PCMCIA cards or USB dongles

4. Description

Unictron's CW804 chip antenna is designed for ISM 2.4GHz applications, covering frequencies 2400~2500MHz. Fabricated with proprietary design and processes, CW804 shows excellent performance and is fully compatible with SMT_h processes which can decrease the assembly cost and improve device's quality and consistency.

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 8.0 x 1.0 x 1.3(mm) Wi-Fi/Bluetooth Chip Antenna (CW804) Engineering Specification DOCUMENT NO.


H2U36G2K1B0100

5. Layout Guide & Electrical Specifications

5-1. Layout Guide (Unit: mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

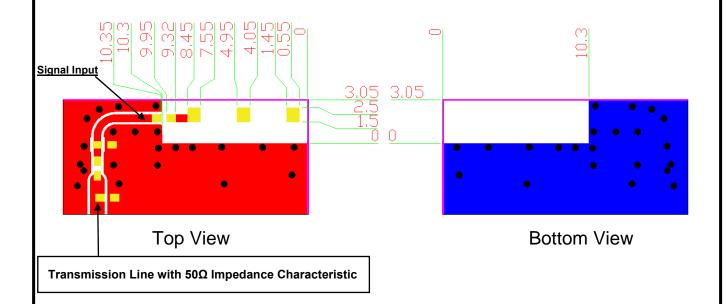

5-2. Electrical Specifications (Evaluation board dimensions: 50 x 40 mm²) 5-2-1. Electrical Table

Charact	teristics	Specifications	Unit
Outline Dimensio	ns	8.0 x 1.0 x 1.3	mm
Working Frequen	су	2400~ 2500	MHz
VSWR(@ center	frequency)*	2.0 Max.	
Characteristic Im	pedance	50	Ω
Polarization		Linear Polarization	
Peak Gain	(@2450 MU=)	0.9 (typical**)	dBi
Efficiency	(@2450 MHz)	60 (typical**)	%

^{*}Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.

**A trained value is fearefeared and the return loss of the chip antenna on the evaluation board.

Technologies Corp.

2017-09-11

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 8.0 x 1.0 x 1.3(mm) Wi-Fi/Bluetooth Chip Antenna (CW804) Engineering Specification


DOCUMENT NO.


H2U36G2K1B0100

^{**}A typical value is for reference only, not guaranteed.

5-2-2. Return Loss & VSWR Return Loss (S₁₁)

VSWR (S₁₁)

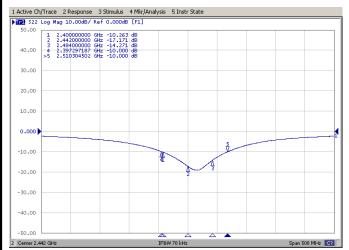

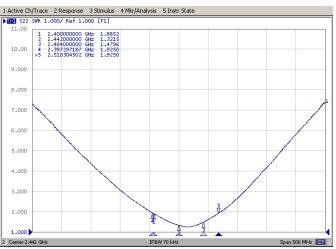

Unictron Technologies Corp.

2017-09-11

Document



詠業科技股份有限公司


Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 8.0 x 1.0 x 1.3(mm) Wi-Fi/Bluetooth Chip Antenna (CW804) Engineering Specification DOCUMENT NO.

H2U36G2K1B0100

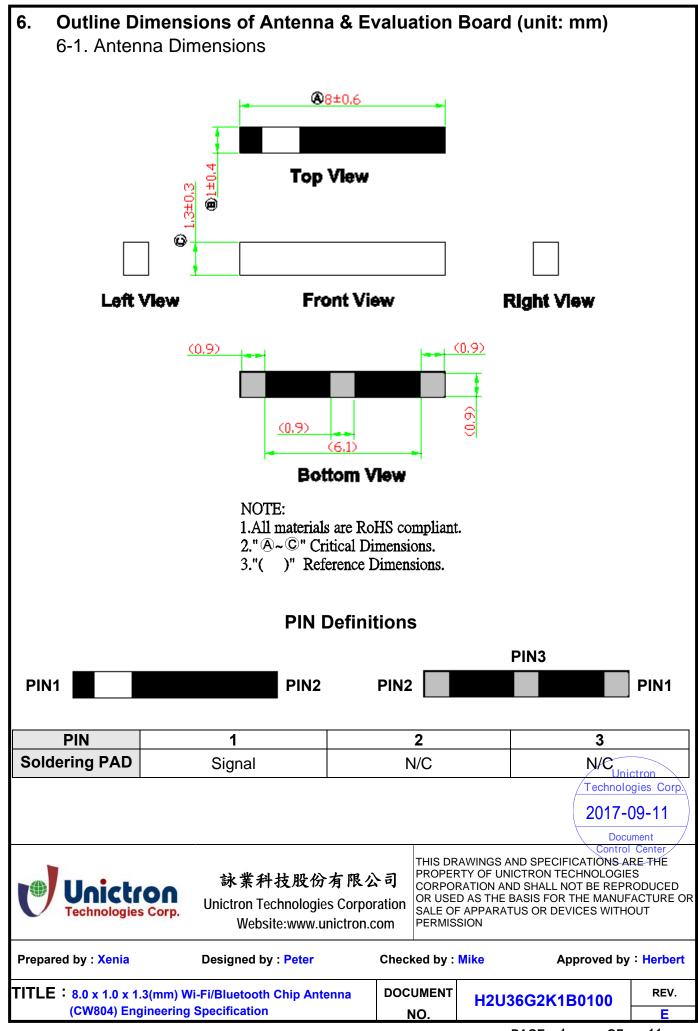


6-2. Evaluation Board with Antenna CW804/CW805 Standard Evaluation Board WI-FI/BT Band Chip Antenna 2400/2450/2500 MHz Unit: mm Unictron Technologies Corp. 2017-09-11 THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES 詠業科技股份有限公司 CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR **Unictron Technologies Corporation** SALE OF APPARATUS OR DEVICES WITHOUT Website:www.unictron.com **PERMISSION** Prepared by : Xenia Checked by : Mike Approved by : Herbert Designed by: Peter **DOCUMENT** TITLE: 8.0 x 1.0 x 1.3(mm) Wi-Fi/Bluetooth Chip Antenna REV. H2U36G2K1B0100


NO.


(CW804) Engineering Specification

7. 3D Radiation Gain Pattern (with 50 x 40 mm² Evaluation Board)

7-1. 3D Radiation Gain Pattern @ 2450 MHz (Unit: dBi)

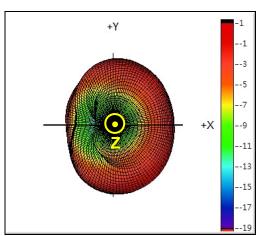

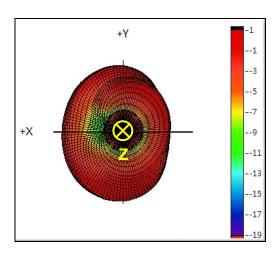

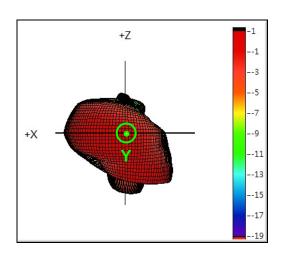





詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 8.0 x 1.0 x 1.3(mm) Wi-Fi/Bluetooth Chip Antenna


(CW804) Engineering Specification

DOCUMENT NO.

H2U36G2K1B0100

7-2. 3D Efficiency Table																
Frequency(MHz)	2400	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472	2484	2500
Efficiency(dB)	-2.7	-2.5	-2.4	-2.4	-2.3	-2.2	-2.2	-2.2	-2.3	-2.4	-2.5	-2.6	-2.6	-2.6	-2.7	-2.9
Efficiency(%)	53.4	56.3	57.3	57.4	59.2	59.7	60.5	60.7	58.8	56.9	56.7	55.3	54.7	55.4	53.7	51.8
Peak Gain(dBi)	0.4	0.6	0.7	0.7	0.9	0.9	0.9	0.9	8.0	8.0	0.7	0.6	0.7	0.6	0.5	0.4

7-3. 3D Efficiency vs. Frequency

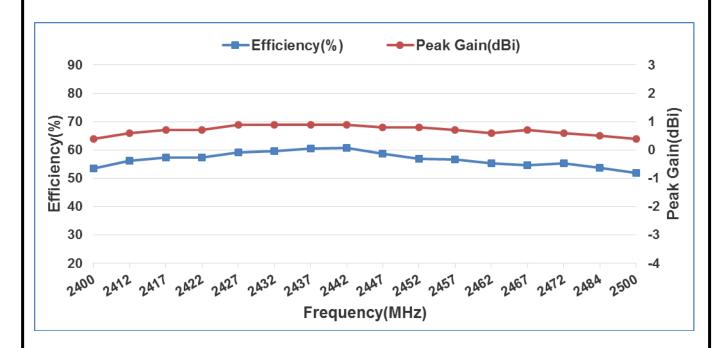

Unictron
Technologies Corp.

2017-09-11

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Prepared by : Xenia Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 8.0 x 1.0 x 1.3(mm) Wi-Fi/Bluetooth Chip Antenna (CW804) Engineering Specification DOCUMENT NO.

H2U36G2K1B0100


8. Frequency tuning and matching circuit

8-1. Chip antenna tuning scenario:

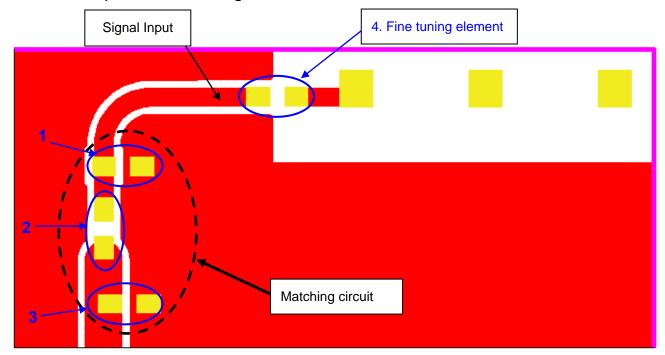

8-2. Matching circuit:

With the following recommended values of matching and tuning components, the center frequencies will be about 2442 MHz at our standard 50 x 40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

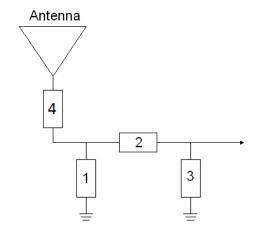

System Matching Circuit Component						
Location	Description	Vendor	Tolerance			
1	2.5 pF, (0402)	MURATA	±0.05 pF			
2	0Ω*	-	-			
3	0.4 pF, (0402)	MURATA	±0.05 pF			
4 Fine tuning element	3.9 nH, (0402)	MURATA	±0.1 nH			

Unictron
Technologies Corp.

2017-09-11

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Prepared by: Xenia Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 8.0 x 1.0 x 1.3(mm) Wi-Fi/Bluetooth Chip Antenna (CW804) Engineering Specification DOCUMENT NO.

H2U36G2K1B0100

9. Soldering Conditions

Typical Soldering Profile for Lead-free Process

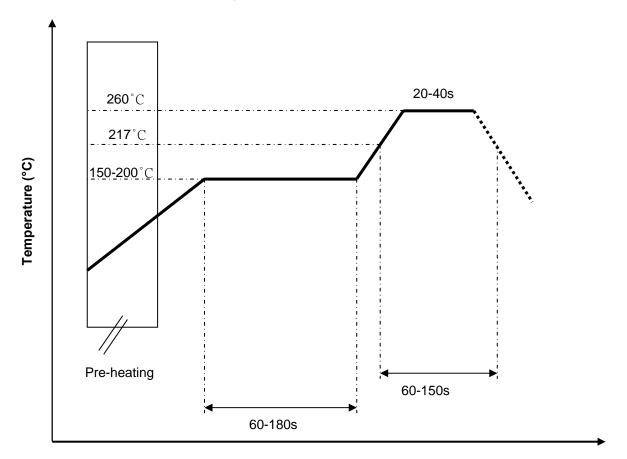

Time

Unictron
Technologies Corp.

2017-09-11

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Peter Checked by : Mike Approved by : Herbert


TITLE: 8.0 x 1.0 x 1.3(mm) Wi-Fi/Bluetooth Chip Antenna (CW804) Engineering Specification

DOCUMENT NO.

H2U36G2K1B0100

10. Packing

- (1) Quantity/Reel: 2000pcs/Reel
- (2) Plastic tape: Black Conductive Polystyrene.
 - a. Tape Drawing

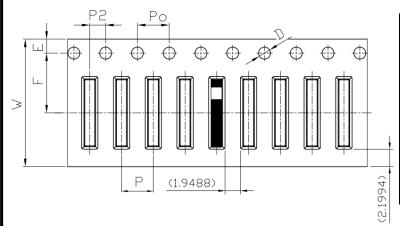

b. Tape Dimensions (unit: mm)

Specifications	Tolerances			
16.00	±0.30			
4.00	±0.10			
1.75	±0.10			
7.50	±0.10			
2.00	±0.10			
1.50	+0.10			
1.50	-0.00			
4.00	±0.10			
40.00	±0.20			
	16.00 4.00 1.75 7.50 2.00 1.50 4.00			

11. Operating & Storage Conditions

11-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40° C to 85° C
- (3) Relative Humidity: 10% to 70%

11-2. Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

11-3. Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a

11-4. Storage (After mounted on customer's PCB with SMT process)

(1) Storage Temperature: -40°C to 85°C

(2) Relative Humidity: 10% to 70%

Unictron Technologies Corp.

2017-09-11

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 8.0 x 1.0 x 1.3(mm) Wi-Fi/Bluetooth Chip Antenna (CW804) Engineering Specification DOCUMENT NO.

H2U36G2K1B0100

12. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.

Unictron Technologies Corp.

2017-09-11

Document Control Cent



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 8.0 x 1.0 x 1.3(mm) Wi-Fi/Bluetooth Chip Antenna (CW804) Engineering Specification

DOCUMENT NO.

H2U36G2K1B0100