
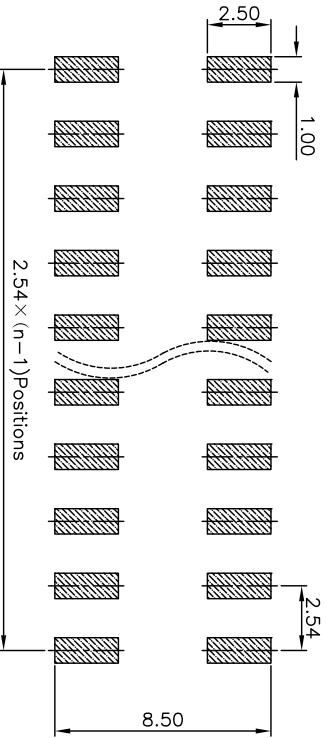
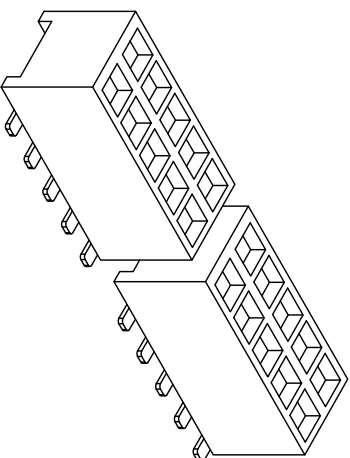

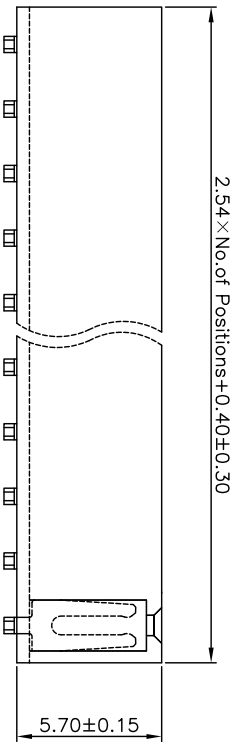


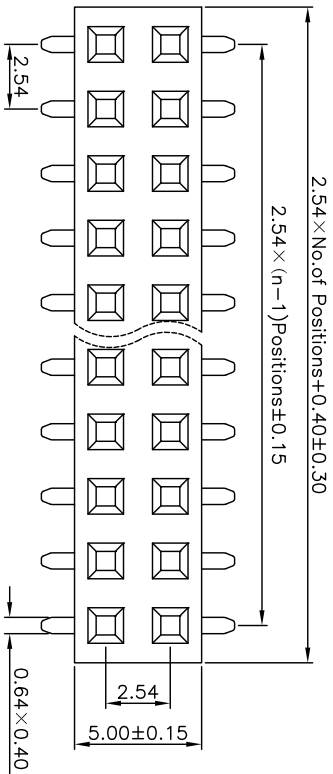

P.C.B LAYOUT

### SPECIFICATIONS

Rated Current : 3.0AMP  
Contact Resistance : 20mΩ Max  
Withstand Voltage : 500V AC/DC  
Insulation Resistance : 1000MΩ Min  
Operation Temperature : -40°C to +108°C

Contact Material : Brass  
Contact Plating : Au or Sn Over Ni  
Insulator Material : Polyester(UL94V-0)  
Standard : PA6T  
Max Processing Temp : 230°C for 5-10 seconds

|                            |                    |       |                                          |
|----------------------------|--------------------|-------|------------------------------------------|
| MODEL: F2.54S-5.7×5.0-2×nP | DRAWN BY : Leiqin  | DATE: | GENERAL TOLERANCE:<br>(UNLESS SPECIFIED) |
| TITLE : 2.54间距5.7高双排贴片排母   | CHECKED BY : Liwei | DATE: | X. ±0.30mm X.* ± 3°                      |
| DRAWING NO:                | REV. : A           | DATE: | X.X ±0.25mm X.X* ± 2°                    |
| SHEET: 1 OF 1              | SCALE: 3:1         | DATE: | X.XX ±0.20mm X.XX* ± 1°                  |
|                            | SIZE: A4           | DATE: | X.XXX±0.10mm X.XXX ± 0.5°                |
|                            | UNIT : mm          | DATE: |                                          |



**深圳市吉威电子有限公司**  
SZJUSTWELL ELECTRONICS CO., LTD

MEASURE POINT:  
QUADRANT POINT (QB)  
TANGENCY POINT (TP)  
INTERSECTION POINT (IP)

|           |            |    |      |
|-----------|------------|----|------|
| NO:       | PARTICULAR | BY | DATE |
| REVISIONS |            |    |      |