



- NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. GENERAL TOLERANCE:±0.2mm
3. MATERIAL: Δ BASB:UL94V-0 PBT Theanoplastic(Black)
Δ COVER:UL94V-0 PBT Theanoplastic(Red,Black,Blue)
Δ ACTUATORS:UL94V-0 PBT Theanoplastic(White)
Δ CONTACT PLATING:Gold plating oven nickel
Δ PITTING MATERIAL:Epoxxy

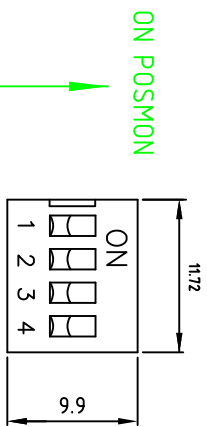


ON POSITION



P.C.B. LAYOUT

MOUNTING SURFACE

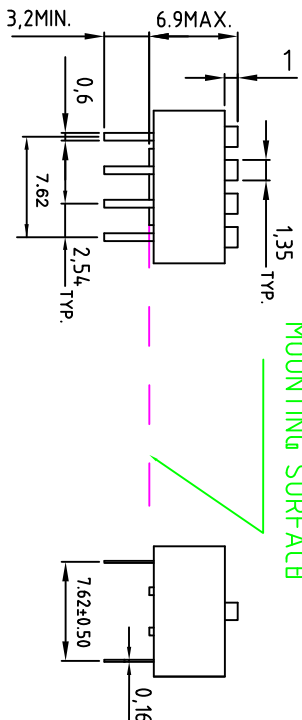

- Δ ELECTRICAL
- Electrical:2000 operations per switch-
24 VDC,25mA.
- Non-Switching Rating:100mA,50VDC.
- Switching Rating:25mA,24VDC.
- Contact Resistance:50mΩ max. at initial.

Δ MECHANICAL

- Mechanical life: 2000 operations per switch.
- Stroke: 2.0mm.
- Operation Temp: -25℃ to 70℃
- Storage Temp: -40℃ to 85℃.

深圳市威尔杰电子有限公司

△		
△		
标记	更改事由	签名 日期

产品名称				DS-04		版本	本	比例	FIT
产品编号						绘图		日期	
未标明公差尺寸				±0.20		审核		日期	