


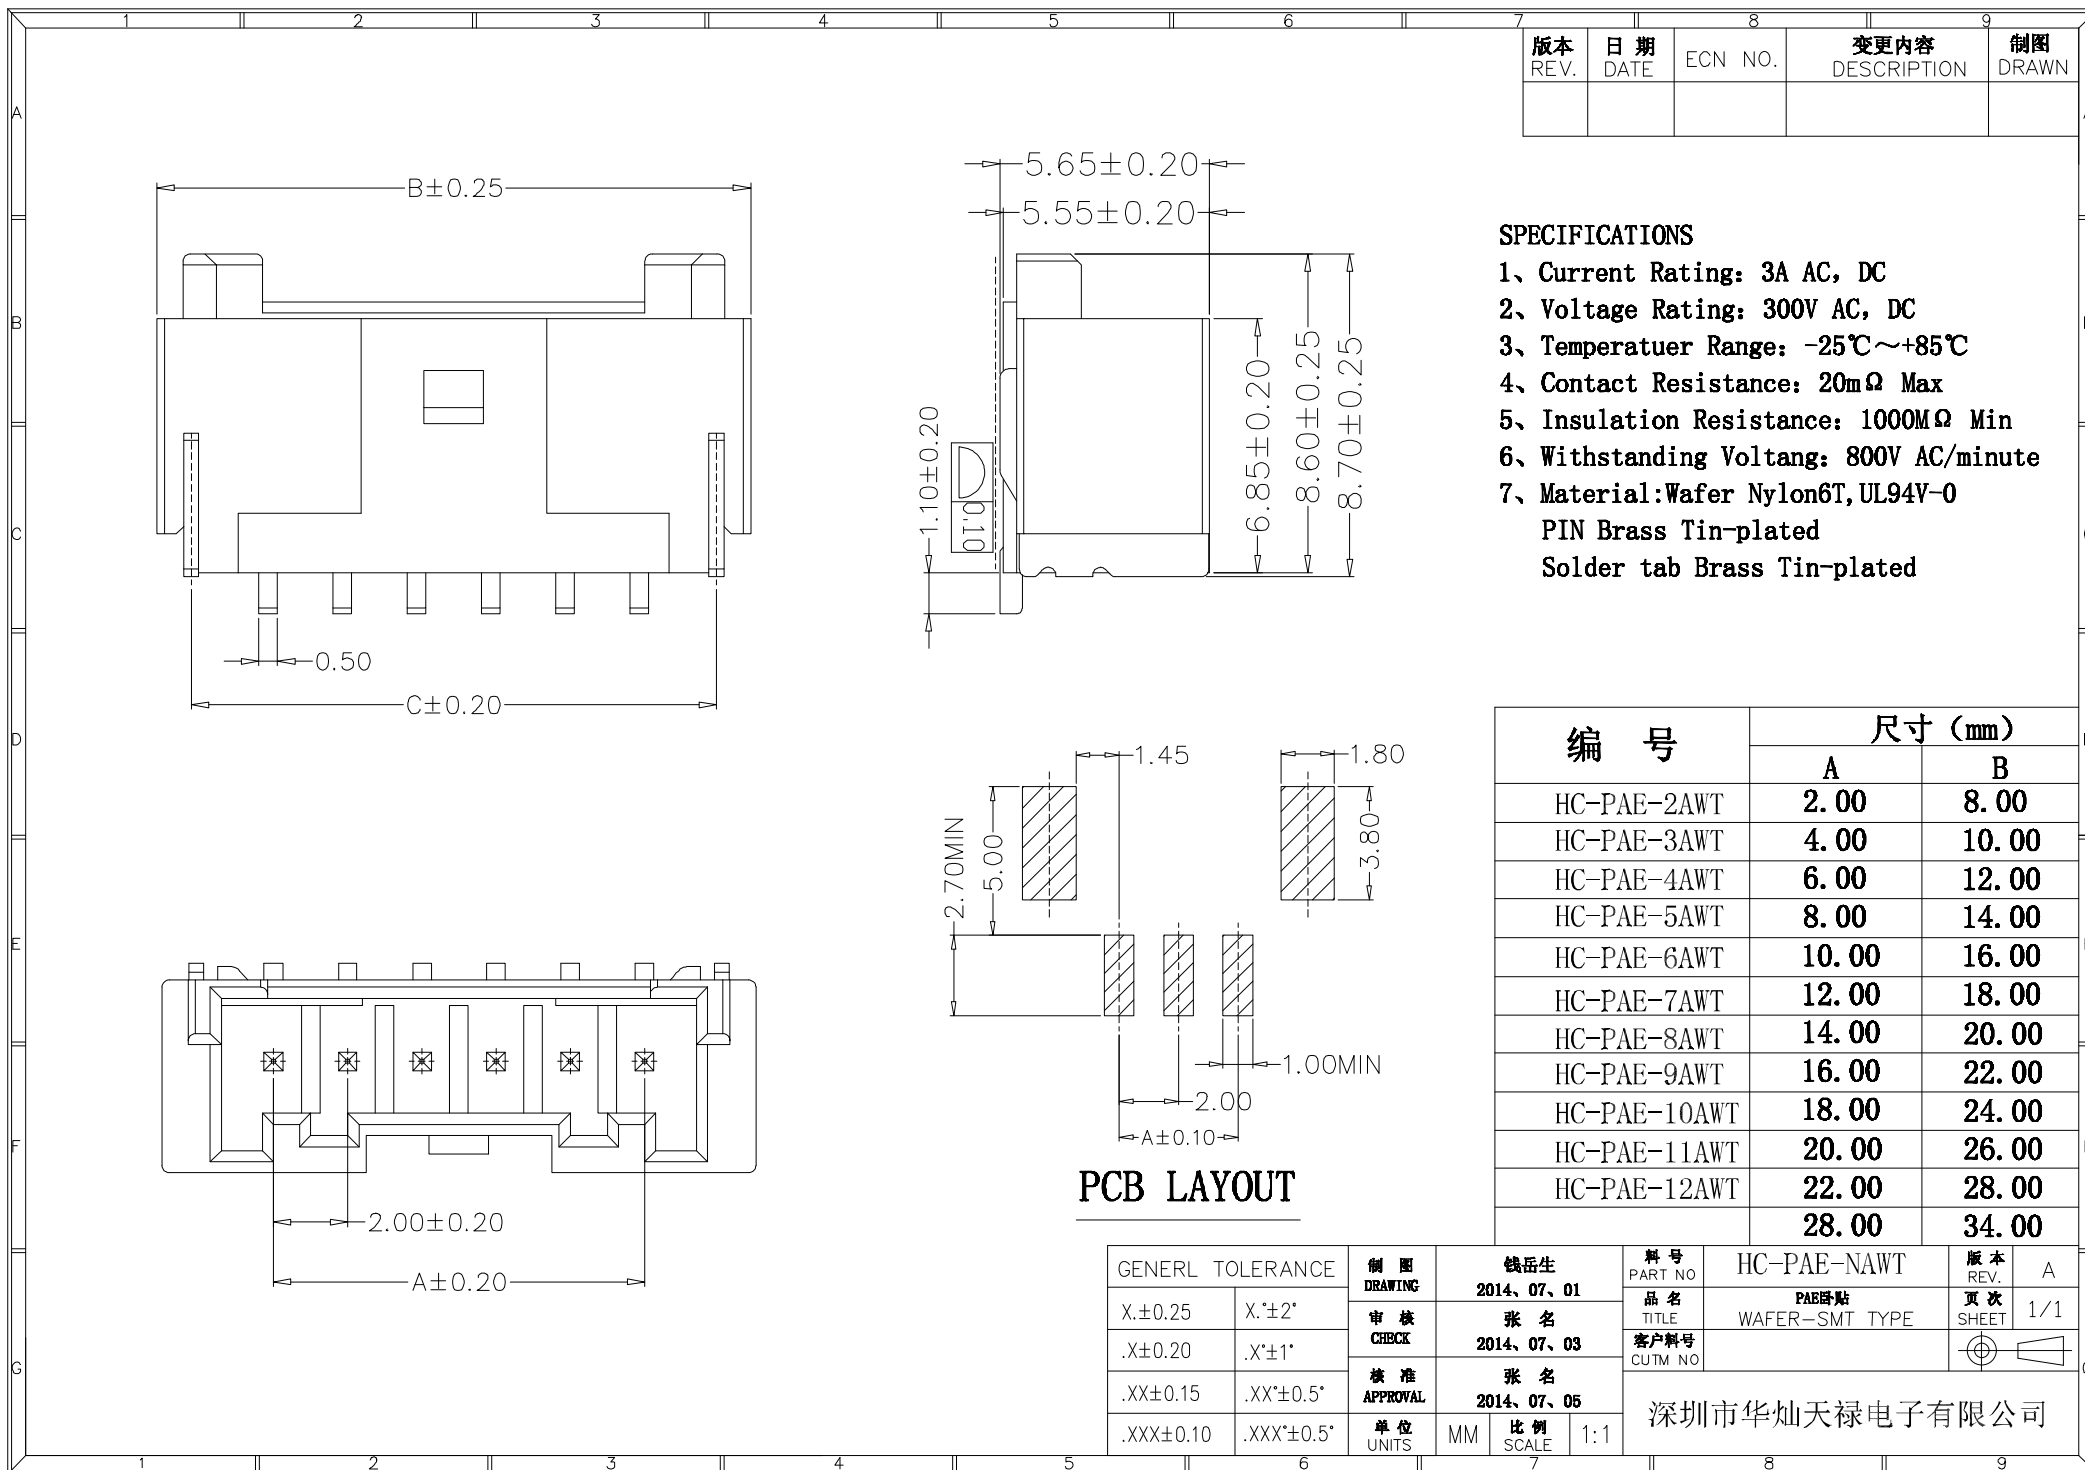

版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 300V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material:Wafer Nylon6T, UL94V-0
PIN Brass Tin-plated
Solder tab Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HC-PAE-2AWT	2.00	8.00
HC-PAE-3AWT	4.00	10.00
HC-PAE-4AWT	6.00	12.00
HC-PAE-5AWT	8.00	14.00
HC-PAE-6AWT	10.00	16.00
HC-PAE-7AWT	12.00	18.00
HC-PAE-8AWT	14.00	20.00
HC-PAE-9AWT	16.00	22.00
HC-PAE-10AWT	18.00	24.00
HC-PAE-11AWT	20.00	26.00
HC-PAE-12AWT	22.00	28.00
	28.00	34.00

PCB LAYOUT

GENERAL TOLERANCE		制 图 DRAWING	钱岳生 2014、07、01		料 号 PART NO	HC-PAE-NAWT		版 本 REV.	A
X.±0.25	X.±2°		审 核 CHECK	张 名 2014、07、03		品 名 TITLE	PAE贴片 WAFER-SMT TYPE		页 次 SHEET
.X±0.20	.X±1°	核 准 APPROVAL		张 名 2014、07、05		客 户 料 号 CUTM NO			
.XX±0.15	.XX±0.5°				深圳市华灿天禄电子有限公司				
.XXX±0.10	.XXX±0.5°	单 位 UNITS	MM	比 例 SCALE				1:1	