




SMB/DO-214AA

Features

- ◇ For surface mounted application
- ◇ Easy pick and place
- ◇ Metal to silicon rectifier, majority carrier conduction
- ◇ Low power loss, high efficiency
- ◇ High current capability, low VF
- ◇ High surge current capability
- ◇ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ◇ Epitaxial construction
- ◇ High temperature soldering:
260°C / 10 seconds at terminals

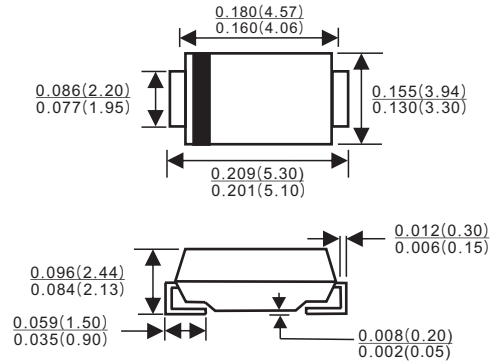

Mechanical Data

- ◇ Case: JEDEC SMB/DO-214AA Molded plastic
- ◇ Terminals: Pure tin plated, lead free
- ◇ Polarity: Indicated by cathode band
- ◇ Weight: 0.064 gram

Dimensions in inches and(millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SS 32B	SS 33B	SS 34B	SS 35B	SS 36B	SS 39B	SS 310B	SS 315B	SS 320B	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	90	100	150	200	V	
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	63	70	105	150	V	
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	90	100	150	200	V	
Maximum Average Forward Rectified Current at T_L (See Fig. 1)	$I_{(AV)}$	3.0									A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	100									A	
Maximum Instantaneous Forward Voltage (Note 1) IF= 3.0A @ 25°C @ 100°C	V_F	0.5 0.4		0.75 0.65		0.85 0.70		0.95 0.80		V		
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	I_R	0.5					0.1					mA mA
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$ $R_{\theta JA}$	28 88										°C/W
Operating Temperature Range	T_J	-55 to +150									°C	
Storage Temperature Range	T_{STG}	-55 to +150									°C	

Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle



LGE

SS32B - SS320B

3.0 AMPS. Surface Mount Schottky Barrier Rectifiers



RATINGS AND CHARACTERISTIC CURVES (SS32B THRU SS315B)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

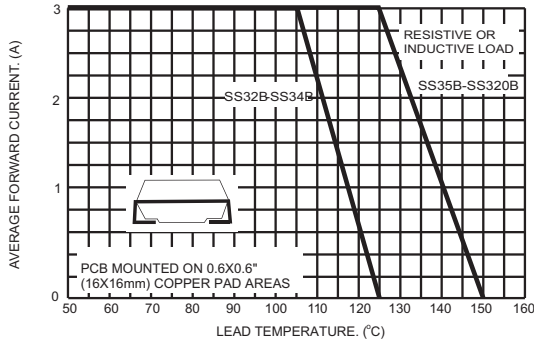


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

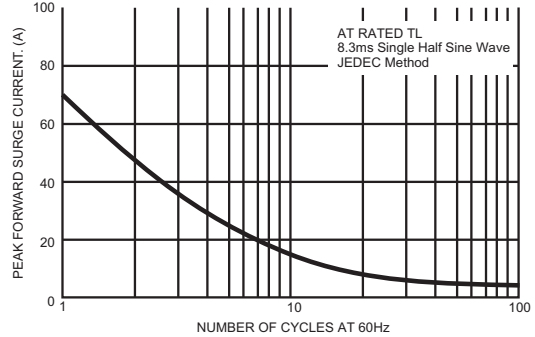


FIG.3- TYPICAL FORWARD CHARACTERISTICS

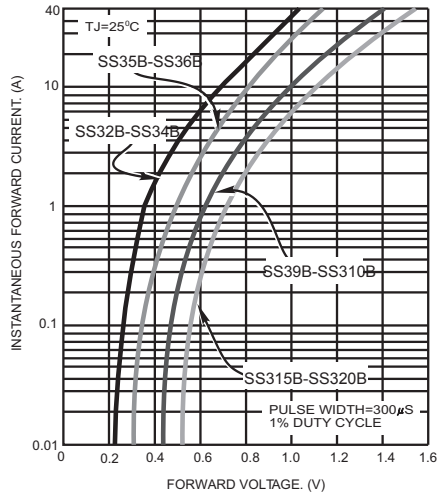


FIG.4- TYPICAL REVERSE CHARACTERISTICS

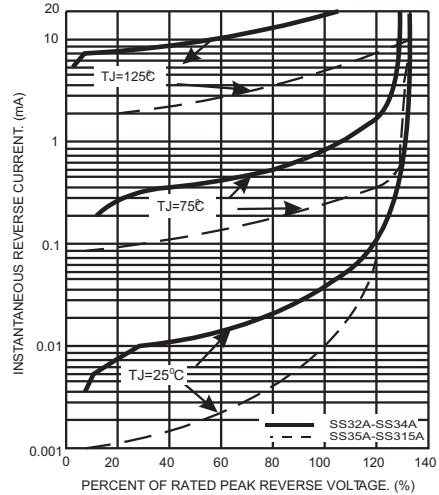


FIG.5- TYPICAL JUNCTION CAPACITANCE


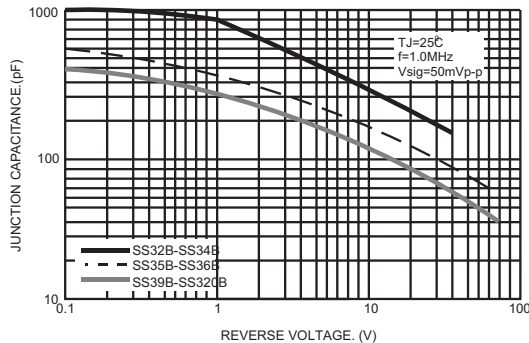


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

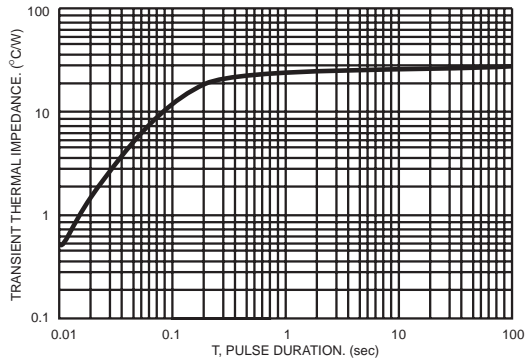

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
SMB	3000/REEL	48000	36X35.8X36.5	12.00	11.00