

Surface Mount Polymer ESD Suppressors

Low Capacitance

PE0402S12G01R

Description


This specification is applied to electrostatic discharge (ESD) protection. It is designed to protect the high-speed data lines against ESD transients. It has very low capacitance and fast turn on times makes it ideal for data and transmission lines with high data rates. According to the special property of device, we recommend not to use on such application as DC/AC power line.

Features


- ◆ RoHS compliant, lead-free and available halogen-free
- ◆ Protection against ESD voltages and currents (IEC 61000-4-2 Level 4)
- ◆ Extremely quick response time (<1 ns) present ideal ESD protection
- ◆ Extremely low capacitance
- ◆ Extremely low leakage current
- ◆ Bi-directional device
- ◆ Surface mount device
- ◆ Zero signal distortion

Applications

- ◆ Antenna circuit
- ◆ USB2.0 / USB3.0
- ◆ IEEE-1394
- ◆ DVI
- ◆ HDMI

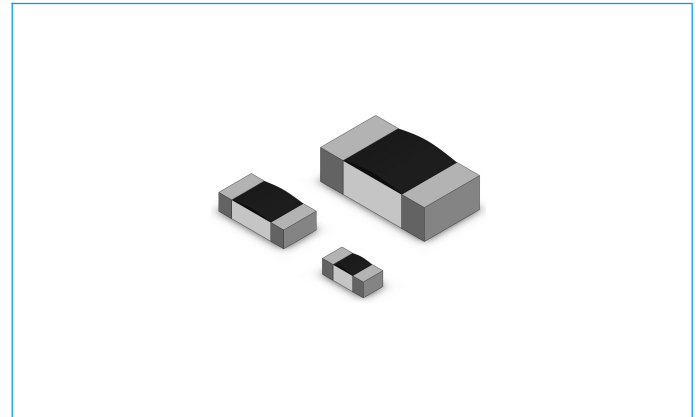

Equivalent Circuits

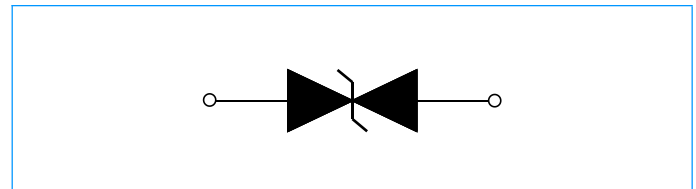

Product Model

- ◆ Digital Video Equipment
- ◆ Mobil Phone
- ◆ GPS Antenna
- ◆ Bluetooth Communication Equipment

Electrical Characteristics

Characteristic	Symbol	Unit	Min.	Typical.	Max.
Rated voltage	V_{DC}	V	—	—	12.0
Leakage current	I_L	μA	—	0.01	—
Peak voltage	V_P	V	—	300	—
Trigger voltage	V_T	V	—	300	—
Clamping voltage	V_C	V	—	30	—
Capacitance,@1MHz	C_P	pF	—	0.2	0.5
Response time	—	ns	—	—	1
ESD voltage capability,Contact discharge mode	—	KV	—	8	—
ESD voltage capability,Air discharge mode	—	KV	—	15	—
ESD pulse withstand	—	pulses	—	1000	—

Rated voltage- I_L measurement rated voltage

V_P - The Peak voltage value shall be measured under the following conditions. ESD test conditions:IEC61000-4-2, 8KV contact discharge

V_T - Measurement by using Transmission Line Pulse (TLP)

V_C - Measurement by using Transmission Line Pulse (TLP)

C_P - Device Capacitance measured with 1Vrms

Surface Mount Polymer ESD Suppressors


Low Capacitance

PE0402S12G01R

Construction & Dimensions Unit: mm

Substrate	Ceramic (Alumina)
Encapsulate	Polymer
End termination	Ag / Ni / Sn

Symbol	0402
L	1.00±0.10
W	0.50±0.10
H	0.34±0.10
B	0.20±0.15
A	0.50±0.10
C	0.50±0.10
D	0.50±0.10

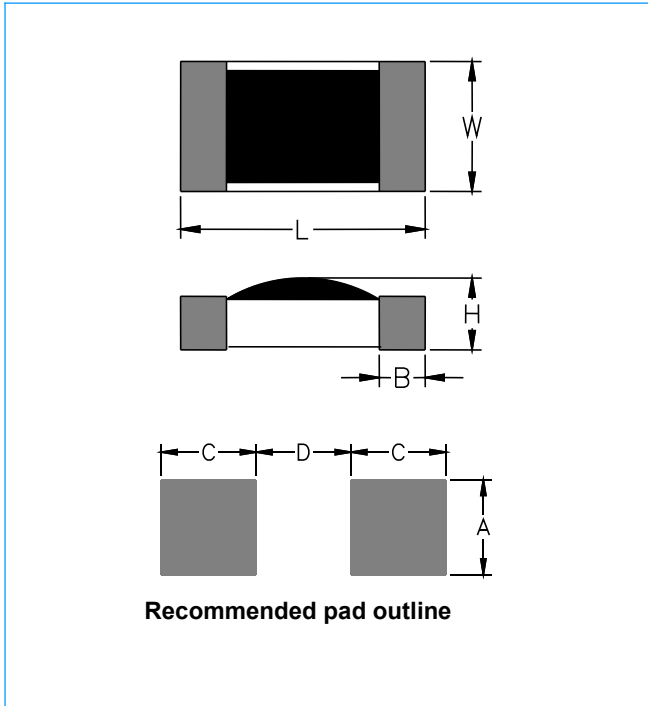

Environmental Specifications

Item	Specifications	Test Condition	Reference
Bias Humidity	$I_L \leq 10\mu A$	90%RH, 40°C, Rated Voltage, 1000hrs	MIL-STD-202 Method 103
Thermal Shock	$I_L \leq 10\mu A$	-40°C to +85°C, 30 min. cycle, 5 cycles	JIS C0025 (1998) Test Na
High Temperature	$I_L \leq 10\mu A$	Rated Voltage, 85°C, 1000hrs	MIL-STD-202G Method 108
Solder leach Resistance	$I_L \leq 10\mu A$	260°C, 10s	MIL-STD-202G Method 210F

I_L - Leakage current at rated voltage, the maximum leakage current was measured after reliability test.

Temperature Specifications


Parameter		Value	Unit
Operating Temperature		-55 to +125	°C
Storage Temperature		-55 to +125	°C
Taping Package Storage Condition	Storage Temperature	5 to 40	°C
	Relative Humidity	<65	%RH
	Storage Time	12 Max	Month

Surface Mount Polymer ESD Suppressors

Low Capacitance

PE0402S12G01R

Construction & Dimensions Unit: mm

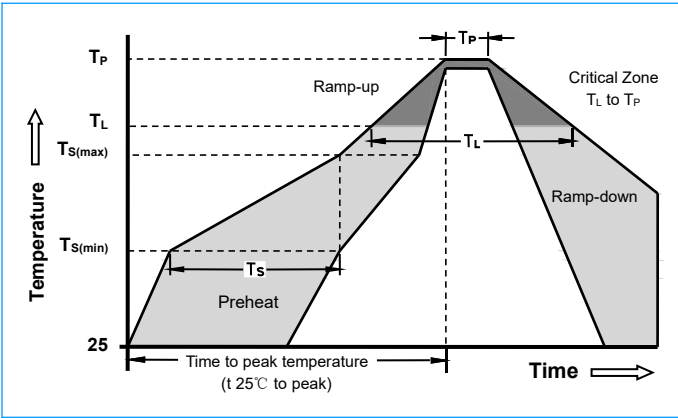

Precaution for soldering

Note that this product will be easily damaged by rapid heating, rapid cooling or local heating. Do not give heat shock over 100°C in the process of soldering. We recommend to take preheating and gradual cooling

Soldering gun procedure


- Note the follows, in case of using solder gun for replacement.
- 1) The tip temperature must be less than 280 for the period within 3 seconds by using soldering gun under 30W
- 2) The soldering gun tip shall not touch this product directly.

Soldering volume

Note that excess of soldering volume will easily get crack the body of this product.

Packaging Information

Carrier Tape Dimensions Unit: mm

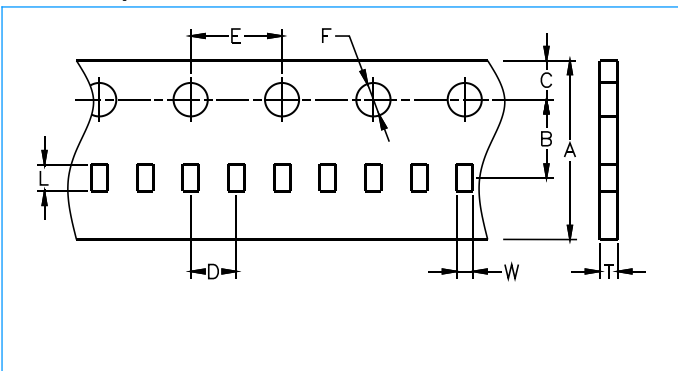

Packaging method

- Products shall be heat-sealed in the chip pocket, spacing pitch 2-mm of paper carrier tape with cover tape, and carrier

Reflow Condition		Pb free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max ($T_{s(max)}$)	+200°C
	-Time (min to max) (T_s)	60 -180 Seconds
Average ramp up rate (Liquidus Temp T_L) to peak		3°C/Second Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/Second Max
Reflow	- Temperature (T_L) (Liquidus)	+217°C
	- Time (min to max) (T_L)	60 -150 Seconds
Peak Temperature (T_P)		260 +0/-5°C
Time within 5°C of actual peak Temperature (T_P)		20-40 Seconds
Ramp-down Rate		6°C/Second Max
Time 25°C to peak Temperature (T_P)		8 minutes Max


Symbol	0402
A	8.00±0.30
B	3.50±0.05
C	1.75±0.10
D	2.00±0.05
E	4.00±0.10
F	1.50±0.10
L	1.19±0.05
W	0.69±0.05
T	0.48±0.03

Surface Mount Polymer ESD Suppressors

Low Capacitance

PE0402S12G01R

Taping Reel Dimensions

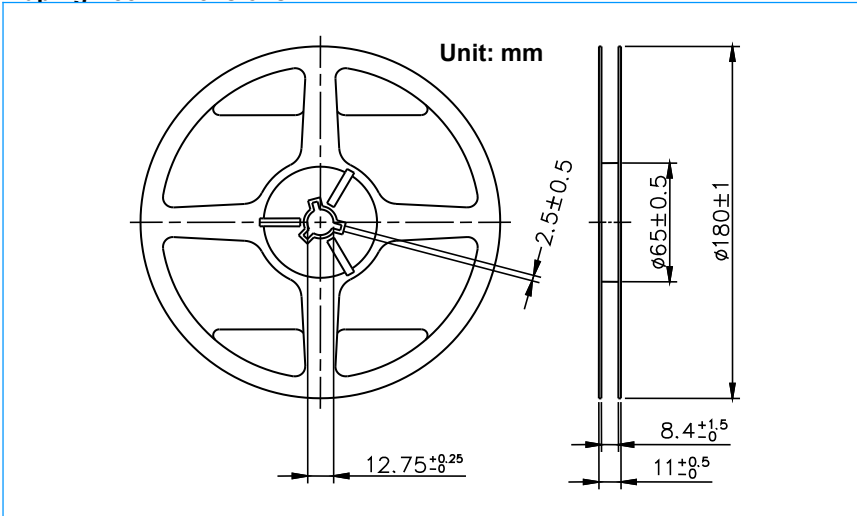

Taping Specifications

There shall be the portion having no product in both the head and the end of taping, and there shall be the cover tape in the heat of taping.

Quantity of products in the taping package

Standard Quantity	0402	10000PCS / Reel
Shipping quantity is a multiple of standard quantity		