


MATERIAL:
 Housing : PBT UL94V-0 Beige
 Contacts: Copper Alloy
 Lock: Phosphor Bronze

ELECTRICAL CHARACTERISTICS:
 Current Rating: 2 AMP
 Dielectric Withstanding Voltage: AC1000V for 1minute
 Insulator Resistance: 1000MΩ min at DC 500V
 Contact Resistance: 20mΩ max at DC 100mA
 Operating Temperature: -55°C ~ +125°C

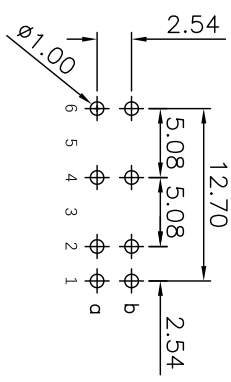

P.C.B LAYOUT

MODEL: 9001-35080C00A	DRAWN BY : Leiqin	DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED) X. ±0.30mm X.* ± 3* X.X ±0.25mm X.X* ± 2* X.XX ±0.20mm X.XX* ± 1* X.XXX±0.10mm X.XXX ± 0.5*
TITLE : 2.54弯公胶芯+直针欧式连接器	CHECKED BY : Liwei	DATE:	
DRAWING NO:	REV. : A	APPROVED BY: Wuxin	
SHEET: 1 OF 1	SCALE: 3:1	SIZE: A4 UNIT : mm	

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	20	a b	
	10	a -	

深圳市吉威电子有限公司
 SZJUSTWELL ELECTRONICS CO., LTD

SZJUSTWELL

MEASURE POINT:
 QUADRANT POINT
 TANGENCY POINT
 INTERSECTION POINT

NO:	PARTICULAR	BY	DATE
REVISIONS			