



MATERIAL:
 Housing : PBT UL94V-0 Beige
 Contacts: Copper Alloy

ELECTRICAL CHARACTERISTICS:
 Current Rating: 2 AMP
 Dielectric Withstanding Voltage:
 AC1000V for 1minute
 Insulator Resistance: 1000MΩ min at DC 500V
 Contact Resistance: 20mΩ max at DC 100mA
 Operating Temperature: -55°C ~ +125°C

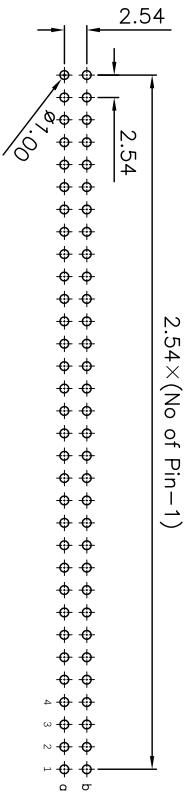

P.C.B LAYOUT

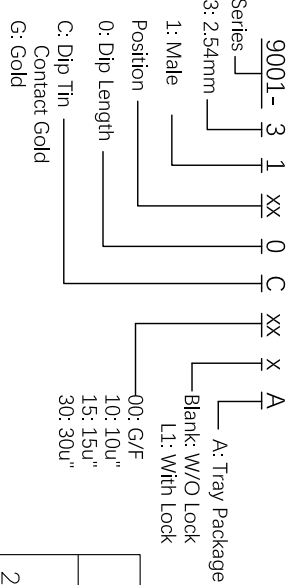

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	64	a b	
	32	a -	

MODEL: 9001-31XX0CXXA	DRAWN BY : Leiqin	DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED)
TITLE : 2.54mm公版芯+直针欧式连接器	CHECKED BY : Liwei	DATE:	X. ±0.30mm X.* ± 3*
DRAWING NO:	REV. : A	DATE:	X.X ±0.25mm X.X* ± 2*
SHEET: 1 OF 1	SCALE: 3:1	DATE:	X.XX ±0.20mm X.XX* ± 1*
	SIZE: A4	DATE:	X.XXX±0.10mm X.XXX ± 0.5*

深圳市吉威电子有限公司
 SZJUSTWELL ELECTRONICS CO., LTD

MEASURE POINT:
 QUADRANT POINT
 TANGENCY POINT
 INTERSECTION POINT

NO: PARTICULAR BY DATE
 REVISIONS