

LQW15CNR82M10#

“ # ” indicates a package specification code.

New

In Production

General

125℃

Wound
(No Shield)


Reflow
OK

RoHS

REACH

< List of part numbers with package codes >
LQW15CNR82M10D , LQW15CNR82M10B

Shape

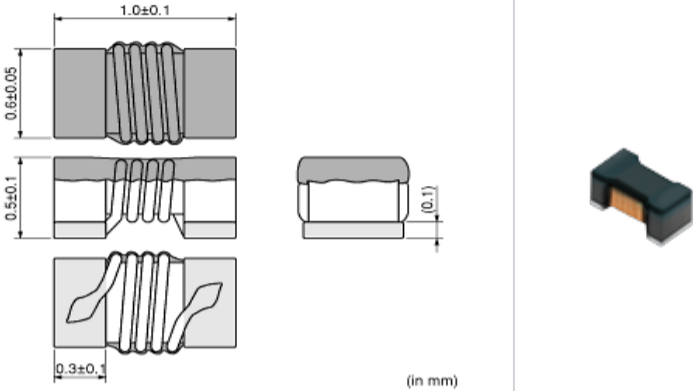

(in mm)

L size	1.0 ± 0.1mm
W size	0.6 ± 0.05mm
T size	0.5 ± 0.1mm
Size code in inch (mm)	0402 (1005)

Notes

In operating temperature exceeding +85℃, derating of current is necessary for LQW15C series.
Please apply the derating curve shown in chart according to the operating temperature.
Please confirm the below "Notice (Rating)".

References

Packaging code	Specifications	Minimum quantity
D	180mm Paper taping	10000
B	Packing in bulk	500

Mass (Typ.)	
1 piece	0.001g


Specifications

Inductance	820nH ± 20%
Inductance test frequency	1MHz
Rated current (Itemp) (Based on Temperature rise)	275mA
Max. of DC resistance	0.84
Self resonance frequency (min.)	200MHz
Operating temperature range (Self-temperature rise is not included)	-55 ~ 125
Class of magnetic shield	No magnetic shield


⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

Inductance-Frequency characteristics (Typ.)

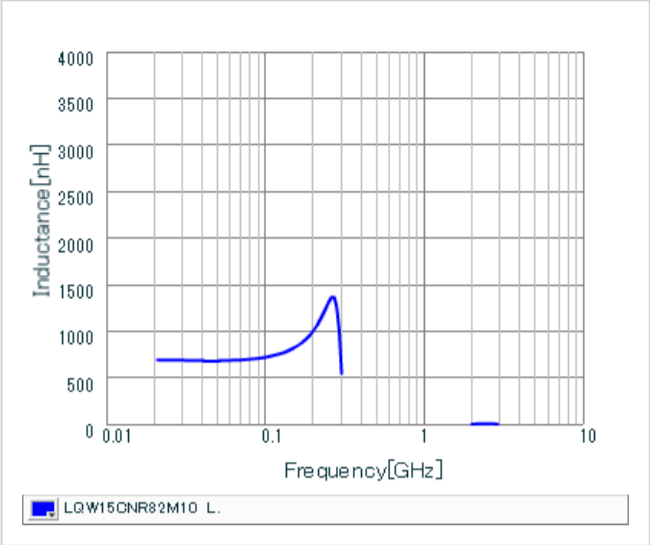

Q-Frequency characteristics (Typ.)

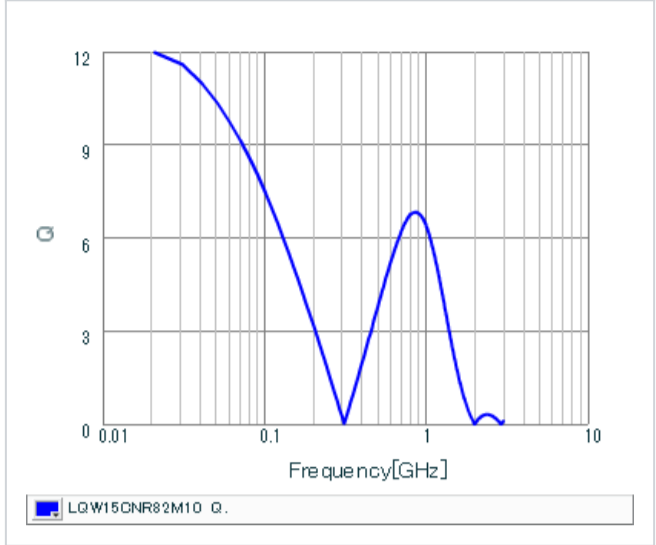

Notice (Rating)

In operating temperature exceeding +85°C, derating of current is necessary for LQW15C series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

