
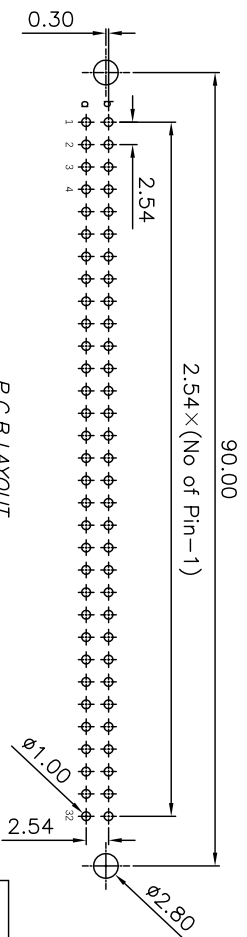



- 9001- 3 2 XX 1 C XX X A**
- Series: 3: 2.54mm
 - 2: Female
 - Position: 1: Dip Length
 - C: Dip Tin
 - XX: Contact Gold
 - X: Gold
 - A: Tray Package
 - Blank: W/O Lock
 - L1: With Lock
 - 00: G/F
 - 10: 10u"
 - 15: 15u"
 - 30: 30u"

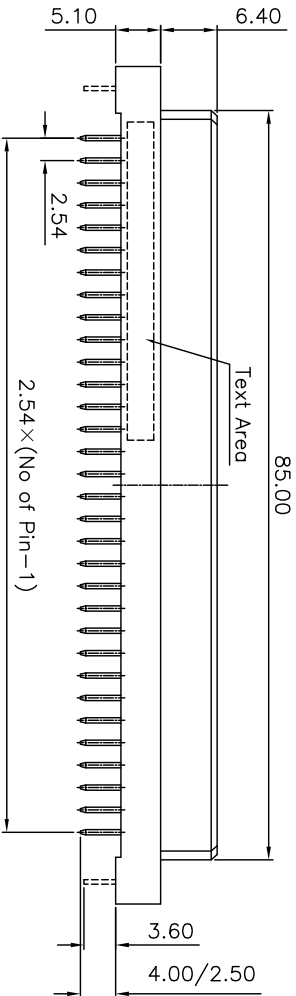

MATERIAL:
 Housing : PBT UL94V-0 Beige
 Contacts: Copper Alloy
 Lock: Phosphor Bronze

ELECTRICAL CHARACTERISTICS:
 Current Rating: 2 AMP
 Dielectric Withstanding Voltage: AC1000V for 1minute
 Insulator Resistance: 1000MΩ min at DC 500V
 Contact Resistance: 20mΩ max at DC 100mA
 Operating Temperature: -55°C ~ +125°C

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	64	a b	
	32	a -	

MODEL: 9001-32xx1CXXA	DRAWN BY : Leiqin	DATE:
TITLE : 2.54直母胶芯+直针欧式连接器	CHECKED BY : Liwei	DATE:
DRAWING NO:	REV. : A	APPROVED BY: Wuxin
SHEET: 1 OF 1	SCALE: 3:1	SIZE: A4 UNIT : mm

GENERAL TOLERANCE:
 (UNLESS SPECIFIED)

X.	±0.30mm	X.*	±	3'
X.X	±0.25mm	X.X'	±	2'
X.XX	±0.20mm	X.XX'	±	1'
X.XXX	±0.10mm	X.XXX'	±	0.5'

MEASURE POINT:
 QUADRANT POINT
 TANGENCY POINT
 INTERSECTION POINT

NO:	PARTICULAR	BY	DATE
REVISIONS			

深圳市吉威电子有限公司
 SZJUSTWELL ELECTRONICS CO., LTD