

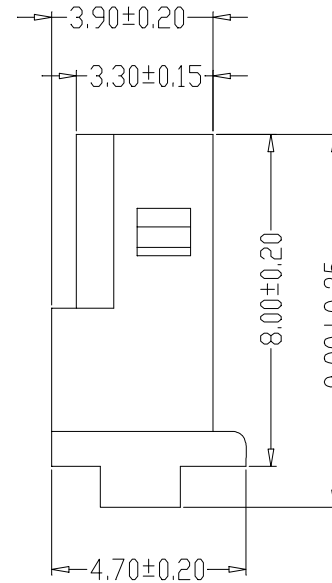


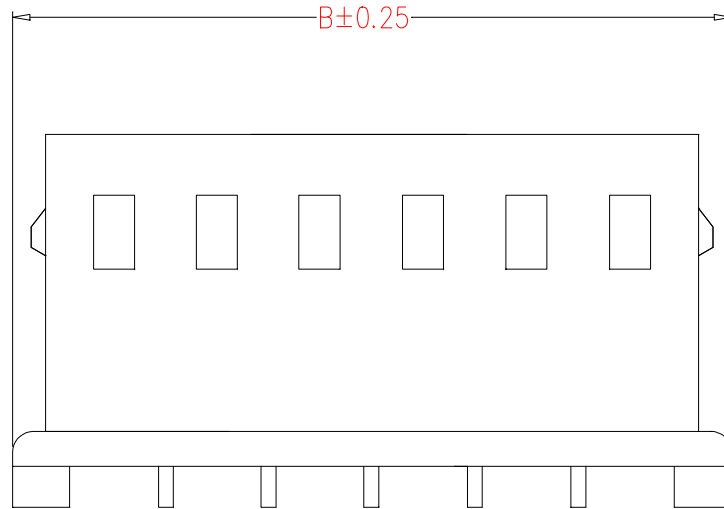

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Nylon66 UL94V-0

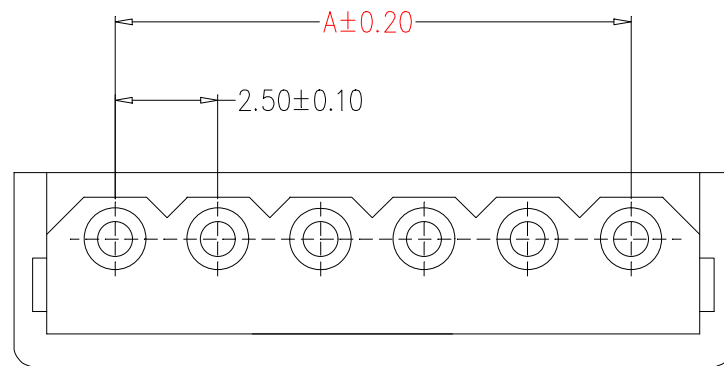

Circuit	Part NO.	Dimensions mm	
		A	B
2	HC-5264-2Y	2.50	7.40
3	HC-5264-3Y	5.00	9.90
4	HC-5264-4Y	7.50	12.40
5	HC-5264-5Y	10.00	14.90
6	HC-5264-6Y	12.50	17.40
7	HC-5264-7Y	15.00	19.90
8	HC-5264-8Y	17.50	22.40
9	HC-5264-9Y	20.00	24.90
10	HC-5264-10Y	22.50	27.40
11	HC-5264-11Y	25.00	29.90
12	HC-5264-12Y	27.50	32.40
13	HC-5264-13Y	30.00	34.90
14	HC-5264-14Y	32.50	37.40
15	HC-5264-15Y	35.00	39.90
16	HC-5264-16Y	37.50	42.40

			GENEERL TOLERANCE	制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK				
			X.X ±0.30	批 准 APPROVAL	产品名称 TITLE	5264孔座	版 本 REV.	A
1	初版发行		X.XX ±0.20	比 例 SCALE	产品料号 PART NO.	HC-5264-NY	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	X.XXX ±0.10	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1
			Angle ±3.0°	