

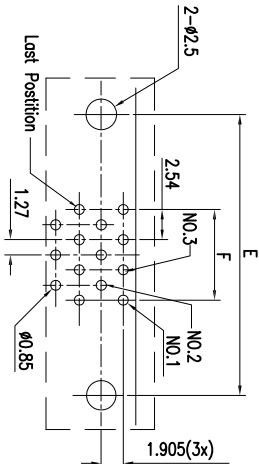
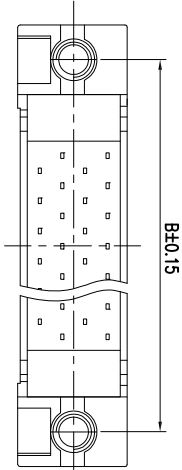


REV.	ECN NO.	DESCRIPTION	REVISER	DATE
AO		NEW	JAMES	22.11.04


- ELECTRICAL:**
- Current Rating: 1 Amp
 - Insulation Resistance: 500M Ω /Min
 - Withstanding Voltage: 500V AC/Min
 - Contact Resistance: 35m Ω Max
 - Temperature Range: -55°C ~ +105°C

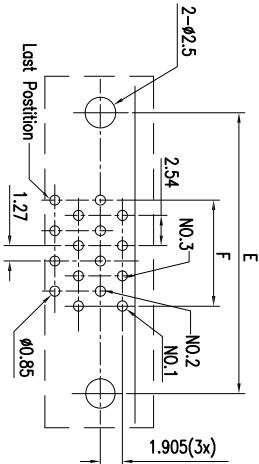

PCB Layout
(14,26,50 Pos)

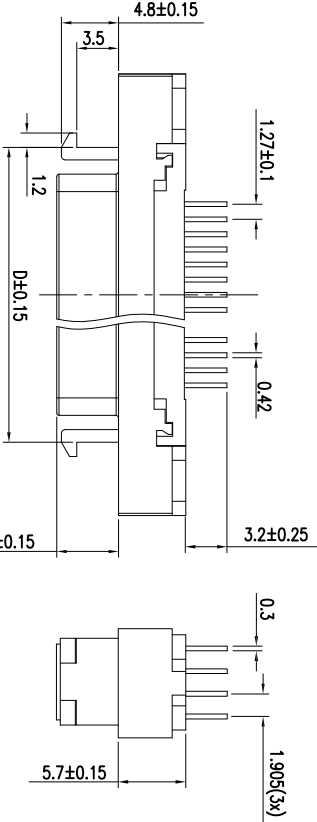

PCB Layout
(20,36,40,68,100 Pos)

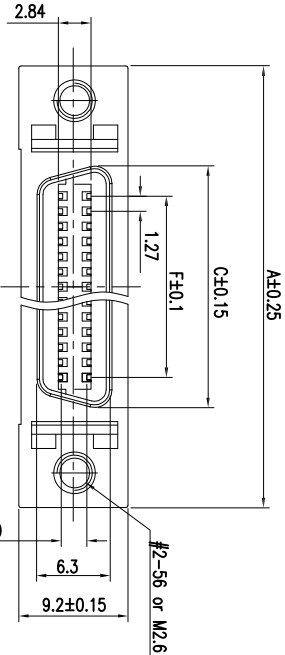

HOW TO ORDER:

GSSP1V1-XXXXXZ5-BP01X

F: Female

1: Dip Type

V1: 180. W/hook

14: 14PIN
20: 20PIN
26: 26PIN
36: 36PIN
50: 50PIN
68: 68PIN
100: 100PIN

B: Brass

P: Phospor Bronze

G: Full Gold
S: Selective Gold Bright TIN

1:G/F
3:3u" 7: 15u"

1: W/ #2-56

3: W/ M2.6

1: D1P=3.2

P: PBT L: LCP

B: Black

5. Shell Plated FULL NI

Z: Zn

No. of Pin	DIMENSIONS					
	A	B	C	D	E	F
14	29.51	23.64	12.6	17.25	23.64	7.62
20	33.32	27.45	16.43	21.06	27.45	11.43
26	37.13	31.26	20.24	24.76	31.26	15.24
36	43.48	37.61	26.5	31.11	37.61	21.59
40	46.08	40.15	29.14	33.30	40.15	24.13
50	52.37	46.5	35.39	40.0	46.5	30.48
68	64.00	57.92	46.90	51.00	57.92	41.91
100	84.18	78.23	67.14	71.50	78.23	62.23

比例 (Scale):1:1	图号 (DWG NO.)			
单位 (Unit):mm	设计 (Design)	James		
审核 (Checked)	James_Zhan			
批准 (Approved)				
页次 (Sheet)	1 OF 1			
版次 (Rev.):A0				
品名 (Title):	SCSI Female 180° DIP	料号 (P/N):	GSSP1V1.XXXXXZ5.BP01X	业务图
东莞市研达电子科技有限公司 DONGGUAN VANDA ELECTRONIC TECHNOLOGY CO., LTD. TEL:0769-85423105 FAX:0769-81501727				
3 HOUSING	PBT+30%GF	COLOR:BLACK		
2 SHELL	Zinc ALLOY	PLATING:NI		
1 TERMINAL	COPPER ALLOY	CONTACT AREA:SEE NOTE		
		SOLDER AREA:SN UNDER-PLATING:NI		
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS