

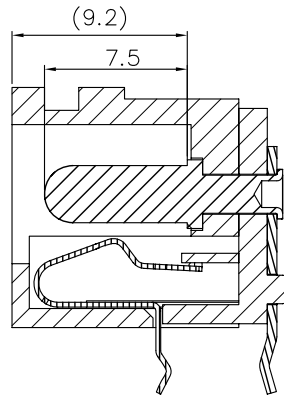



RECOMMENDED P. C. B. LAYOUT
UNSPECIFIED TOLERANCE: ±0.05
(TOP VIEW)

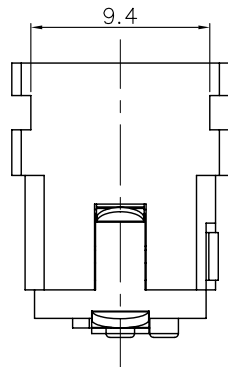

SECTION A-A
(插针规格: Ø3.0)

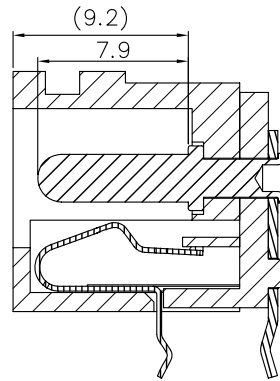

SECTION A-A
(插针规格: Ø2.0 & Ø2.5)

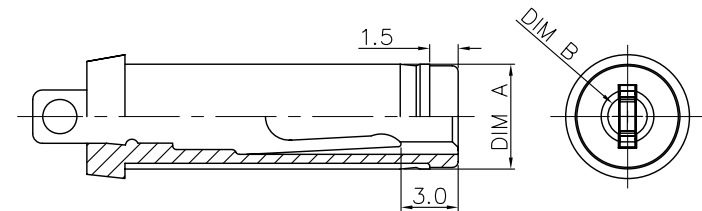

DC MATE PLUG

PIN	Ø2.0	Ø2.5	Ø3.0
DIM A	Ø6.3±0.05	Ø6.3±0.05	Ø6.55±0.05
DIM B	Ø2.05 ^{+0.10} _{-0.00}	Ø2.55 ^{+0.10} _{-0.00}	Ø3.05 ^{+0.10} _{-0.00}

Model No.	DC-062	DC-062-1
Schematic		
CIRCUIT DIAGRAM		

				TOLERANCE UNLESS SPECIFIED							
				UP TO 5mm: ±0.1	ANGULAR						
				ABOVE 5mm: ±0.2	±1°	NO	DATE	REVISIONS		BY	APPD
6	Shunt Terminal [3]	BRASS	1	Ag/Sn-PLATED	TITLE:DC JACK		UNIT : MM	ROHS COMPLIANT	DWN		
5	Tip spring [2]	SUS	1	Ag/Sn-PLATED	MODEL:DC-062		SCALE: 3:1	CHK'D			
4	Center pin terminal [1]	BRASS	1	Ag/Sn-PLATED	HAOYU(HONGKONG)LIMITED 皓宇(香港)有限公司		APPD				
3	Center pin	BRASS	1	Sn PLATED			PRO.AGL:		REV :A0		
2	Cover	PBT	1	BLACK							
1	Housing	PBT	1	BLACK							
NO.	PART NAME	MATERIAL	QTY	FINISHING							