


# Technical Data Sheet TOP View LEDs

### 67-21SUGC/S400-XX/TR8

#### **Features**

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free
- The product itself will remain within RoHS compliantersion.



• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the SMT TOP LED ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

#### **Device Selection Guide**


| C        |                      |             |
|----------|----------------------|-------------|
| Material | <b>Emitted Color</b> | Lens Color  |
| InGaN    | Super Green          | Water Clear |




Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 1 of 9


# 67-21SUGC/S400-XX/TR8


### **Package Dimensions**







Polarity





For reflow soldering (Proposal)





#### **Notes:** .All dimensions are in millimeters

Everlight Electronics Co., Ltd.

Device No.: DSE-671-213

http://www.everlight.com prepared date:07-29-2005 Rev. 3

Page: 2 of 9

Prepared by: Bennett



# 67-21SUGC/S400-XX/TR8

# **Absolute Maximum Ratings (Ta=25°C)**

| Parameter                                 | Symbol          | Rating             | Unit                   |
|---|-----------------|--------------------|------------------------|
| Reverse Voltage                           | $V_R$           | 5                  | V                      |
| Forward Current                           | ${ m I}_{ m F}$ | 25                 | mA                     |
| Operating Temperature                     | Topr            | <b>-</b> 40 ∼ +85  | $^{\circ}\!\mathbb{C}$ |
| Storage Temperature                       | Tstg            | <b>-</b> 40∼ +100  | $^{\circ}$             |
| Soldering Temperature                     | Tsol            | 260 (for 5 second) | $^{\circ}\!\mathbb{C}$ |
| Electrostatic Discharge                   | ESD             | 150                | V                      |
| Power Dissipation                         | Pd              | 110                | mW                     |
| Peak Forward Current(Duty 1/10<br>@ 1KHz) | IFP             | 100                | mA                     |

# **Electro-Optical Characteristics (Ta=25°C)**

| Parameter                    | Symbol       | *Chip<br>Rank. | Min. | Тур. | Max. | Unit    | Condition            |
|------------------------------|--------------|----------------|------|------|------|---------|----------------------|
| Luminous Intensity           | Iv           | A4             | 150  | 279  |      | mcd     | IF=20mA              |
|                              |              | A5             | 250  | 432  |      |         |                      |
|                              |              | X6             | 300  | 500  |      |         |                      |
| Viewing Angle                | 2 \theta 1/2 |                |      | 120  |      | deg     | I <sub>F</sub> =20mA |
| Peak Wavelength              | λр           |                |      | 518  |      | nm      | I <sub>F</sub> =20mA |
| Dominant Wavelength          | λd           |                |      | 525  |      | nm      | I <sub>F</sub> =20mA |
| Spectrum Radiation Bandwidth | Δλ           |                |      | 35   |      | nm      | I <sub>F</sub> =20mA |
| Forward Voltage              | VF           |                |      | 3.5  | 4.3  | V       | I <sub>F</sub> =20mA |
| Reverse Current              | Ir           |                |      |      | 50   | $\mu$ A | V <sub>R</sub> =5V   |


# \*67-21SUGC/S400-<u>XX</u>/TR8

Chip Rank

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 3 of 9

# 67-21SUGC/S400-XX/TR8

### **Typical Electro-Optical Characteristics Curves**

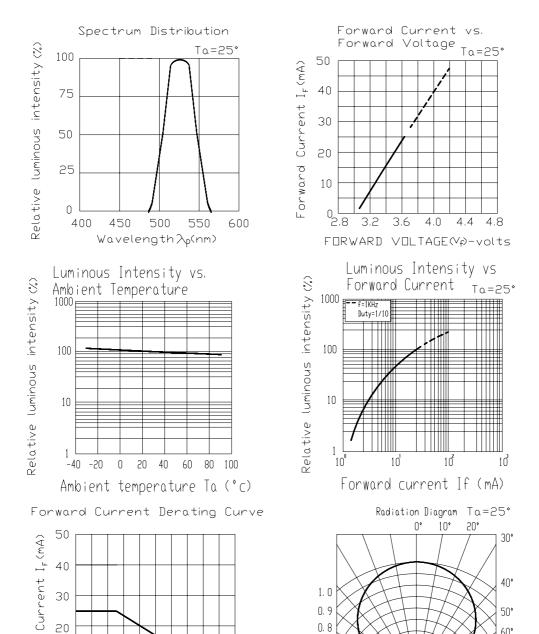

Device No.: DSE-671-213

20

10

0 0

AMBIENT TEMPERATURE TA (°C)

Forward

0.8

0.7

Prepared by: Bennett

0. 1 0. 2

0.3

70°

80°



### 67-21SUGC/S400-XX/TR8

### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

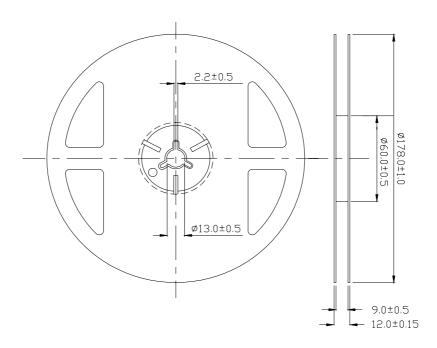

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No.: DSE-671-213

http://www.everlight.com prepared date:07-29-2005 Rev. 3


Page: 5 of 9

Prepared by: Bennett




# 67-21SUGC/S400-XX/TR8

### Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

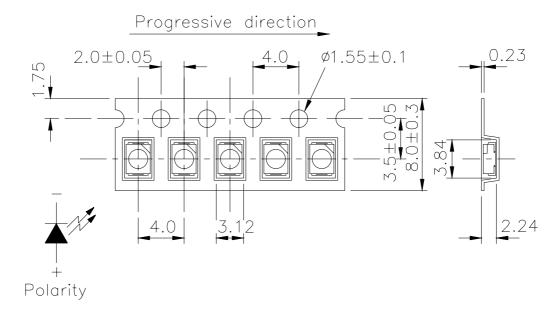

Note: The tolerances unless mentioned is  $\pm 0.1$ mm

## **Moisture Resistant Packaging**

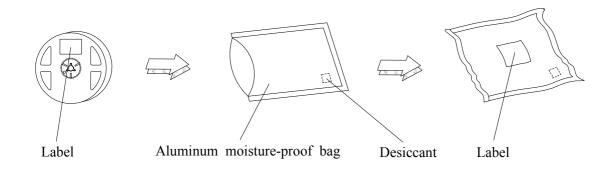

Everlight Electronics Co., Ltd.

Device No.: DSE-671-213

http://www.everlight.com prepared date:07-29-2005 Rev. 3

Page: 6 of 9

Prepared by: Bennett



# 67-21SUGC/S400-XX/TR8

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

| No. | Items                               | Test Condition                       | Test<br>Hours/Cycles | Sample<br>Size | Ac/Re |
|-----|-------------------------------------|--------------------------------------|----------------------|----------------|-------|
| 1   | Reflow Soldering                    | Temp. : 260°C±5°C<br>Min. 5sec.      | 6 min                | 22 PCS.        | 0/1   |
| 2   | Temperature Cycle                   | H:+100°C 15min ∫ 5 min L:-40°C 15min | 300 Cycles           | 22 PCS.        | 0/1   |
| 3   | Thermal Shock                       | H:+100°C 5min ∫ 10 sec L:-10°C 5min  | 300 Cycles           | 22 PCS.        | 0/1   |
| 4   | High Temperature<br>Storage         | Temp. : 100°C                        | 1000 Hrs.            | 22 PCS.        | 0/1   |
| 5   | Low Temperature<br>Storage          | Temp. : -40°C                        | 1000 Hrs.            | 22 PCS.        | 0/1   |
| 6   | DC Operating Life                   | $I_F = 20 \text{ mA}$                | 1000 Hrs.            | 22 PCS.        | 0/1   |
| 7   | High Temperature /<br>High Humidity | 85°C / 85%RH                         | 1000 Hrs.            | 22 PCS.        | 0/1   |

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 7 of 9



### 67-21SUGC/S400-XX/TR8

#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

#### 3. Soldering Condition

3.1 Pb-free solder temperature profile

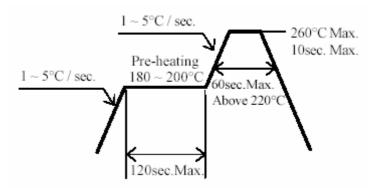

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 8 of 9



### 67-21SUGC/S400-XX/TR8

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

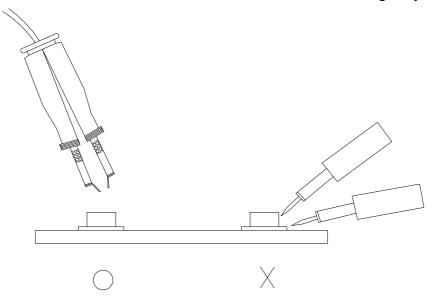

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 9 of 9