# 74HC7540; 74HCT7540

Octal Schmitt trigger buffer/line driver; 3-state; inverting

Rev. 5 — 26 May 2016

Product data

**Product data sheet** 

#### 1. **General description**

The 74HC7540; 74HCT7540 is an 8-bit inverting buffer/line driver with Schmitt-trigger inputs and 3-state outputs. The device features two output enables (OE1 and OE2). A HIGH on OEn causes the outputs to assume a high-impedance OFF-state. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of V<sub>CC</sub>. Schmitt trigger inputs transform slowly changing input signals into sharply defined jitter-free output signals.

#### 2. **Features and benefits**

- Input levels:
  - ◆ For 74HC7540: CMOS level
  - ◆ For 74HCT7540: TTL level
- Inverting outputs
- Low-power dissipation
- Complies with JEDEC standard no. 7 A
- Multiple package options
- ESD protection:
  - HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C


#### Ordering information 3.

Table 1. **Ordering information** 

Type number	Package									
	Temperature range	Name	Description	Version						
74HC7540D	−40 °C to +125 °C	SO20	plastic small outline package; 20 leads;	SOT163-1						
74HCT7540D			body width 7.5 mm							
74HC7540DB	–40 °C to +125 °C	SSOP20	plastic shrink small outline package; 20 leads; body width 5.3 mm	SOT339-1						




### 4. Functional diagram

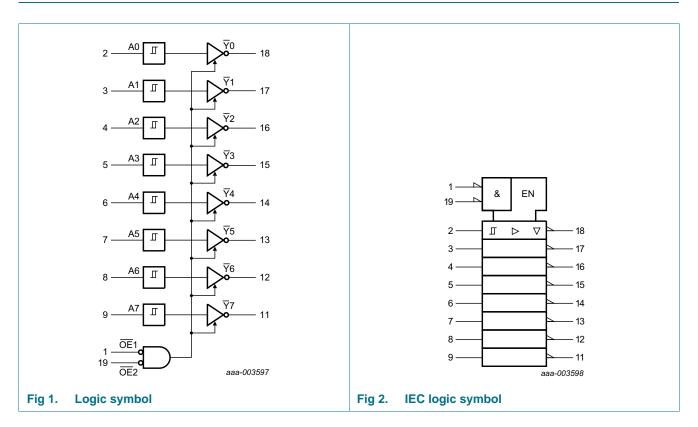

### 5. Pinning information

### 5.1 Pinning

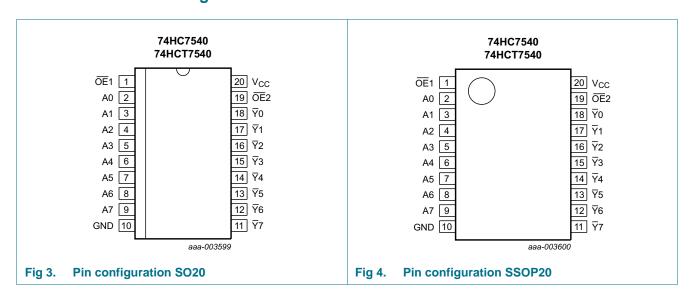

### 5.2 Pin description

Table 2. Pin description

Symbol	Pin	Description
OE1	1	output enable input (active LOW)
A0 to A7	2, 3, 4, 5, 6, 7, 8, 9	data input
GND	10	ground (0 V)
$\overline{Y}$ 0 to $\overline{Y}$ 7	18, 17, 16, 15, 14, 13, 12, 11	data output
OE2	19	output enable input (active LOW)
V <sub>CC</sub>	20	supply voltage

### 6. Functional description

Table 3. Functional table[1]

Control		Input	Output
OE1	OE2	An	Yn
L	L	L	Н
L	L	Н	L
Χ	Н	X	Z
Н	X	X	Z

<sup>[1]</sup> H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = high-impedance OFF-state.

## 7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Max	Unit
V <sub>CC</sub>	supply voltage			-0.5	+7	V
I <sub>IK</sub>	input clamping current	$V_{I} < -0.5 \text{ V or } V_{I} > V_{CC} + 0.5 \text{ V}$	<u>[1]</u>	-	±20	mA
I <sub>OK</sub>	output clamping current	$V_{O} < -0.5 \text{ V or } V_{O} > V_{CC} + 0.5 \text{ V}$	<u>[1]</u>	-	±20	mA
Io	output current	$-0.5 \text{ V} < \text{V}_{\text{O}} < \text{V}_{\text{CC}} + 0.5 \text{ V}$		-	±35	mA
I <sub>CC</sub>	supply current			-	70	mA
I <sub>GND</sub>	ground current			-70	-	mA
T <sub>stg</sub>	storage temperature			-65	+150	°C
P <sub>tot</sub>	total power dissipation	SO20, SSOP20	[2]	-	500	mW

<sup>[1]</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>[2]</sup> For SO20 package: above 70 °C the value of  $P_{tot}$  derates linearly with 8 mW/K. For SSOP20 package: above 60 °C the value of  $P_{tot}$  derates linearly with 5.5 mW/K.

## 8. Recommended operating conditions

#### Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions	7	4HC754	0	74HCT7540			Unit
			Min	Тур	Max	Min	Тур	Max	
V <sub>CC</sub>	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V
VI	input voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
Vo	output voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
T <sub>amb</sub>	ambient temperature		-40	+25	+125	-40	+25	+125	°C

### 9. Static characteristics

#### Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	T <sub>ar</sub>	<sub>nb</sub> = 25	°C	T <sub>amb</sub> = -40 °C to +85 °C		T <sub>amb</sub> = -40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HC754	40							•		
$V_{OH}$	HIGH-level	$V_I = V_{T+}$ or $V_{T-}$								
	output voltage	$I_{O} = -20 \mu A; V_{CC} = 2.0 V$	1.9	2.0	-	1.9	-	1.9	-	V
		$I_{O} = -20 \mu A; V_{CC} = 4.5 V$	4.4	4.5	-	4.4	-	4.4	-	V
		$I_O = -20 \mu A; V_{CC} = 6.0 V$	5.9	6.0	-	5.9	-	5.9	-	V
		$I_{O} = -6.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.98	4.32	-	3.84	-	3.7	-	V
		$I_{O} = -7.8 \text{ mA}; V_{CC} = 6.0 \text{ V}$	5.48	5.81	-	5.34	-	5.2	-	V
V <sub>OL</sub>	LOW-level	$V_I = V_{T+}$ or $V_{T-}$								
	output voltage	$I_O = 20 \mu A; V_{CC} = 2.0 V$	-	0	0.1	-	0.1	-	0.1	V
		$I_O = 20 \mu A; V_{CC} = 4.5 V$	-	0	0.1	-	0.1	-	0.1	V
		$I_O = 20 \mu A; V_{CC} = 6.0 V$	-	0	0.1	-	0.1	-	0.1	V
		$I_O = 6.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	0.15	0.26	-	0.33	-	0.4	V
		$I_O = 7.8 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.16	0.26	-	0.33	-	0.4	V
l <sub>l</sub>	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$	-	-	±0.1	-	±1.0	-	±1.0	μΑ
l <sub>OZ</sub>	OFF-state output current	$V_I = V_{T+}$ or $V_{T-}$ ; $V_{CC} = 6.0$ V; $V_O = V_{CC}$ or GND	-	-	±0.5	-	±5.0	-	±10	μΑ
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0 \text{ V}$	-	-	8.0	-	80	-	160	μА
Cı	input capacitance		-	3.5	-	-	-	-	-	pF
74HCT7	540	1	1	1		1				
V <sub>OH</sub>	HIGH-level	$V_{I} = V_{T+} \text{ or } V_{T-}; V_{CC} = 4.5 \text{ V}$								
	output voltage	I <sub>O</sub> = -20 μA	4.4	4.5	-	4.4	-	4.4	-	V
		$I_{O} = -6.0 \text{ mA}$	3.98	4.32	-	3.84	-	3.7	-	V

 Table 6.
 Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	T <sub>amb</sub> = 25 °C				- –40 °C 85 °C	T <sub>amb</sub> = -40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	
$V_{OL}$	LOW-level	$V_{I} = V_{T+} \text{ or } V_{T-}; V_{CC} = 4.5 \text{ V}$								
	output voltage	I <sub>O</sub> = 20 μA;	-	0	0.1	-	0.1	-	0.1	V
		$I_{O} = 6.0 \text{ mA};$	-	0.15	0.26	-	0.33	-	0.4	V
l <sub>l</sub>	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$	-	-	±0.1	-	±1.0	-	±1.0	μΑ
l <sub>OZ</sub>	OFF-state output current	$V_I = V_{T+}$ or $V_{T-}$ ; $V_{CC} = 5.5$ V; $V_O = V_{CC}$ or GND	-	-	±0.5	-	±5.0	-	±10	μΑ
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5 \text{ V}$	-	-	8.0	-	80	-	160	μΑ
Δl <sub>CC</sub>	additional supply current	per input pin; $I_O = 0$ A; $V_I = V_{CC} - 2.1$ V; other inputs at $V_{CC}$ or GND; $V_{CC} = 4.5$ V to 5.5 V								
		An input	-	20	72	-	90	-	98	μΑ
		OEn input	-	130	468	-	585	-	637	μΑ
Cı	input capacitance		-	3.5	-	-	-	-	-	pF

## 10. Dynamic characteristics

#### Table 7. Dynamic characteristics

 $GND = 0 \ V; \ C_L = 50 \ pF;$  for test circuit see Figure 7.

Symbol	Parameter	Conditions		<sub>imb</sub> = 25	5 °C	$T_{amb} = -40^{\circ}$	Unit	
			Min	Тур	Max	Max (85 °C)	Max (125 °C)	
74HC754	40							
t <sub>pd</sub>	propagation delay	An to $\overline{Y}$ n; see Figure 5	[1]					
		V <sub>CC</sub> = 2.0 V	-	39	120	150	180	ns
		V <sub>CC</sub> = 4.5 V	-	14	24	30	36	ns
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$	-	11	-	-	-	ns
		V <sub>CC</sub> = 6.0 V	-	11	20	26	31	ns
t <sub>en</sub>	enable time	OEn to Yn; see Figure 6	[1]					
		V <sub>CC</sub> = 2.0 V	-	41	150	190	225	ns
		V <sub>CC</sub> = 4.5 V	-	15	30	38	45	ns
		V <sub>CC</sub> = 6.0 V	-	12	26	33	38	ns
t <sub>dis</sub>	disable time	OEn to Yn; see Figure 6	[1]					
		V <sub>CC</sub> = 2.0 V	-	52	150	190	225	ns
		V <sub>CC</sub> = 4.5 V	-	19	30	38	45	ns
		V <sub>CC</sub> = 6.0 V	-	15	26	33	38	ns

Table 7. Dynamic characteristics

 $GND = 0 \ V; \ C_L = 50 \ pF;$  for test circuit see <u>Figure 7</u>.

Symbol	Parameter	Conditions		Tan	<sub>nb</sub> = 25	°C	$T_{amb} = -40$ °	C to +125 °C	Unit
				Min	Тур	Max	Max (85 °C)	Max (125 °C)	
t <sub>t</sub>	transition time	see Figure 5	[2]						
		V <sub>CC</sub> = 2.0 V		-	14	60	75	90	ns
		V <sub>CC</sub> = 4.5 V		-	5	12	15	18	ns
		V <sub>CC</sub> = 6.0 V		-	4	10	13	15	ns
$C_{PD}$	power dissipation capacitance	per package; V <sub>I</sub> = GND to V <sub>CC</sub>	[3]	-	29	-	-	-	pF
74HCT7	540						+		-
t <sub>pd</sub> p	propagation delay	An to Yn; see Figure 5	<u>[1]</u>						
		V <sub>CC</sub> = 4.5 V		-	19	32	40	48	ns
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$		-	16	-	-	-	ns
t <sub>en</sub>	enable time	OEn to Yn; see Figure 6	<u>[1]</u>						
		V <sub>CC</sub> = 4.5 V		-	19	32	40	48	ns
t <sub>dis</sub>	disable time	OEn to Yn; see Figure 6	<u>[1]</u>						
		V <sub>CC</sub> = 4.5 V		-	20	32	40	48	ns
t <sub>t</sub>	transition time	V <sub>CC</sub> = 4.5 V; see <u>Figure 5</u>	[2]	-	5	12	15	18	ns
$C_{PD}$	power dissipation capacitance	per package; V <sub>I</sub> = GND to V <sub>CC</sub> – 1.5 V	[3]	-	31	-	-	-	pF

[1]  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .

 $t_{\text{en}}$  is the same as  $t_{\text{PZL}}$  and  $t_{\text{PZH}}.$ 

 $t_{dis}$  is the same as  $t_{PLZ}$  and  $t_{PHZ}$ .

- $[2] \quad t_t \text{ is the same as } t_{THL} \text{ and } t_{TLH}.$
- [3]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu W$ ):

$$P_D$$
 =  $C_{PD} \times V_{CC}{}^2 \times f_i \times N$  +  $\sum$  ( $C_L \times V_{CC}{}^2 \times f_o)$  where:

 $f_i$  = input frequency in MHz;

 $f_o$  = output frequency in MHz;


C<sub>L</sub> = output load capacitance in pF;

V<sub>CC</sub> = supply voltage in V;

N = number of inputs switching;

 $\sum (C_L \times V_{CC}^2 \times f_0) = \text{sum of outputs.}$ 


### 11. Waveforms



Measurement points are given in Table 8.

 $V_{\text{OL}}$  and  $V_{\text{OH}}$  are typical voltage output levels that occur with the output load.

Fig 5. Input to output propagation delays

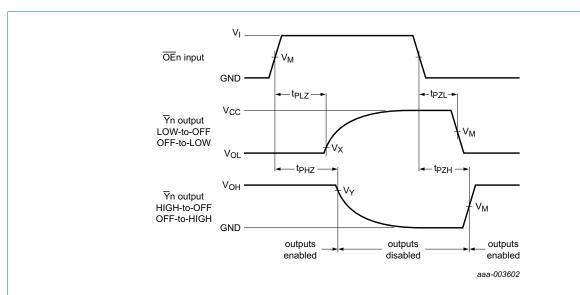


Measurement points are given in Table 8.


 $V_{OL}$  and  $V_{OH}$  are typical voltage output levels that occur with the output load.

Fig 6. 3-state enable and disable times

Table 8. Measurement points

Туре	Input	Output		
	$V_{M}$	V <sub>M</sub>	$V_X$	V <sub>Y</sub>
74HC7540	0.5V <sub>CC</sub>	0.5V <sub>CC</sub>	0.1V <sub>CC</sub>	0.9V <sub>CC</sub>
74HCT7540	1.3 V	1.3 V	0.1V <sub>CC</sub>	0.9V <sub>CC</sub>

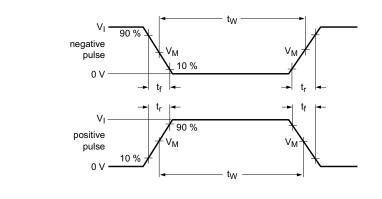



Test data is given in Table 9.

Definitions test circuit:

 $R_T$  = Termination resistance should be equal to output impedance  $Z_0$  of the pulse generator

 $C_L$  = Load capacitance including jig and probe capacitance

R<sub>L</sub> = Load resistance

S1 = Test selection switch

Fig 7. Test circuit for measuring switching times

Table 9. Test data

Туре	Input		Load		S1 position			
	VI	t <sub>r</sub> , t <sub>f</sub>	CL	R <sub>L</sub>	t <sub>PHL</sub> , t <sub>PLH</sub>	t <sub>PZH</sub> , t <sub>PHZ</sub>	t <sub>PZL</sub> , t <sub>PLZ</sub>	
74HC7540	V <sub>CC</sub>	6 ns	15 pF, 50 pF	1 kΩ	open	GND	V <sub>CC</sub>	
74HCT7540	3 V	6 ns	15 pF, 50 pF	1 kΩ	open	GND	V <sub>CC</sub>	


### 12. Transfer characteristics

Table 10. Transfer characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V); see Figure 8 and Figure 9.

Symbol	Parameter	Conditions	Tai	<sub>nb</sub> = 25	°C	T <sub>amb</sub> = -40 °C to +85 °C		T <sub>amb</sub> = -40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HC75	40									
V <sub>T+</sub>	positive-going	V <sub>CC</sub> = 2.0 V	-	-	1.5	-	1.5	-	1.5	V
	threshold	V <sub>CC</sub> = 4.5 V	-	-	3.15	-	3.15	-	3.15	V
	voltage	V <sub>CC</sub> = 6.0 V	-	-	4.2	-	4.2	-	4.2	V
$V_{T-}$	negative-going	V <sub>CC</sub> = 2.0 V	0.3	-	-	0.3	-	0.3	-	V
	threshold voltage	V <sub>CC</sub> = 4.5 V	1.35	-	-	1.35	-	1.35	-	V
	voitage	V <sub>CC</sub> = 6.0 V	1.8	-	-	1.8	-	1.8	-	V
V <sub>H</sub>	hysteresis	V <sub>CC</sub> = 2.0 V	0.1	0.20	-	0.1	-	0.1	-	V
	voltage	V <sub>CC</sub> = 4.5 V	0.25	0.40	-	0.25	-	0.25	-	V
		V <sub>CC</sub> = 6.0 V	0.3	0.5	-	0.3	-	0.3	-	V
74HCT7	540			1		I .	l		I .	
V <sub>T+</sub>	positive-going	V <sub>CC</sub> = 4.5 V	-	-	2.0	-	2.0	-	2.0	V
	threshold voltage	V <sub>CC</sub> = 5.5 V	-	-	2.1	-	2.1	-	2.1	V
$V_{T-}$	negative-going	V <sub>CC</sub> = 4.5 V	0.7	-	-	0.64	-	0.6	-	V
	threshold voltage	V <sub>CC</sub> = 5.5 V	0.8	-	-	0.74	-	0.7	-	V
V <sub>H</sub>	hysteresis	V <sub>CC</sub> = 4.5 V	0.17	0.23	-	-	-	-	-	V
	voltage	V <sub>CC</sub> = 5.5 V	0.17	0.23	-	-	-	-	-	V


### 13. Transfer characteristics waveforms

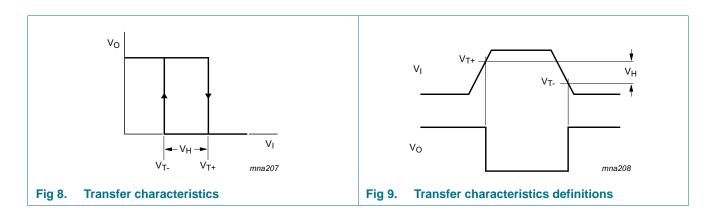

### 14. Package outline

#### SO20: plastic small outline package; 20 leads; body width 7.5 mm

SOT163-1

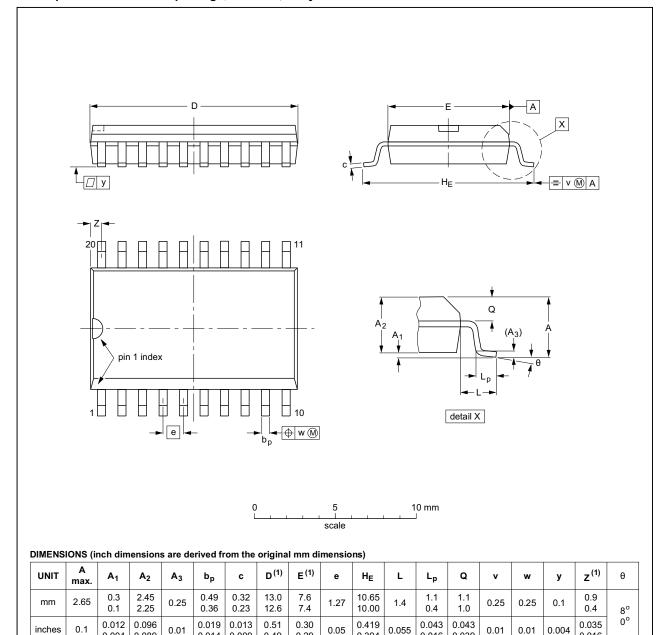

#### Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

0.014

0.009

OUTLINE		REFER	EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE	
SOT163-1	075E04	MS-013				<del>-99-12-27</del> 03-02-19	

0.394

0.016

0.039

Fig 10. Package outline SOT163-1 (SO20)

0.004


0.089

74HC\_HCT7540

All information provided in this document is subject to legal disclaimers.

SSOP20: plastic shrink small outline package; 20 leads; body width 5.3 mm

SOT339-1

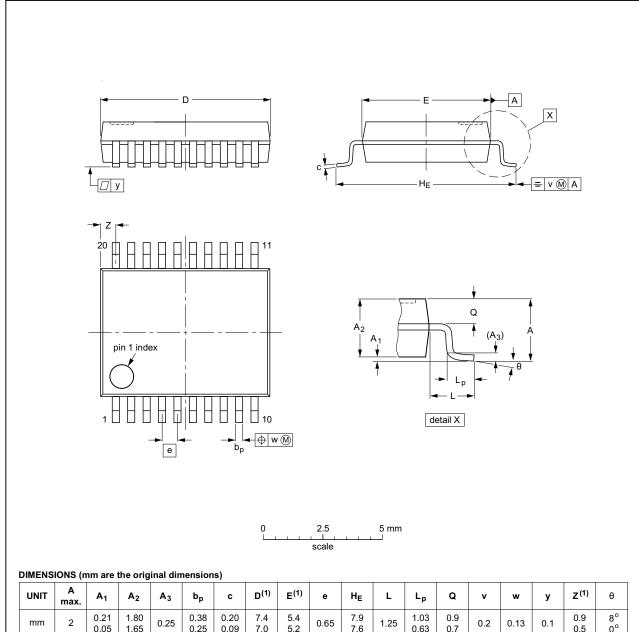

						-												
UNIT	A max.	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	b <sub>p</sub>	С	D <sup>(1)</sup>	E <sup>(1)</sup>	е	HE	L	Lp	Q	v	w	у	Z <sup>(1)</sup>	θ
mm	2	0.21 0.05	1.80 1.65	0.25	0.38 0.25	0.20 0.09	7.4 7.0	5.4 5.2	0.65	7.9 7.6	1.25	1.03 0.63	0.9 0.7	0.2	0.13	0.1	0.9 0.5	8° 0°

1. Plastic or metal protrusions of 0.2 mm maximum per side are not included.

OUTLINE		REFER	EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE	
SOT339-1		MO-150				<del>99-12-27</del> 03-02-19	

Fig 11. Package outline SOT339-1 (SSOP20)

74HC\_HCT7540

All information provided in this document is subject to legal disclaimers.

### 15. Abbreviations

#### Table 11. Abbreviations

Acronym	Description
CMOS	Complementary Metal-Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
HBM	Human Body Model
LSTTL	Low-power Schottky Transistor-Transistor Logic
MM	Machine Model

## 16. Revision history

#### Table 12. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC_HCT7540 v.5	20160526	Product data sheet	-	74HC_HCT7540 v.4
Modifications:	Type numbers	s 74HC7540N and 74HCT7540	ON (SOT146-1) remo	oved.
	• <u>Table 6</u> : cond	itions for OFF-state output curi	rent have changed.	
74HC_HCT7540 v.4	20121231	Product data sheet	-	74HC_HCT7540 v.3
Modifications:	<ul> <li>I<sub>OZ</sub> added to s</li> </ul>	static characteristics table.		
74HC_HCT7540 v.3	20120827	Product data sheet	-	74HC_HCT7540_CNV v.2
Modifications:		this data sheet has been rede NXP Semiconductors.	signed to comply wit	th the new identity
	<ul> <li>Legal texts ha</li> </ul>	ave been adapted to the new c	ompany name where	e appropriate.
74HC_HCT7540_CNV v.2	19970917	Product specification	-	-

### 17. Legal information

#### 17.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

#### 17.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### 17.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

74HC\_HCT7540

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

## 74HC7540; 74HCT7540

#### Octal Schmitt trigger buffer/line driver; 3-state; inverting

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### 17.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

#### 18. Contact information

For more information, please visit: http://www.nexperia.com

For sales office addresses, please send an email to: salesaddresses@nexperia.com

### 19. Contents

1	General description
2	Features and benefits
3	Ordering information 1
4	Functional diagram 2
5	Pinning information 2
5.1	Pinning
5.2	Pin description
6	Functional description 3
7	Limiting values 3
8	Recommended operating conditions 4
9	Static characteristics4
10	Dynamic characteristics
11	Waveforms
12	Transfer characteristics
13	Transfer characteristics waveforms
14	Package outline
15	Abbreviations
16	Revision history
17	Legal information
17.1	Data sheet status
17.2	Definitions
17.3	Disclaimers
17.4	Trademarks14
18	Contact information 14
19	Contents

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Nexperia:

<u>74HC7540D,112</u> <u>74HC7540DB,112</u> <u>74HC7540DB,118</u> <u>74HC7540DB,118</u> <u>74HC7540D,118</u> <u>74HC7540D,112</u> <u>74HCT7540D,118</u>