

#### Is Now Part of



## ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



February 2015

## FDMC6686P

## P-Channel PowerTrench<sup>®</sup> MOSFET -20 V, -56 A, 4 m $\Omega$

#### **Features**

- Max  $r_{DS(on)} = 4 \text{ m}\Omega$  at  $V_{GS} = -4.5 \text{ V}$ ,  $I_D = -18 \text{ A}$
- Max  $r_{DS(on)}$  = 5.7 m $\Omega$  at  $V_{GS}$  = -2.5 V,  $I_D$  = -16 A
- Max  $r_{DS(on)}$  =11.5 m $\Omega$  at  $V_{GS}$  = -1.8 V,  $I_D$  = -11 A
- High performance trench technology for extremely low r<sub>DS(on)</sub>
- High power and current handling capability in a widely used surface mount package
- Lead-free and RoHS Compliant





## **General Description**

This P-Channel MOSFET is produced using Fairchild Semiconductor's advanced PowerTrench® process that has been optimized for  $r_{DS(ON)}$ , switching performance and ruggedness.

## **Applications**

- Load Switch
- Battery Management
- Power Management
- Reverse Polarity Protection

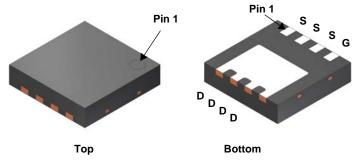



Power 33

#### MOSFET Maximum Ratings TA = 25 °C unless otherwise noted

Symbol	Param	eter		Ratings	Units	
$V_{DS}$	Drain to Source Voltage			-20	V	
$V_{GS}$	Gate to Source Voltage			±8	V	
I <sub>D</sub>	Drain Current -Continuous	T <sub>C</sub> = 25 °C		-56		
	-Continuous	T <sub>A</sub> = 25 °C	(Note 1a)	-18	Α	
	-Pulsed		(Note 3)	-377		
D	Power Dissipation	T <sub>C</sub> = 25 °C		40	W	
$P_{D}$	Power Dissipation	T <sub>A</sub> = 25 °C	(Note 1a)	2.3	VV	
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Junction Tempera	ature Range		-55 to +150	°C	

#### **Thermal Characteristics**

$R_{\theta JC}$	Thermal Resistance, Junction to Case	3.1	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note	1a) 53	C/VV

#### **Package Marking and Ordering Information**

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDMC6686P	FDMC6686P	Power 33	13 "	12 mm	3000 units

Max Units

## **Electrical Characteristics** $T_J = 25$ °C unless otherwise noted

Parameter

Off Chai	racteristics					
$BV_{DSS}$	Drain to Source Breakdown Voltage	$I_D = -250 \mu A, V_{GS} = 0 V$	-20			V
$\frac{\Delta BV_{DSS}}{\Delta T_{J}}$	Breakdown Voltage Temperature Coefficient	$I_D$ = -250 $\mu$ A, referenced to 25 °C		-15		mV/°C
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = -16 V, V <sub>GS</sub> = 0 V			-1	μΑ
I <sub>GSS</sub>	Gate to Source Leakage Current	$V_{GS} = \pm 8 \text{ V}, V_{DS} = 0 \text{ V}$			±100	nA

**Test Conditions** 

Min

Тур

#### **On Characteristics**

Symbol

V <sub>GS(th)</sub>	Gate to Source Threshold Voltage	$V_{GS} = V_{DS}, I_{D} = -250 \mu A$	-0.4	-0.75	-1	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	$I_D$ = -250 μA, referenced to 25 °C		3		mV/°C
	Static Drain to Source On Resistance	$V_{GS} = -4.5 \text{ V}, I_D = -18 \text{ A}$		3.3	4	mΩ
_		$V_{GS} = -2.5 \text{ V}, I_D = -16 \text{ A}$		4.1	5.7	
r <sub>DS(on)</sub>		$V_{GS} = -1.8 \text{ V}, I_D = -11 \text{ A}$		6	11.5	
		$V_{GS} = -4.5 \text{ V}, I_D = -18 \text{ A}, T_J = 125 \text{ °C}$		4.3	6.5	
9 <sub>FS</sub>	Forward Transconductance	$V_{DS} = -5 \text{ V}, I_{D} = -18 \text{ A}$		116		S

### **Dynamic Characteristics**

C <sub>iss</sub>	Input Capacitance	V 40.V V 0.V	8800	13200	pF
C <sub>oss</sub>	Output Capacitance	$V_{DS} = -10 \text{ V}, V_{GS} = 0 \text{ V},$ f = 1  MHz	1520	2280	pF
C <sub>rss</sub>	Reverse Transfer Capacitance	1 - 1 1/11/12	1340	2010	pF
$R_g$	Gate Resistance		6.2		Ω

#### **Switching Characteristics**


	•				
t <sub>d(on)</sub>	Turn-On Delay Time		25	40	ns
t <sub>r</sub>	Rise Time	V <sub>DD</sub> = -10 V, I <sub>D</sub> = -18 A,	77	122	ns
t <sub>d(off)</sub>	Turn-Off Delay Time	$V_{GS} = -4.5 \text{ V}, R_{GEN} = 6 \Omega$	317	506	ns
t <sub>f</sub>	Fall Time		178	285	ns
$Q_g$	Total Gate Charge	V 40.V L 40.A	87	122	nC
Q <sub>gs</sub>	Gate to Source Charge	$V_{DD} = -10 \text{ V}, I_{D} = -18 \text{ A},$ $V_{GS} = -4.5 \text{ V}$	14		nC
$Q_{gd}$	Gate to Drain "Miller" Charge	VGS = 4.5 V	24		nC

#### **Drain-Source Diode Characteristics**


$V_{SD}$	Source to Drain Diode Forward Voltage	$V_{GS} = 0 \text{ V}, I_S = -18 \text{ A}$ (Note 2)		-0.7	-1.2	V
	Source to Drain Diode Forward Voltage	$V_{GS} = 0 \text{ V}, I_{S} = -2 \text{ A}$ (Note 2)		-0.6	-1.2	
t <sub>rr</sub>	Reverse Recovery Time	L = 19 A di/dt = 100 A/va		38	61	ns
Q <sub>rr</sub>	Reverse Recovery Charge	I <sub>F</sub> = -18 A, di/dt = 100 A/μs		24	39	nC

#### NOTES

<sup>1.</sup> R<sub>0,JA</sub> is determined with the device mounted on a 1 in<sup>2</sup> pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR-4 material. R<sub>0,JC</sub> is guaranteed by design while R<sub>0,CA</sub> is determined by the user's board design.



a. 53 °C/W when mounted on a 1 in<sup>2</sup> pad of 2 oz copper.



b. 125 °C/W when mounted on a minimum pad of 2 oz copper.

<sup>2.</sup> Pulse Test: Pulse Width < 300  $\mu\text{s},$  Duty cycle < 2.0%.

<sup>3.</sup> Pulse Id refers to Forward Bias Safe Operation Area.

## Typical Characteristics T<sub>J</sub> = 25 °C unless otherwise noted

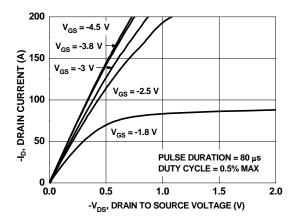


Figure 1. On-Region Characteristics

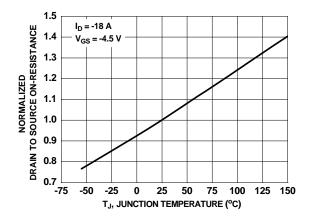


Figure 3. Normalized On-Resistance vs Junction Temperature

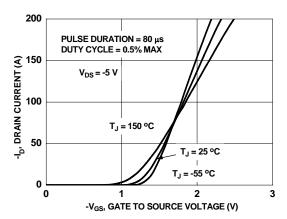


Figure 5. Transfer Characteristics

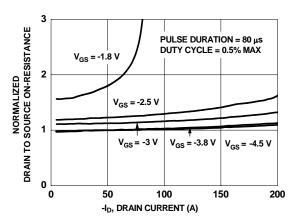


Figure 2. Normalized On-Resistance vs Drain Current and Gate Voltage

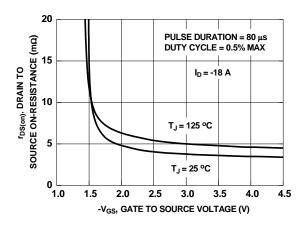


Figure 4. On-Resistance vs Gate to Source Voltage

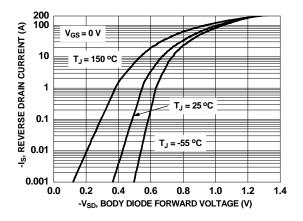


Figure 6. Source to Drain Diode Forward Voltage vs Source Current

## Typical Characteristics T<sub>J</sub> = 25 °C unless otherwise noted

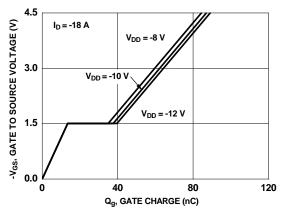


Figure 7. Gate Charge Characteristics

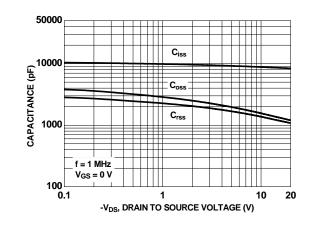


Figure 8. Capacitance vs Drain to Source Voltage

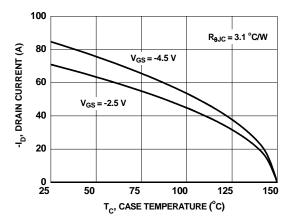


Figure 9. Maximum Continuous Drain Current vs Case Temperature

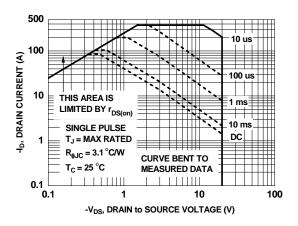


Figure 10. Forward Bias Safe Operating Area

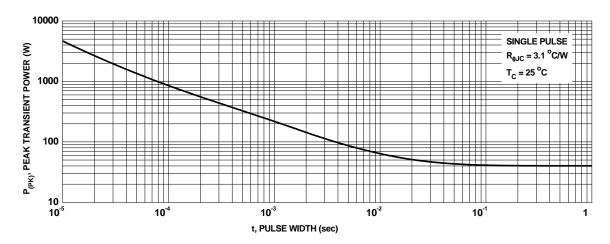


Figure 11. Single Pulse Maximum Power Dissipation






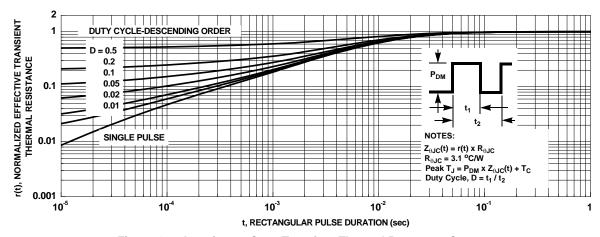



Figure 12. Junction-to-Case Transient Thermal Response Curve

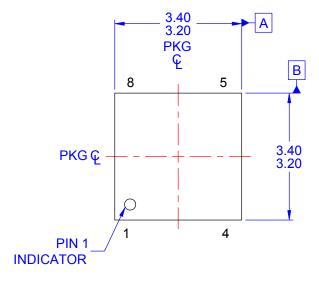


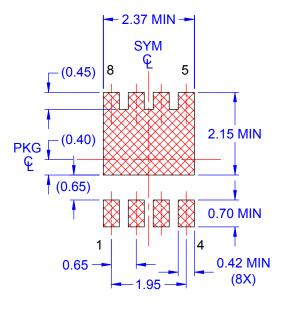



LAND PATTERN RECOMMENDATION

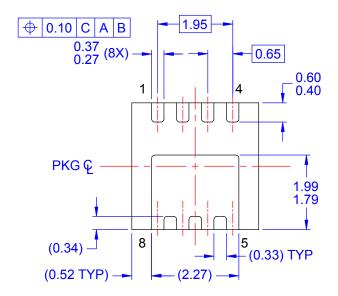

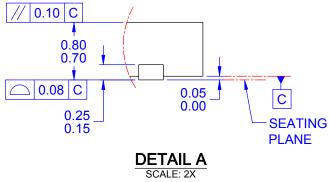

#### NOTES: UNLESS OTHERWISE SPECIFIED

- A) PACKAGE STANDARD REFERENCE: JEDEC MO-240, ISSUE A, VAR. BA,
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH. MOLD FLASH OR BURRS DOES NOT EXCEED 0.10MM.
- D) DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009.
- E) DRAWING FILE NAME: MKT-PQFN08SREV1



ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative